

# A Smart Decision Support System for Smart City

Marco Bartolozzi, Pierfrancesco Bellini, Paolo Nesi, Gianni Pantaleo and Luca Santi

Distributed Systems and Internet Technologies Lab, DISIT Lab – <http://www.disit.org>  
Department of Information Engineering (DINFO), University of Florence, Italy  
[paolo.nesi@unifi.it](mailto:paolo.nesi@unifi.it), [pierfrancesco.bellini@unifi.it](mailto:pierfrancesco.bellini@unifi.it), [gianni.pantaleo@unifi.it](mailto:gianni.pantaleo@unifi.it)

**Abstract**— Smart City frameworks address new challenges to improve efficiency and sustainability of services for citizens, providing additional features and allowing the city environment to adaptively configure according to collected data and information. To this aim, Decision Support Systems, DSS, have recently been acquiring increasing importance in such a context. This paper presents a Smart Decision Support System for Smart City, based on the evolution of the Analytical Hierarchical Process model, which has been integrated with the Italian Flag 3-values logic representation. Original contributes of the this work are (i) the integration of the hierarchical model and probabilistic values and their propagation in the decision tree, (ii) the capability integrating social and data processes by accessing and querying external repositories, to gather Smart City related data assisting decision makers, through the use of properly defined functions and thresholds; (iii) the system is designed as a collaborative framework, allowing multiple users to share, clone and modify models and different instances of a same model. The proposed system has been validated in real cases by exploiting decision processes on smart city services of *Km4City* solution in use in the Florence metropolitan area <http://www.disit.org/km4city>.

**Keywords** — Smart City, Decision Support Systems, System Thinking, Analytical Hierarchical Process, Italian Flag.

## I. INTRODUCTION

The term Smart City refers to an urban system aiming at fulfilling efficiency and sustainability criteria [1] within critical domains and application areas such as mobility, energy and environment management, administrative services etc. This goal can be achieved by exploiting Public Administration, PA, Open and Private Data, OD, PD, different kinds of sensors and other data sources, upon which structured information and knowledge can be extracted and inferred, in order to make infrastructures and services more accessible and interactive. A city is composed of several different operational environments, infrastructures and networks which can be improved and optimized through the application of advanced solutions. The necessity arises to assess the current status of the city (through data coming from sensor networks placed in the urban area) and make decisions according to specific objectives and goals to be achieved. This implies the development of deeply connected infrastructures, evolving into and together with the Smart City environment. At the basis of such an approach there are computational methods and Decision Support Systems, DSS, widely applied in many fields and domains for assisting the automation of decisional process, consisting in analyzing and understanding the different needs and requirements to be met, taking into account relative benefits and disadvantages of

all the constituting elements. DSSs have been widely studied and used in a large variety of application areas, from clinical DSS to business and management, including also Smart City. This is due to their flexibility in assisting decision-making processes; they can actually be employed to solve even not well structured problems, combining also complex analytical models and techniques with more traditional data access and data recovery processes. Several approaches and techniques, supporting the decision-making process, have been recently proposed and investigated. Among them, goal models, goal state machines [2] integrated with systematic analysis have been proved to be useful in describing a system domain by properly capturing its requirements and allowing the evaluation of objectives achievement [3]. Techniques such as evolutionary algorithms, neural networks, fuzzy systems, and Bayesian networks have been widely used to support financial decision in economics and finance [4], [5], [6]. DSS can be divided into five main categories, followed the taxonomy proposed by Power [7]: *Model-driven DSS* are focused on extrapolating analytical, mathematical or quantitative models from a general problem-solving task [8]; *Communication-driven DSSs* provide coordination and communication among multiple users working on shared tasks and activities, reaching collaborative and shared decision-making; *Data-driven DSSs* support manipulation of data time series (large data collections, historical, real-time, internal or external data, etc.), accessible through querying a data warehouse for specific purposes; *Document-driven DSSs* are represented by computerized frameworks, integrating storage and computational technologies in order to support unstructured document retrieval and analysis; *Knowledge-driven DSSs* rely on external knowledge in the form of best practices, computational procedures and rules, expert knowledge and problem solving expertise and other source of information which can be stored in logical structures, accessible and readable by machines and software agents [9].

Recent solutions rely on System Thinking paradigms, oriented to problem solving and decision support in Smart City environments. According to this approach, a modern city or urban area is seen as a highly interconnected entity, from a social and technological point of view. System Thinking has been recently adopted in Smart City contexts, as in the STEEP project [10] for energy saving planning and interventions, and also in wider contexts, such as rural environments [11], without integrating data and community opinions. Some software tools are available in the Web, developed for supporting evidence-based reasoning handling also uncertainty, such as Perimeta

[12], which has the limits in mathematical models and verification, collaborative aspects and direct access to data.

The solution proposed in this paper consists of a mixed *Communication-, Data-, and Knowledge-driven* “Smart” DSS to assist decisional processes in the Smart City context. For “Smart” we intend the capacity of keeping decision assessment process always updated, on the basis of data collected from databases and stakeholders, and thus to support decision makers in a more efficient manner. The proposed approach is integrated into the *Km4City* solution (knowledge model for the city). *Km4City* is a Smart City environment (*Km4City* Smart City ontology and Smart City development tools) for data aggregation and semantic interoperability, and with API for mobile and web applications [13]. **The paper is organized as follows:** Section II is dedicated to explain requirements and the system architecture of the proposed Smart DSS. Section III describes the Smart DSS model used (<http://smartds.disit.org>). Section IV analyzes a real case study, in which the *Km4City* Service and model [13] has been exploited for retrieving data for the Florence metropolitan area. Section V is left for conclusions.

## II. REQUIREMENTS AND SYSTEM ARCHITECTURE

Typically, a city presents several Decision Makers according to the different areas: mobility and transport, cultural heritage, commercial, environment, energy, etc. Each of them have under control a number of infrastructures on the same area, that are also connected each other and thus they share the same ground model of the city, for example the *Km4City* model [13]. For example, the mobility and transport city manager may need to manage the construction of a new metro line, which implies a numbers of progressive works. Moreover, even commercial operators need to make decision, and may benefit of accessing to a part of the same data. In this context, a number of decisions may need to be made to recover from unplanned situations such as: moving bus stops, changing street directions, changing planned work, open a new commercial activity, etc. In this sense, similar decision models/processes can be applied to different areas of the city grounded on different data. A successful decision process may be used to learn and tune the model for a successive application. A successful decision subprocess/subtask applied in given context by a different Decision Maker (even of a different area) may be very profitably reapplied/reused in other contexts.

The proposed Smart DSS is a mixed *Communication-, Data-, and Knowledge-driven* based on Analytical Hierarchical Process, AHP, [14] for automatic decision, and collaborative work on decision processes. The AHP model is a general evaluation method supporting complex decision-making processes [14]. It is based on values and judgments of individuals and groups, where judgments are determined on the basis of a multilevel hierarchical structure in order to achieve some defined goals. The AHP model allows to decompose the decision problem in a hierarchy of sub-problems, which are easier to understand and can be analyzed independently. The AHP model has been modified (as described in the following) in order to integrate the Italian Flag (IF) 3-values logic representation and model [15], which allows handling uncertainty measures. The proposed system is provided with

decision models built in a light collaborative manner among decision makers, who can share, reuse/clone and modify models, as well as use different instances of a same model in different context (e.g., geographically located in different locations of the city, applied on different data). The estimation of the IF probabilities and weights of decisional criteria can be determined by (i) directly accessing Smart City Data posing queries to RDF (resource description framework) stores in SPARQL (recursive acronym for **SPARQL** Protocol and RDF Query Language), and querying SQL (Structured Query Language) relational databases; (ii) assessing the citizens’ opinions via live polls or questionnaires, interviews and workshops getting users’ opinions; (iii) values derived from external sources and experts.

The proposed Smart DSS is implemented as a client-server application, see Figure 1. The client side module allows the Decision Makers to model, clone, share and activate the computing of decision processes. The client offers the capabilities of defining logical functions (in order to gather data and information from databases), as well as the creation of pairwise comparison matrices and threshold values to estimate IF values, decisional criteria weights and to calculate the finale decision coefficients. The Decision Makers can exploit models and tools to verify and validate the computational decision processes, as described in the following.

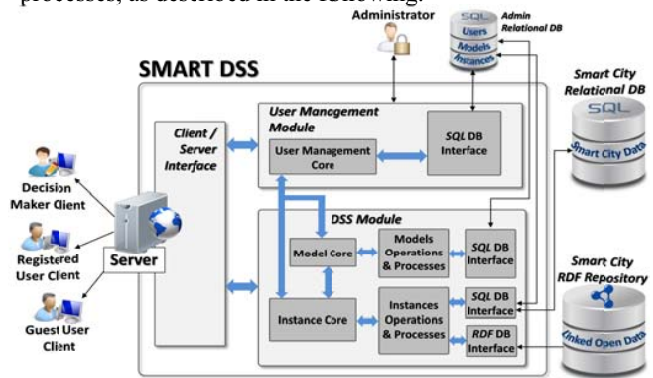


Fig. 1. Smart DSS Block Architecture.

The server-side is divided into two main modules: the *DSS module* and the *User Management module*. The former is in charge of managing DSS modules and instances, as well as the operations performed on them from users, accordingly to their roles and privileges; the latter is used by the administrators to control the different types of registered users and roles.

## III. THE ENHANCED DSS MODEL

The decision model at the basis of the Smart DSS presented in this paper has been developed according to the System Thinking paradigm, focusing on the AHP model [14] integrated with the IF (Italian Flag) representation structure, which is a confidence-based 3-values logic used to measure uncertainties (often reported in users opinion rates and interviews, or from soundages, questionnaires on the citizens [15]). Decision makers create decision models, defining criteria and their hierarchy and decomposition in sub-processes. The term “model” addresses only the hierarchical structure without internal data. The term instance is connected directly to a model and contains the data (in terms of IF probability values and criteria priority weights) required to calculate the final

decision (as later described). The proposed solution provides the capability of estimating such values through logical functions properly defined by decision makers on the basis of semantic query results on Smart City ontologies and RDF Store, or on other databases.

The development of the decisional process is carried out through the steps described in next subsections: first, the hierarchical decision model is defined; then, one or more instances can be generated from each model by filling the IF values for decisional criteria (through different modalities, see Section III.C). Subsequently, the matrix for pairwise comparison has to be generated and weights for decisional criteria have to be determined. Finally, a bottom-up process performs an overall consistency check of IF probabilities for inner nodes and calculate the final decision, which is represented by the estimated IF values of the Goal (root) node.

### A. Implementation of the Smart DSS Model

As a *first phase*, the decision makers deeply analyzes the problem, organizing it in a hierarchical tree composed by different levels (in the proposed solution, if this work has been already performed or partially performed in the past, he/she can reuse a decision process or some parts). According to the AHP model, at the top of the hierarchy is the Goal, which is the root of the decision tree. The nodes belonging to the first level under the goal represent the decisional criteria which have been defined to achieve the goal. Lower level nodes describe sub-criteria, as well as alternatives to reach the goal, and even properties of corresponding upper level criteria, organized in as many levels as those necessary to have a complete description of the problem. The *successive step* is the assignment of weights to each node. Such weights are defined as priority values (so that their sum, calculated for all criteria belonging to a same level, yields 1). In order to estimate priority weights, a set of pairwise comparison matrices is built. Each level identifies a different comparison matrix, in which the criteria of the considered level are compared in pairs using the Saaty's scale [14]. This rating scale assigns integers from 1 to 9 according to the relative importance between the compared elements from equal importance to extreme importance. The procedure of pairwise comparison matrix generation, oriented to priority weights calculation, is described in Section III.D.

### B. Italian Flag

The IF model is a three-value logic with measures of uncertainties [15], and is adopted as a suitable representation of process uncertainty in the proposed DSS. It has been designed to receive input data from different sources, including citizens and experts opinions and feedbacks (therefore, potentially handling also uncertainty situations, e.g., “*I don't have an opinion yet*”). In such contexts, an event may occur or not, as well as the reliance that a generic proposition may be true or false, can be only partial, so that some level of belief is assigned to an uncertain state. Thus, given a generic proposition or event  $E$ , we can define its probability  $P(E)$  as the evidence for  $E$ ,  $P(not(E))$  as the evidence against  $E$  and  $1 - P(E) - P(not(E))$  as the measure of uncertainty. IF is a graphical representation of the above defined triple form  $[P(E), 1 - P(E) - P(not(E)), P(not(E))]$ , where  $P(E)$  is depicted as a green bar,  $1 - P(E) - P(not(E))$  is depicted in white and  $P(not(E))$  in red, as illustrated in Figure 2. A compact way to

represent the IF record is to indicate explicitly the interval  $[P(E), 1 - P(not(E))]$ , see Figure 2.

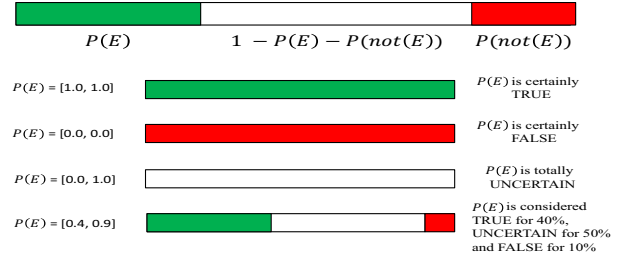


Fig. 2. Three-value logic IF representation for a generic proposition or event  $E$ , with some examples explained.

In the following, we use the notation  $g=P(E)$ ,  $r=P(not(E))$  and, consequently,  $w = 1 - (g + r)$  to define the green, red and white probability values, respectively. A general schema for the modified AHP hierarchy including the IF is shown in Figure 3, in which the notation that will be used in the following is introduced.

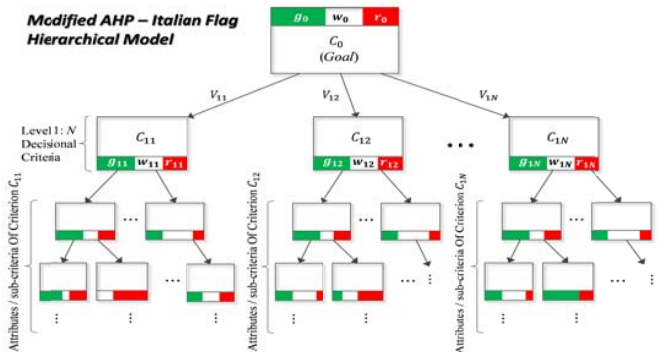


Fig. 3. General schema of the enhanced AHP hierarchical model.

### C. Generation of Model Instances

Once the hierarchical decision model is created, the decision makers can create an instance of a previously generated model, by filling the nodes of the hierarchical model with IF probabilities. Such values can be gathered from different sources:

1) *Data from databases*: in this case, the system allows the decision maker to pose, for each node/process, queries to RDF semantic repository (by providing valid SPARQL endpoint), as well as to a generic SQL relational database. Queries can be also used to get results from some online questionnaires. For instance, one would assess (i) the best new position for a bus stop that has to be moved in any way from a former location, or (ii) the acceptable compromise from energy saving and illuminating the nights in a garden area, or (iii) the suitability of a place to open a new commercial utility in a certain area of the city, taking into account, how many commercial services of the same type are located in the neighborhood, how many public transport facilities reach and connect the chosen urban area etc. Such expected query results are supposed to be numerical. In order to obtain the required IF values, the decision maker can define logical functions by combining queries and comparing results wrt thresholds.

2) *Data coming from stakeholders opinions and feedbacks* gathered by interviewing selected stakeholders or citizens groups. Opinions are directly mapped into IF values, assigning to the green value the percentage of opinions in favor of the addressed decisional condition or criterion, to the white value the percentage of uncertainty opinions (as well as answers not provided), and to the red value the percentage of opinions against the condition. After translating opinions into statistical values, these are used to fill the decision nodes tree as IF records.

3) *Expert data*: this kind of data is represented, for instance, by statistical values coming from the decision maker's experience, existing studies and collaborative workshops. Such entries are ready to be directly inserted as IF probabilities into each node of the hierarchy.

#### D. Pairwise Comparison Matrix and Priority Weights

This step is devoted to identify and estimate the weights to be associated with each decisional criterion. As mentioned in Section III.A, this is done by using the evaluation matrix, whose single elements are obtained by pairwise comparisons of the decision criteria: Considering a generic level  $\bar{l}$  of the hierarchy, composed of  $N$  criteria  $C_{\bar{l}1}, \dots, C_{\bar{l}N}$  the pairwise comparison matrix is defined as:

$$P_{\bar{l}} = \begin{bmatrix} p_{11}^{\bar{l}} & \cdots & p_{1N}^{\bar{l}} \\ \vdots & \ddots & \vdots \\ p_{N1}^{\bar{l}} & \cdots & p_{NN}^{\bar{l}} \end{bmatrix}$$

where elements  $p_{ij}$  are the Saaty's scale values for comparison between criteria. The pairwise comparison matrix  $P$  is composed of finite elements, it is positive-definite (that is, all minors of  $P$  are positive), its diagonal elements are equal to 1, and symmetrical elements stand in a reciprocal relationship:

$$p_{ij}^{\bar{l}} = \frac{1}{p_{ji}^{\bar{l}}}, \quad 1 \leq i, j \leq N$$

This last property is in agreement with the Saaty's rating scale.

Once the pairwise comparison matrix  $P_{\bar{l}}$  has been generated for a certain level  $\bar{l}$  of the hierarchy, the priority weights for corresponding criteria are determined through the following procedure: first, a normalization by column is made over  $P$ , thus obtaining the  $\hat{P}$  matrix. Keeping the assumption to have  $N$  nodes at level  $\bar{l}$ , the  $\hat{P}$  matrix is defined as:

$$\hat{P}_{\bar{l}} = \begin{bmatrix} \hat{p}_{11}^{\bar{l}} & \cdots & \hat{p}_{1N}^{\bar{l}} \\ \vdots & \ddots & \vdots \\ \hat{p}_{N1}^{\bar{l}} & \cdots & \hat{p}_{NN}^{\bar{l}} \end{bmatrix} = \begin{bmatrix} \frac{p_{11}^{\bar{l}}}{\sigma_1} & \cdots & \frac{p_{1N}^{\bar{l}}}{\sigma_1} \\ \vdots & \ddots & \vdots \\ \frac{p_{N1}^{\bar{l}}}{\sigma_1} & \cdots & \frac{p_{NN}^{\bar{l}}}{\sigma_1} \end{bmatrix}$$

where:

$$\sigma_1 = \sum_{k=1}^N p_{k1}^{\bar{l}}, \dots, \sigma_N = \sum_{k=1}^N p_{kN}^{\bar{l}}$$

Then, priority weights are obtained by computing the arithmetic mean over the rows of the normalized matrix:

$$V_{\bar{l}1} = \frac{1}{N} \sum_{k=1}^N \hat{p}_{k1}^{\bar{l}}, \dots, V_{\bar{l}N} = \frac{1}{N} \sum_{k=1}^N \hat{p}_{kN}^{\bar{l}}$$

#### E. Model Consistency Check and Final Decision Computation

Once a creation of a certain instance of a model is completed, before executing the final decision computation, the system is supposed to have in input well defined values for criteria priority weights, as well as for the IF values of criteria at lowest level (leaf criteria). For inner criteria, IF probabilities can be defined by the decision maker (in one of the ways explained in Section III.C), or they can be left undefined; in this last case, they are calculated through the procedure described in the following. Such procedure is also in charge of validating the consistency of IF values for inner nodes where they are defined, in order to resolve potential inconsistencies between calculated values and existing ones. Following a bottom-up process, consistency for an inner  $i$ -th criterion at level  $\bar{l}$  composed of  $N$  nodes, is calculated as follows:

$$\begin{aligned} g_{\bar{l}} &= \sum_{k=1}^N g_{[\bar{l}+1]k} \cdot V_{[\bar{l}+1]k} \\ r_{\bar{l}} &= \sum_{k=1}^N r_{[\bar{l}+1]k} \cdot V_{[\bar{l}+1]k} \\ w_{\bar{l}} &= \sum_{k=1}^N w_{[\bar{l}+1]k} \cdot V_{[\bar{l}+1]k} \end{aligned} \quad (1)$$

When an inconsistency occurs (that is, when the difference between calculated and existing values exceeds a user defined confidence threshold), the decision maker can choose among three alternatives: (A) set new bounds, by replacing existing values with the ones calculated in (1); in this case, the decision maker can select among different alternatives, e.g. setting new values for IF bands upper bound, lower bound or both; (B) replace existing values with those coming from new interviews and opinions; (C) leave the IF values as they are, without modifications. The IF values calculated by the system will be used for computation of the final decision. Thus, the decision maker is assisted in minimizing errors when filling instance values, due to complex and large model structures, as well as to the fact that models and instance can be shared, cloned and modified as part of a collaborative framework, increasing the risk of propagation of inconsistencies. At end of the whole bottom-up process, the IF values calculated in (1) for the Goal (root) node (for  $\bar{l} = 0$ ) yields the final decision triple result, providing that to each leaf criterion a valid IF record is assigned, and that each priority weight is defined. The final outcome is defined as:

- *Positive (favorable) outcome*, if  $g > th$ ;
  - *Negative (not favorable) outcome*, if  $r > th$ ;
  - *Uncertain outcome*, if  $g \leq th$  and  $r \leq th$ ;
- where  $th$  is a threshold imposed by the decision maker.

#### IV. A CASE STUDY

In this section, a real world case study is presented, in order to show a complete workflow and processes to create and instantiate a decisional model in our Smart DSS. The addressed process has to determine whether it is viable or not to move a bus stop from a certain  $\langle Location1 \rangle$  to another  $\langle Location2 \rangle$ . It is a typical example in which a smart DSS can be useful when dealing with the necessity of diverting a part of the public transportation service, whether temporarily or not, due for instance to modifications to the urban area road map, changes of traffic conditions, temporary works to public infrastructures, or concurrently to the organization of big events etc. IF probability values have been filled by collecting interviews and opinions from citizens. The *Km4City* [3] ontology, designed and developed at our DISIT Lab is used for gathering Smart City data. The system may query different repositories for each process/criterion.

TABLE I. DECISIONAL CRITERIA USED TO BUILD THE HIERARCHICAL MODEL FOR THE PROPOSED USE CASE (BUS STOP MOVING WITHIN THE CITY).

Goal	1 <sup>st</sup> Level Criteria		2 <sup>nd</sup> Level Criteria		3 <sup>rd</sup> Level Criteria	
	Description	Data Type	Description	Data Type	Description	Data Type
G (= C0): Move a Bus Stop from $\langle Location1 \rangle$ to $\langle Location2 \rangle$	C1: Modifications to the original Bus line route		C1.1: Distance from $\langle Location1 \rangle$	Q		
			C1.2: Keep the new bus stop on the same street of $\langle Location1 \rangle$	O		
	C2: Evaluation of logistic problems of new bus stop location		C2.1: Presence of works in the immediate vicinity of $\langle Location2 \rangle$	M		
			C2.2: Evaluation of roadway width at $\langle Location2 \rangle$	Q		
	C3: Evaluation of traffic flow		C3.1: Private vehicles traffic flow in proximity of $\langle Location2 \rangle$	C3.1.1: Opinions from citizens		O
				C3.1.2: Reports from Public Administration		O
				C3.1.3: Data from Smart City repository		Q
	C4: Points of Interest in proximity (the same street) of $\langle Location2 \rangle$		C4.1: Commercial Services (shops & markets)	C4.1.1: Opinions from citizens		O
				C4.1.2: Data from Smart City repository		Q
	C5: Number of bus lines passing by the old bus stop	Q	C4.2: Hospitals and healthcare centers		Q	
				C4.3: Educational Institutions (schools and University)		Q

For this use case, a Smart DSS model has been designed. A tabular view of the model and the chosen decisional criteria is shown in Table I, where the abbreviations in the "Data Type" field denote the different data sources: "Q" indicates that data from which the IF values are gathered from the *Km4City* repository through SPARQL queries; "O" stands for opinions and interviews collected among citizens and other actors like business stakeholders and Public Administration; "M" means that IF probabilities are provided by the decision maker. The field is left empty whenever IF values are not defined (this case

may occur only for inner nodes as stated in the requirements to be met in Section III.E); in this case, they will be calculated during the computation of the decision. Note also that the notation of criteria at different levels is slightly different from the one adopted in the general theoretical exposure in Section III.B and III.D, for a matter of clarity. In Table II, generalized SPARQL queries and probability values used (together with priority weights are reported, whose definition is omitted for brevity) to run the simulation of final decision computation. The result of the decision process is shown in Figure 4; in this simulation, considering a decision threshold of 0.5 (50%), the final decision results to be in favor of the defined goal; actually the IF values for the goal (root node) results to be  $g_{\sigma}=53.4\%$ ,  $r_{\sigma}=38.6$  and  $w_{\sigma}=8.0\%$ . The solution provided allows keeping trace of the evolving values for the Smart DSS processes set up over time. The data obtained from the day by day activity collected from databases may change the IF of the global decision process. This fact does not mean that one would change decision in real time, while that the trends have to be monitored by the decision makers to detect dysfunctional cases and taking decisions.

TABLE II. SPARQL QUERIES AND PROBABILITY VALUES USED FOR CRITERIA DESIGNED FOR THE STUDIED REAL USE CASE (LISTED IN TABLE I). PREFIXES ARE DEFINED FOR THE FIRST QUERY ONLY.

Criterion	Data Type	Value / Query Function
C1.1	SPARQL Query	$g = 1.0; r = 0.0; w = 0.0$ if $Q \leq Th_{11}$ ; $g = 0.5; r = 0.25; w = 0.25$ if $Q > Th_{11}$ ; Where Q: SELECT (bif:st_distance(bif:st_point( $\langle LONG1 \rangle$ , $\langle LAT1 \rangle$ ), bif:st_point( $\langle LONG2 \rangle$ , $\langle LAT2 \rangle$ ))) as ?dist WHERE { } Note: $Th_{11}$ is the defined threshold; $\langle LONG1 \rangle$ and $\langle LAT1 \rangle$ represent longitude and latitude of $\langle Location1 \rangle$ (similarly for $\langle LAT2 \rangle$ and $\langle LONG2 \rangle$ ).
C1.2	Citizens Opinion	$g = 0.8; r = 0.2; w = 0.0$ .
C2.1	Manually Inserted	$g = 0.0; r = 1.0; w = 0.0$ .
C2.2	SPARQL Query	$g = 0.4; r = 0.6; w = 0.0$ if $Q \leq Th_{22}$ ; $g = 0.6; r = 0.4; w = 0.0$ if $Q > Th_{22}$ ; Where Q: SELECT ?roadwidth WHERE { ?road km4c:roadName $\langle STREET\_TOPONYM \rangle$ . ?road km4c:containsElement ?roadE1. ?roadE1 km4c:width ?roadwidth.} Note: $Th_{22}$ is the defined threshold; $\langle STREET\_TOPONYM \rangle$ represents the street name of $\langle Location2 \rangle$ .
C3.1.1	Citizens Opinion	$g = 0.6; r = 0.1; w = 0.3$ .
C3.1.2	Reports from PA	$g = 0.2; r = 0.65; w = 0.15$ .
C3.1.3	SPARQL Query	$g = 0.4; r = 0.6; w = 0.0$ if $Q \leq Th_{313}$ ; $g = 0.6; r = 0.4; w = 0.0$ if $Q > Th_{313}$ ; Where Q: SELECT ?TF1ow WHERE { km4cr:km4c:concentration ?TF1ow.} Note: $Th_{313}$ is the defined threshold; $\langle \#SENS \rangle$ is the identifier of a traffic sensor.
C3.2	Reports from PA	$g = 0.6; r = 0.3; w = 0.1$ .
C4.1.1	Citizens Opinion	$g = 0.4; r = 0.5; w = 0.1$ .
C4.1.2	SPARQL Query	$g = 0.15; r = 0.75; w = 0.1$ if $Q \leq Th_{412}$ ; $g = 0.75; r = 0.15; w = 0.1$ if $Q > Th_{412}$ ; Where Q: SELECT (COUNT(?service)) WHERE { ?road km4c:roadName $\langle STREET\_TOPONYM \rangle$ . ?service a km4c:Shopping. ?service km4c:isInRoad ?road.}

		Note: $Th_{412}$ is the defined threshold; <STREET_TOPONYM> represents the street name of <Location2>.
C4.2	SPARQL Query	$g = 0.35; r = 0.45; w = 0.2$ if $Q \leq Th_{42}$ ; $g = 0.55; r = 0.25; w = 0.2$ if $Q > Th_{42}$ ; Where Q: SELECT (COUNT(?service)) WHERE { ?road km4c:roadName <STREET_TOPONYM>. ?service a km4c:HealthCare. ?service km4c:isInRoad ?road.} Note: $Th_{42}$ is the defined threshold; <STREET_TOPONYM> represents the street name of <Location2>.
C4.3	SPARQL Query	$g = 0.25; r = 0.35; w = 0.4$ if $Q \leq Th_{43}$ ; $g = 0.65; r = 0.2; w = 0.15$ if $Q > Th_{43}$ ; Where Q: SELECT (COUNT(?service)) WHERE { ?road km4c:roadName <STREET_TOPONYM>. ?service a km4c:Education. ?service km4c:isInRoad ?road.} Note: $Th_{43}$ is the defined threshold; <STREET_TOPONYM> represents the street name of <Location2>.
C5	SPARQL Query	$g = 0.7; r = 0.3; w = 0.0$ if $Q \leq Th_{313}$ ; $g = 0.3; r = 0.7; w = 0.0$ if $Q > Th_{313}$ ; Where Q: SELECT (COUNT(?line)) WHERE { km4cr:<BUS_STOP> km4c:hasSection ?x. ?line km4c:hasRoute ?x.} Note: $Th_5$ is the defined threshold; <BUS_STOP> is the identifier of the bus stop placed at <Location1>.

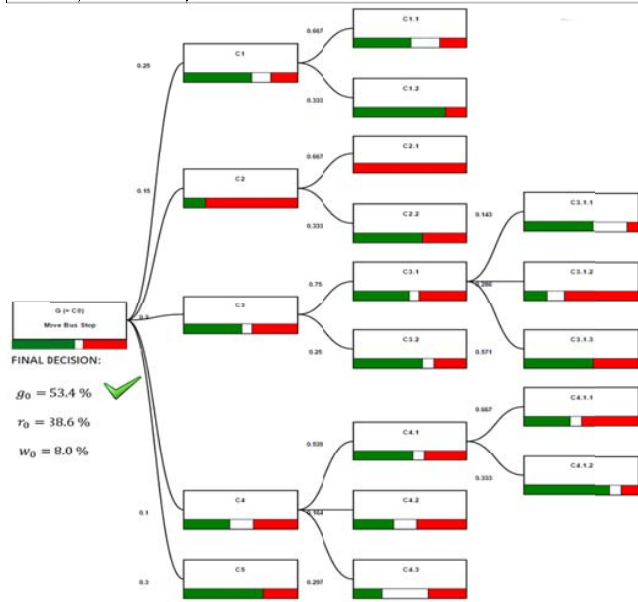


Fig. 4. Simulation results for the considered use case. Considering a 0.5 value for the decision threshold, the final decision results to be in favor of the proposed goal, yielding the following IF of the goal (root node):  $g_0=53.4\%$ ,  $r_0=38.6\%$ ,  $w_0=8.0\%$ .

## V. CONCLUSIONS

A Smart DSS for smart city has been presented, designed as an evolution of the System Thinking model through the integration of AHP model with the IF representation. In addition, the Smart DSS allows the evaluation of the consistency of IF values, and the definition of a collaborative framework for the creation and management of decision models and instances by multiple users. The proposed system has been designed with a particular focus on supporting decision-making processes in a Smart City environment;

actually, it provides the capability of accessing Smart City related data (by querying external semantic repositories or relational databases), and using them to determine IF values leading to the final decision computation. The model and solution proposed is accessible on <http://smartds.disit.org>, please use [paolo.nesi@unifi.it](mailto:paolo.nesi@unifi.it) as user name, and “prova” as password. A case study has been studied and developed, in order to assess the effective capabilities and understand the expandability potential of the proposed solution.

## ACKNOWLEDGMENT

The proposed work and related activities have been developed within the Sii-Mobility Italian national project<sup>1</sup>. A special thanks to Florence Municipality for the collaboration in the context of Km4City and RESOLUTE H2020 projects.

## REFERENCES

- [1] S. Pellicer, G. Santa, A. L. Bleda, R. Maestre, A. J. Jara and A. G. Skarmeta, “A Global Perspective of Smart Cities: A Survey”, in Proc. of the 7<sup>th</sup> Int. Conf. on Innovative Mobile and Internet Services in Ubiquitous Computing (IMIS), pp. 439 - 444 , 2013.
- [2] L. Fu, X. Peng, Y. Yu, J. Mylopoulos, W. Zhao, “Stateful Requirements Monitoring for Self-Repairing Socio-Technical Systems”, in Proc. of 20<sup>th</sup> IEEE Int Conf. on Req. Eng. Conference (RE), pp. 121-130, 2012.
- [3] J. Horkoff and E. Yu, “Analyzing goal models: different approaches and how to choose among them”, in Proc. of the 2011 ACM Symposium on Applied Computing, pp. 675-682, 2011.
- [4] A. Augello, G. Pilato and S. Gaglio, “A conversational agent to support decisions in SimCity like games”, in Proc. of IEEE Int. Conf. on Semantic Computing, pp. 367- 372, 2009.
- [5] R. Olsen, “Computational Finance as a Driver of Economics (Developmental tools)”, IEEE Computational Intelligence Magazine, Vol. 3(4), pp.35-38, 2008.
- [6] H. Ltifi, G. Trabelsi, M. B. Ayed and A. M. Alimi, “Dynamic Decision Support System Based on Bayesian Networks”, International Journal of Advanced Research in Artificial Intelligence, Vol. 1(1), pp. 22-29, 2012.
- [7] D. J. Power, “Web Based and Model Driven Decision Support Systems: Concepts and Issues”, in Proc. of American Conf. on Information Systems, 2000.
- [8] D. J. Power and R. Sharda, “Model-driven decision support systems: Concepts and research directions”, Decision Support Systems, Vol. 43(3), pp. 1044-1061, 2007.
- [9] M. M. Hamad and B. A. Qader, “Knowledge-Driven Decision Support System Based on Knowledge Warehouse and Data Mining for Market Management”, Int. Journal of Application or Innovation in Engineering & Management (IJAEM), Vol. 3(1), 2014.
- [10] STEEP Project. [Online]. Available: <http://www.smartsteep.eu/>
- [11] Y. Knodratenko, “How Can Systems Thinking Be Used to Support Rural Development Decisions in Latvia”, Master Thesis, University of Lund, Sweden, 2003.
- [12] Perimeta tool. [Online]. Available: <http://www.bris.ac.uk/civilengineering/research/systems/projects/perimeta.html>
- [13] P. Bellini, M. Benigni, R. Billero, P. Nesi and N. Rauch, “Km4City Ontology Bulding vs Data Harvesting and Cleaning for Smart-city Services”, International Journal of Visual Language and Computing, Elsevier, Vol. 25, pp. 827-839, 2014.
- [14] T. L. Saaty, “Decision making with the analytic hierarchy process”, Int. Journal of Services Sciences, Vol. 1(1), pp. 83-98, 2008.  
J. P. Davis, J. W. Hall, “A software-supported process for assembling evidence and handling uncertainty in decision-making”, Decision Support Systems, Vol. 35(3), pp. 415-433, 2003.

<sup>1</sup> Sii-Mobility Project: <http://www.sii-mobility.org>