

www.snap4city.org www.snap4solutions.org



www.km4city.org

Developing Smart Applications & Business Intelligence Solutions

February 2024, Course, Part 8 https://www.snap4city.org/944 https://www.snap4city.org/577

DIGITAL TWIN SOLUTIONS TO SETUP SUSTAINABLE DECISON SUPPORT SYSTEMS AND BUSINESS INTELLIGENCE



Paolo Nesi, <u>paolo.nesi@unifi.it</u> <u>https://www.Km4City.org</u> <u>https://www.disit.org</u>









Be smart in a SNAP!



7-9 November 2023, Barcelona, Spain

SMARTCITY

EXPO WORLD CONGRESS Visit Snap4City in Hall 1

Developing Smart Applications & Business Intelligence Solutions

February 2024, Course, Part 8 https://www.snap4city.org/944 https://www.snap4city.org/577

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES












Certifications to the Course

 Certification of Participation will be provided to all the course attendees

 Certification of proficiency will be provided to everybody would like to get one. The Certification will be provided passing a short interview

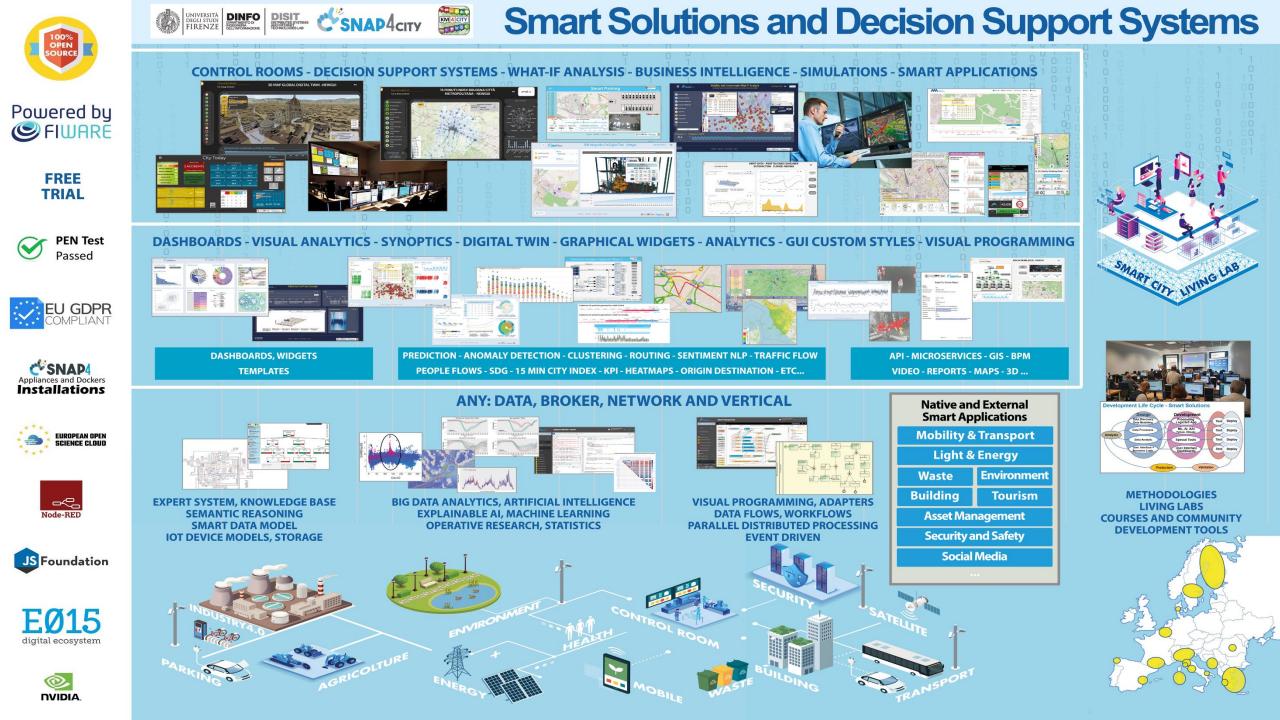


https://www.snap4city.org/944

On Line Training Material (free of charge)







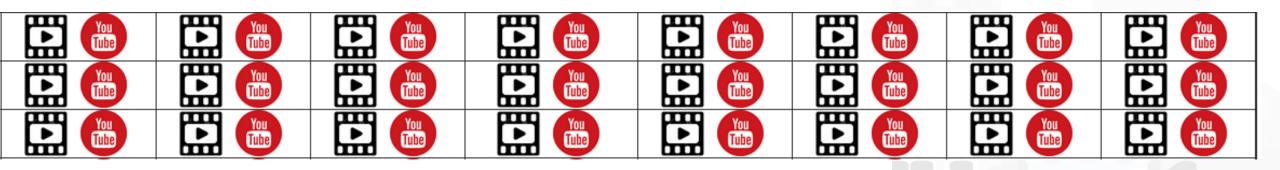

Snap4City (C), February 2024










Part 1: Overview for adopters, city, etc.

- Needs of the Operators vs platform
- Platform Overview: from data to interactive tools
- Data Analytics, Artificial Intelligence
- Some Cases by Domains: solutions vs analytics
- Other Cases and scenarios
- Overview of the next parts of the Course
- References to other training material

Part 1: Overview for adopters city/industry

<u>SLIDES</u>

Interactive Slides







Part 1: Overview for researchers and developers

- Context and Life Cycle
- Objectives and Tasks
- Snap4City platform overview
- Monitoring and control
- Mobility Monitoring and Control
- Environmental Monitoring and Control
- Human Behavior Monitoring
- Engaging via Mobile Apps
- Decision Support System: Immediate response and Tactic and Strategic Plans, via What-if Analysis
- Data Analytic: Artificial Intelligence, XAI, Machine and Deep Learning
- Developing on Snap4City
- Training Suggestions and DISIT publications
- Development Costs
- Accelerating on Smart City

Part 1: Overview for researchers / developers











https://www.snap4city.org/944

Title	Videos	Preliminary content description
Part 1: Overview <u>SLIDES</u> Interactive Slides		 Needs of the Operators vs platform Platform Overview: from data to interactive tools Data Analytics, Artificial Intelligence Some Cases by Domains: solutions vs analytics Other Cases and scenarios Overview of the next parts of the Course References to other training material
Part 2: Dashboards production and management <u>SLIDES</u> <u>Interactive Slides</u>	You Tube	 Recall on Snap4City Architecture Dashboards Purposes and Uses Main Data Kinds: data vs representations Dashboards Main Concepts and simple Widgets Creating a Snap4City Dashboard, wizard Multi Data Map Widget High Level Types, video, external services, synoptics Selector for the Multi Data Map Widget Data Inspector vs Data Processes Details Dashboard Management training material
Part 3: IOT App, Process Logic, Server Side Business Logic <u>SLIDES</u> <u>Interactive Slides</u>		 Recall on Snap4City Architecture Node-RED IOT App = Node-RED + Snap4City IoT App === Proc.Logic Examples of IOT App for Smartening Solutions Exploiting/Generating data by using: IoT App/Proc.Logic External Service <-> IoT App/Proc.Logic Dashboards <-> IoT App/Proc.Logic Server Side Business Logic








Part 2: Dashboard production and management

Part 2: Dashboards production and management



Interactive Slides



- Recall on Snap4City Architecture
- Dashboards Purposes and Uses
- Main Data Kinds: data vs representations
- Dashboards Main Concepts and simple Widgets
- Creating a Snap4City Dashboard, wizard
- Multi Data Map Widget
- High Level Types, video, external services, synoptics
- Selector for the Multi Data Map Widget
- Data Inspector vs Data Processes Details
- Dashboard Management



Part 3: IOT App, Process

Logic, Server Side

Interactive Slides

Business Logic

SLIDES



<u>You</u>

Tube

You

Tube

You

Tube



Part 3: IoT App, process logic, server side BL

- Recall on Snap4City Architecture
- Node-RED
- IOT App = Node-RED + Snap4City
 - IoT App === Proc.Logic
- Examples of IOT App for Smartening Solutions
- Exploiting/Generating data by using: IoT App/Proc.Logic
- External Service <-> IoT App/Proc.Logic
- Dashboards <-> IoT App/Proc.Logic
 - Server Side Business Logic
- training material









Part 4: Data Analytics

- Why and Where use DA, AI and XAI --> General Life Cycle
- Data Processing
- What is Data Analytics, DA and Artificial Intelligence, AI
- List of the most relevant available DA and AI Solutions
- Predictions and Anomaly detections
- Computing: Higher Level Types Data and their representations
- How AI/XAI, and Life Cycle
- Using DA, AI, XAI in Snap4City infrastructure
 - Data Analytics <--> IoT App / Proc.Logic
- Decision Support Systems and What-If Analysis
- Routing, Multimodal Routing, Dynamic Routing
- Business Intelligence and Visual Analytics

Part 4: Data Analytics and Artificial Intelligence

SLIDES


Interactive Slides







Part 5: Data Ingestion and Interoperability

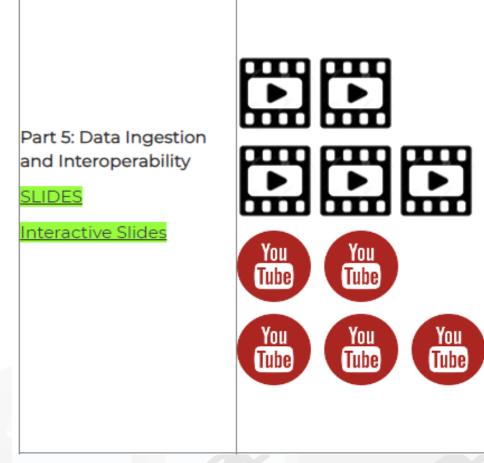

- When Solutions and tools for Data Ingestion and Interoperability are needed
- Overview of Snap4City Data Storage and Stack
- Knowledge Base: Modelling and Setting Up
- High Level Types vs Ingestion Process
- Data Ingestion Strategy and Orientation
- Ingestion of Points of Interest with POI Loader
- Models vs Devices/Entities and Registration
- Verification of Data Ingestion
 - Digital Twin Data Inspector vs Data Processes Details
 - My Data Dashboard Dev to assess data on Open Search Storage
- An Integrated Example for Time Series
- Entities Ingestion with Data Table Loader
- High Performance Ingestion via Python
- FIWARE Smart Data Models on Snap4City
- Ingestion of MyKPI with Proc.Logic / IoT App







Part 6: Platform Architecture, interop and Deploy

- Snap4City Architecture
- Interoperability of Snap4City Platform
- Interoperability with respect to Hardware staff
- Adding Features and Modules to Snap4City
- FIWARE and Snap4City
- Snap4City vs State of the Art Solutions
- Smart City planning with Snap4City Team Support
- The Role of the Living Lab Support
- Snap4City Platform: Administration
 Overview
- Snap4Tech: Smart Solutions as a Service
- Deploy Snap4Tech solutions: Docker Based

Part 6: Snap4City Platform Architecture, Interoperability, Management and Deploy

SLIDES

Interactive Slides









Parts 7 & 8: API, Mobil, Business Intelligence

- Smart City API: Internal and External
- Concepts and tools for using Knowledge Base, ServiceMap, API
- Federated Knowledge Bases and Smart City APIs
- Advanced Smart City API
- Access to Protected data
- Forging and managing: Mobile and Web Apps, MicroApplications
- Web and Mobile App Development Kit
- Developing in the smart city IoT/WoT context
- Smart Solutions Development Life Cycle
- Analysis for Innovation (Co-Creation and Co-Working)
- Design: Data, Data Models, Data Relationships
- Design & Develop: Data Processes Proc.Logic / IoT App
- Design & Develop of Data Analytics
- Design & Develop: user interfaces, visual tools
- Visual Analytic vs Data Analytics: Client Side Business Logic Intelligence
- Design and Control of Smart Applications Snap4City (C), February 2024

Part 7: Exploiting Snap4City API, and Web/Mobile Applications SDK

SLIDES

Interactive Slides

Part 8: Developing Smart Applications & Business Intelligence Solutions

SLIDES

Interactive Slides



You

Tube

You

Tube

<u>You</u>

Tube







Snap4City Training vs Targets

- Estimate Indicators: P1, P2, P3, P4, P5
 - IoT App/Proc.Logic JavaScript, Data Analytics, Dashboards to see data and results
- Load additional data: P1, P2, P3, P5
 - IoT App/Proc.Logic JavaScript, IoT Directory, ServiceMap, advanced interoperability, Dashboards to see them
- Performing AI/XAI on accessible data: P1, P2, P3, P4, P5 (P8)
 - IoT App/Proc.Logic JavaScript, ServiceMap, ASCAPI, Python, Dashboards to see data/results
- Developing Business intelligence: P1, P2, P3, P7, P8
 - IoT App/Proc.Logic JavaScript, Dashboards to see them, ASCAPI, CSBL for making them intelligent, JavaScript
- Developing Web and Mobile Apps: P1, P2, P3, P7, P8
 - ServiceMap, ASCAPI, Dashboards
- Deploy, install, test and management: P1, P2, P3, P6
 - IoT App/Proc.Logic JavaScript, ServiceMap, Dashboards to see them







Note on Training Material

- Course 2023: <u>https://www.snap4city.org/944</u>
 - Introductionary course to Snap4City technology
- Course https://www.snap4city.org/577
 - Full training course with much more details on mechanisms and a wider set of cases/solutions of the Snap4City Technology
- Documentation includes a deeper round of details
 - Snap4City Platform Overview:
 - <u>https://www.snap4city.org/drupal/sites/default/files/files/Snap4City-PlatformOverview.pdf</u>
 - Development Life Cycle:
 - https://www.snap4city.org/download/video/Snap4Tech-Development-Life-Cycle.pdf
 - Client Side Business Logic:
 - https://www.snap4city.org/download/video/ClientSideBusinessLogic-WidgetManual.pdf
- On line cases and documentation:
 - <u>https://www.snap4city.org/108</u>
 - <u>https://www.snap4city.org/78</u>
 - <u>https://www.snap4city.org/426</u>





DIPARTIMENTO DI INGEGNERIA DELL'INFORMAZIONE

DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB

1



Tech Overview

<u>https://www.snap4city.o</u>

rg/drupal/sites/default/f

iles/files/Snap4City-

PlatformOverview.pdf



Snap4City (C), February 2024

Snap4City Platform

Technical Overview

From: DINFO dept of University of Florence, with its DISIT Lab, <u>Https://www.disit.org</u> with its Snap4City solution

università degli studi FIRENZE

Snap4City:

UNIVERSITÀ DEGLI STUDI FIRENZE

- Web page: <u>Https://www.snap4city.org</u>
- <u>https://twitter.com/snap4city</u>
- <u>https://www.facebook.com/snap4city</u>

Contact Person: Paolo Nesi, Paolo.nesi@unifi.it

- o Phone: +39-335-5668674
- o Linkedin: https://www.linkedin.com/in/paolo-nesi-849ba51/
- o Twitter: https://twitter.com/paolonesi
- o FaceBook: https://www.facebook.com/paolo.nesi2





DIPARTIMENTO DI







UNIVERSITÀ DIGUI STUDI FIRENZE DINFO DISIT SNAP4city SNAP4Tech **Development Life-Cycle** https://www.snap4city.org/download/video/Snap4Tech-Development-Life-Cycle-v1-1.pdf From Snap4City: We suggest you to read the TECHNICAL OVERVIEW: https://www.snap4city.org/download/video/Snap4City-PlatformOverview.pdf https://www.snap4city.org https://www.snap4solutions.org https://www.snap4industry.org https://twitter.com/snap4city https://www.facebook.com/snap4city https://www.youtube.com/channel/UC3tAO09EbNba8f2-u4vandg Coordinator: Paolo Nesi, Paolo.nesi@unifi.it DISIT Lab, https://www.disit.org DINFO dept of University of Florence, Via S. Marta 3, 50139, Firenze, Italy Phone: +39-335-5668674

UNIVERSITÀ DEGLI STUDI FIRENZE DIMITMINIO DI MILLINGIA

1

Development https://www.snap4city.org/d ownload/video/Snap4Tech-**Development-Life-Cycle.pdf**











Client Side Business Logic

UNIVERSITÀ DIGLI STUDI FIRENZE DIMENSION ENCOMPANY





Client-Side Business Logic Widget Manual

From Snap4City:

- We suggest you read https://www.snap4city.org/download/video/Snap4Tech-Development-Life-Cycle.pdf
- We suggest you read the TECHNICAL OVERVIEW.
 - https://www.snap4city.org/download/video/Snap4City-PlatformOverview.pdf
- slides go to https://www.snap4city.org/577
- https://www.snap4city.org
- https://www.snap4solutions.org
- ps://www.snap4industry.org
- witter.com/snap4city
- ps://www.facebook.com/snap4city
- ://www.voutube.com/channel/UC3tAO09EbNba8f2-u4vandg

Coordinator: Paolo Nesi, Paolo.nesi@unifi.it DISIT Lab, https://www.disit.org DINFO dept of University of Florence, Via S. Marta 3, 50139, Firenze, Italy Phone: +39-335-5668674



https://www.snap4city.org/do wnload/video/ClientSideBusin essLogic-WidgetManual.pdf





- Register on <u>WWW.snap4city.org</u>
 - Subscribe on **DISIT Organization**
- You can:


UNIVERSITÀ Degli studi


FIRENZE

Access on basic Tools

INGEGNERIA DELL'INFORMAZIONE

- Access to a large volume of Data
- Create Dashboards
- Create IOT Applications
- Connect your IOT Devices
- Exploit Tutorials and Demonstrations

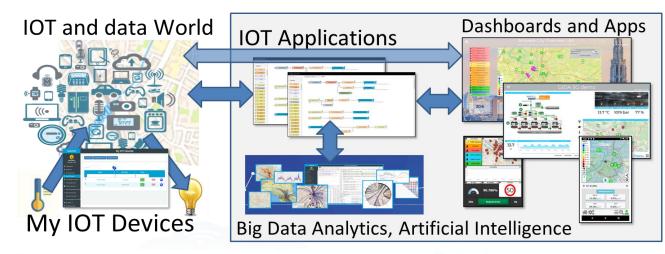

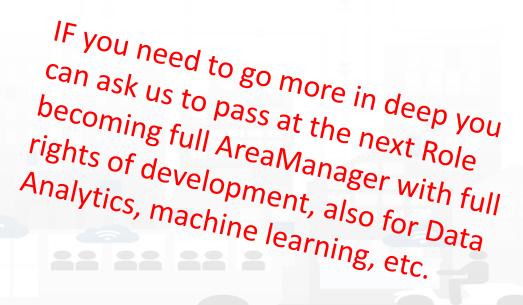









- Developing in the smart city IoT/WoT context
- Smart Solutions **Development Life Cycle**
- Analysis for Innovation (Co-Creation and Co-Working)
- **Design**: Data, Data Models, Data Relationships
- Design & Develop: Data Processes Proc.Logic / IoT App
- Design & Develop of Data Analytics
- **Design & Develop**: user interfaces, visual tools
- Visual Analytic vs Data Analytics: Client Side Business Logic Intelligence
- Design and Control of Smart Applications
- What is missing here and you can get from former course

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CSNAP4INDUSTRY



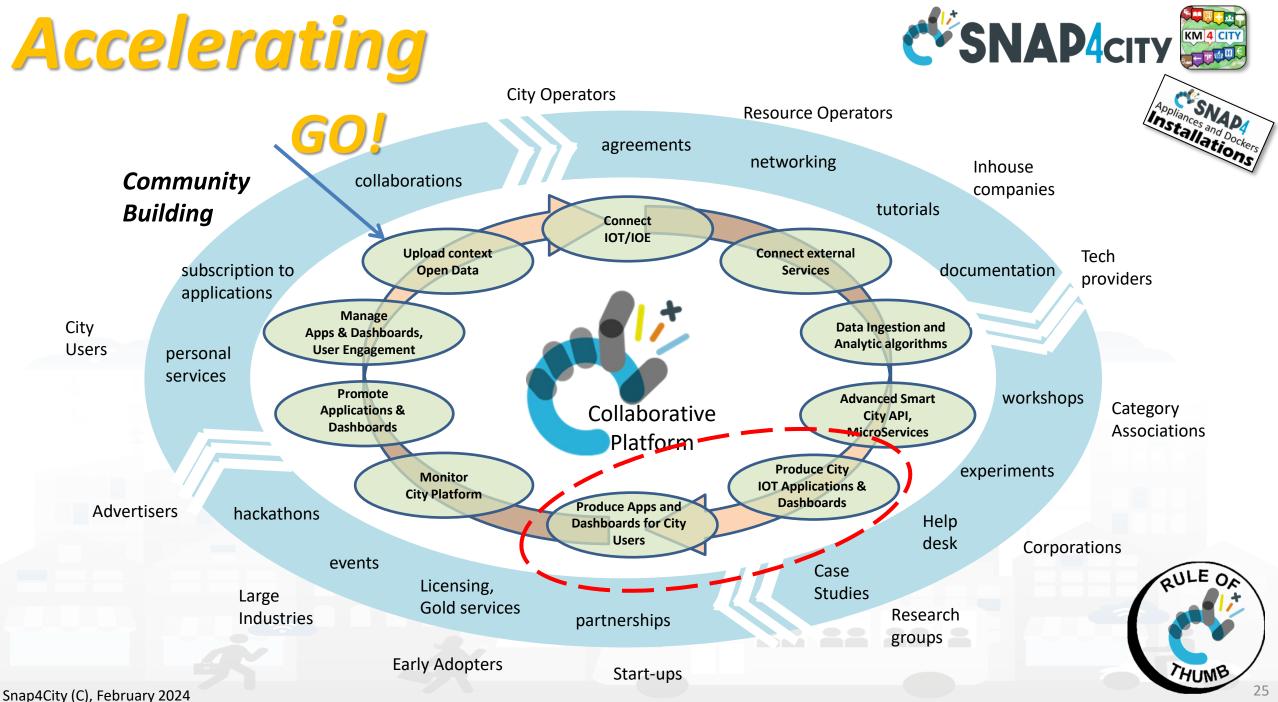

Quadruple Helix process

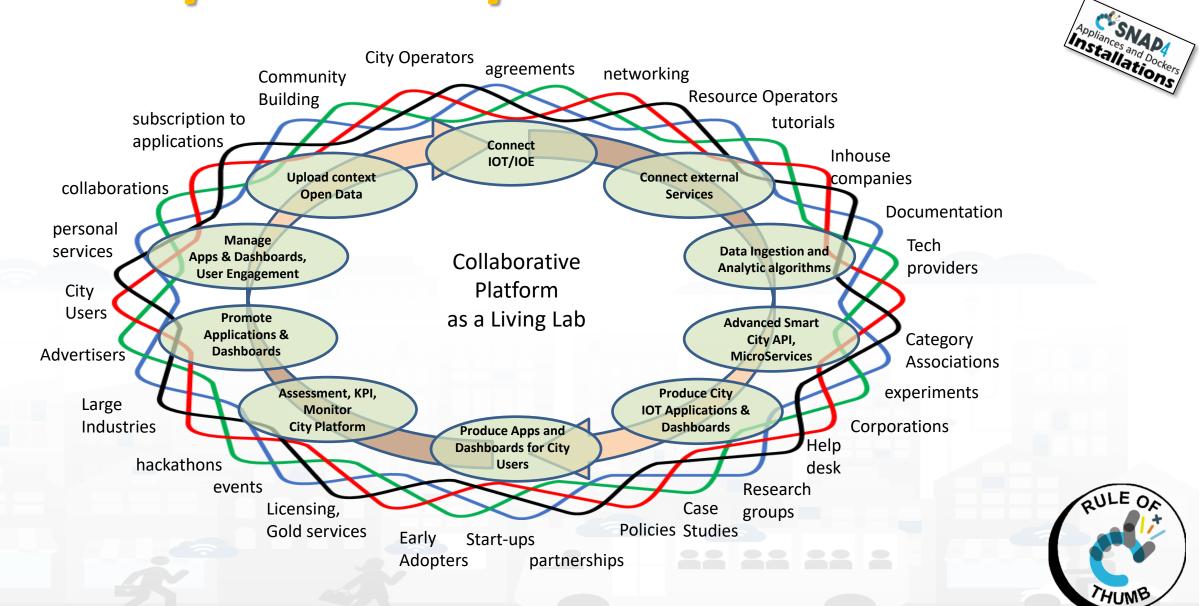









Phases' Coverage

Data Identifica tion g	Data Aggreg. Process.	Data Storage, semantic Data Search Retrieval	Data Analysis	Data Visualizat ion	Visual Analytics
------------------------------	-----------------------------	---	------------------	---------------------------	---------------------

what	Identi ficati on	Gatheri ng	Comple x data types	Aggrega tion	Storage (seman tic)	Efficient Retrieval	Semantic Modeling, query	Data Analytics (micro, marco)	Scenarios context	Artificial Intelligen ce	Data renderin g	Real Time Dashboar d	Event Driven data rendering
GeoServer					(x)						(x)	(x)	
GIS			(x)					(micro)			х		
PowerBl						Х		(x)			х	x	
Tableau					х	х		(x)			х	x	
Snap4City	Х	x	x	x	x	x	x	x	x	х	x	Х	x








Aeroporto Firenze

spucci

Amerigo

etola

- **Controlling Status:** management, and operational
 - Monitoring via KPI
 - Computing predictions data from the field and KPI
 - Anomaly detection
 - Early warning on critical conditions
- Making plan: tactic and strategic, medium and long range
 - Optimisation: Prescriptions, suggestions
 - Risk assessment
 - What-if analysis on scenarios
 - Simulation and predictions
 - Resilience
- **Be ready for Unexpected** Unknows

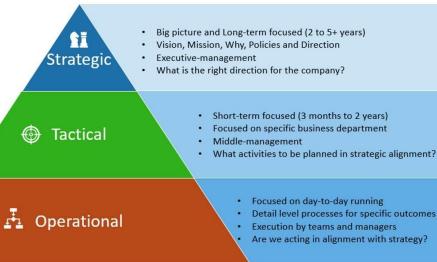














- Controlling Status: management, and operational
 - Monitoring via KPI
 - $\,\circ\,$ Computing predictions vs KPI
 - $\,\circ\,$ Anomaly detection
 - Neuro-Symbolic analysis
 - Risk assessment
 - $\,\circ\,$ Early warning on critical conditions
- Making plan: tactic and strategic, medium and long range, micro/macro
 - Simulation & predictions
 - Generative AI Prescriptions, scenarios
 - Resilience to Unexpected unknows
 - What-if analysis wrt scenarios

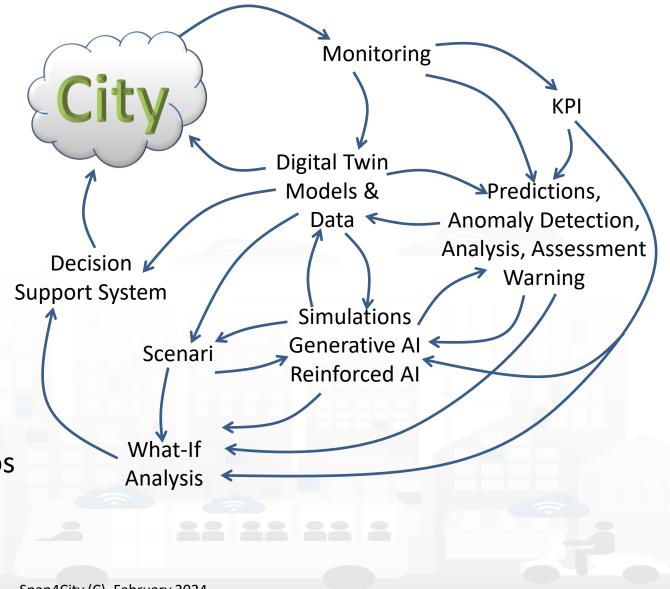


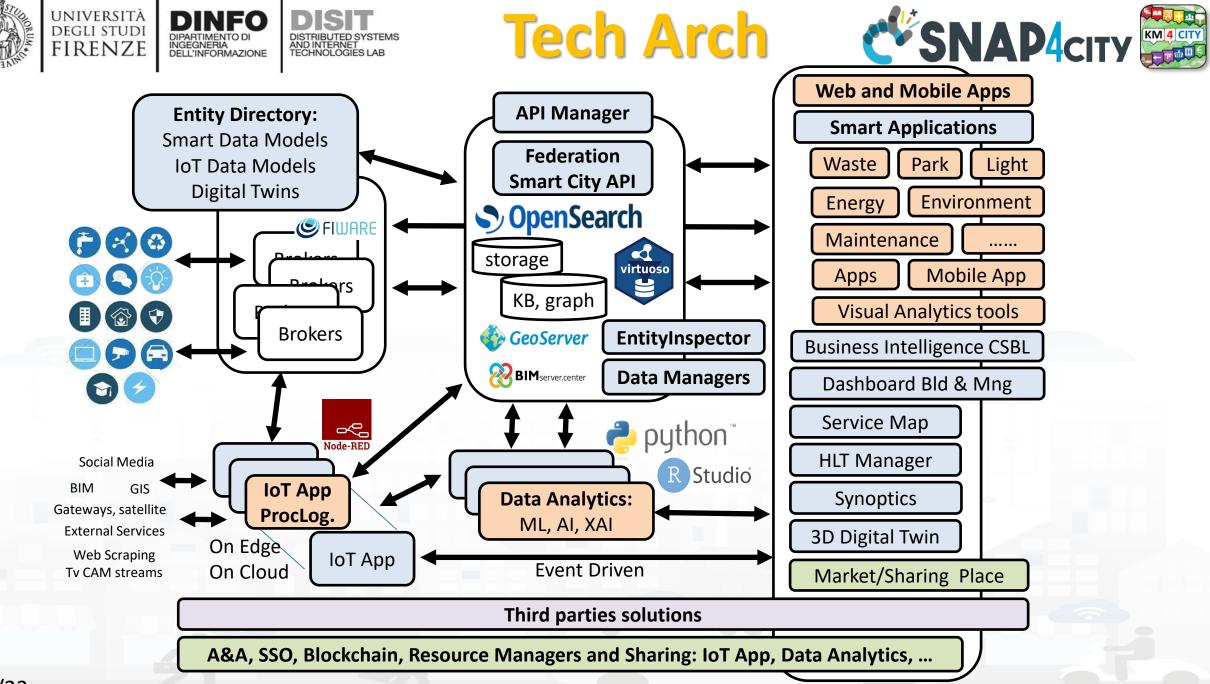

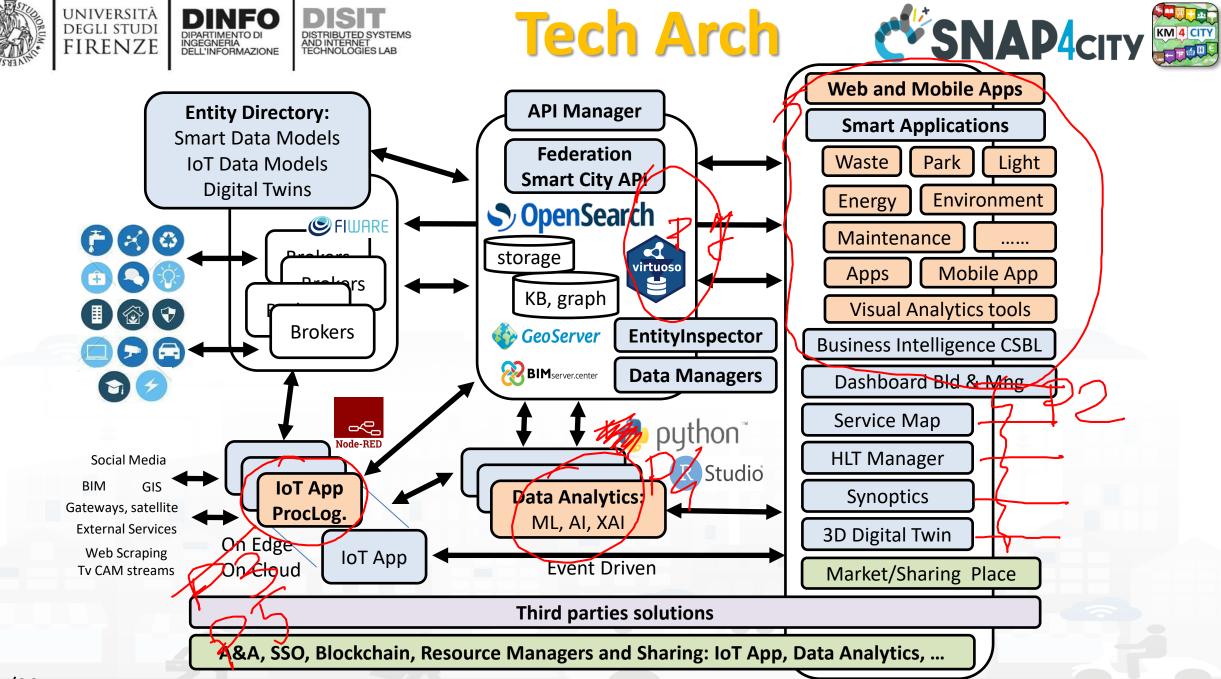


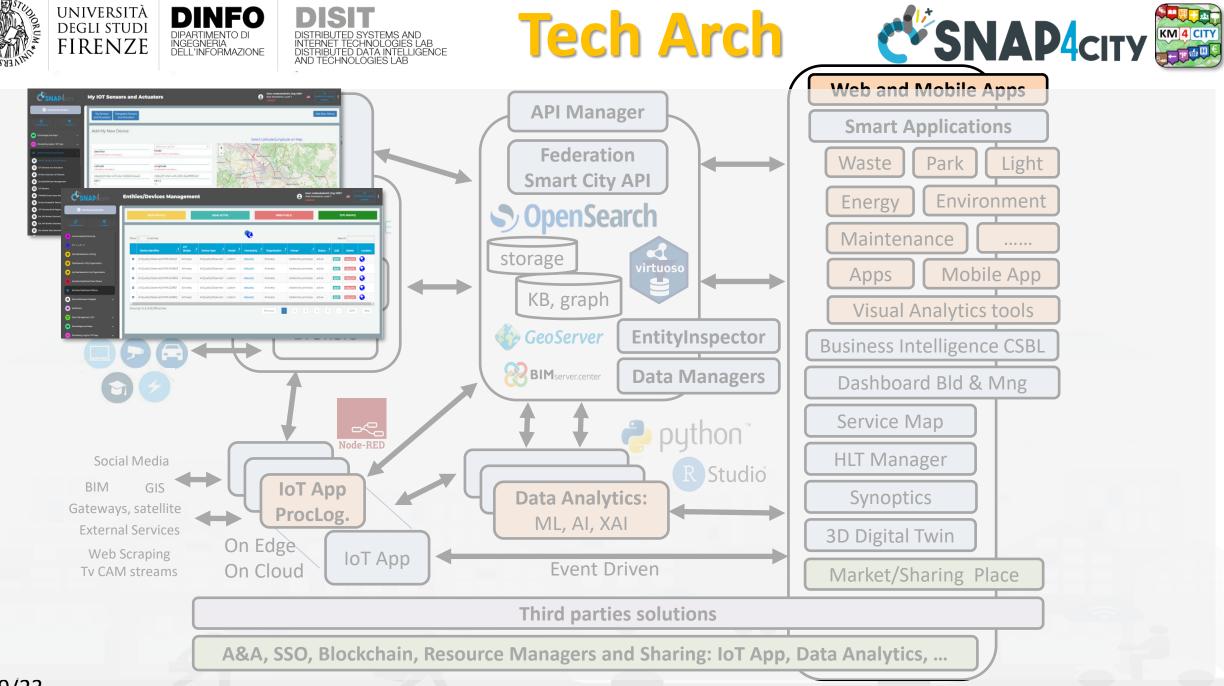


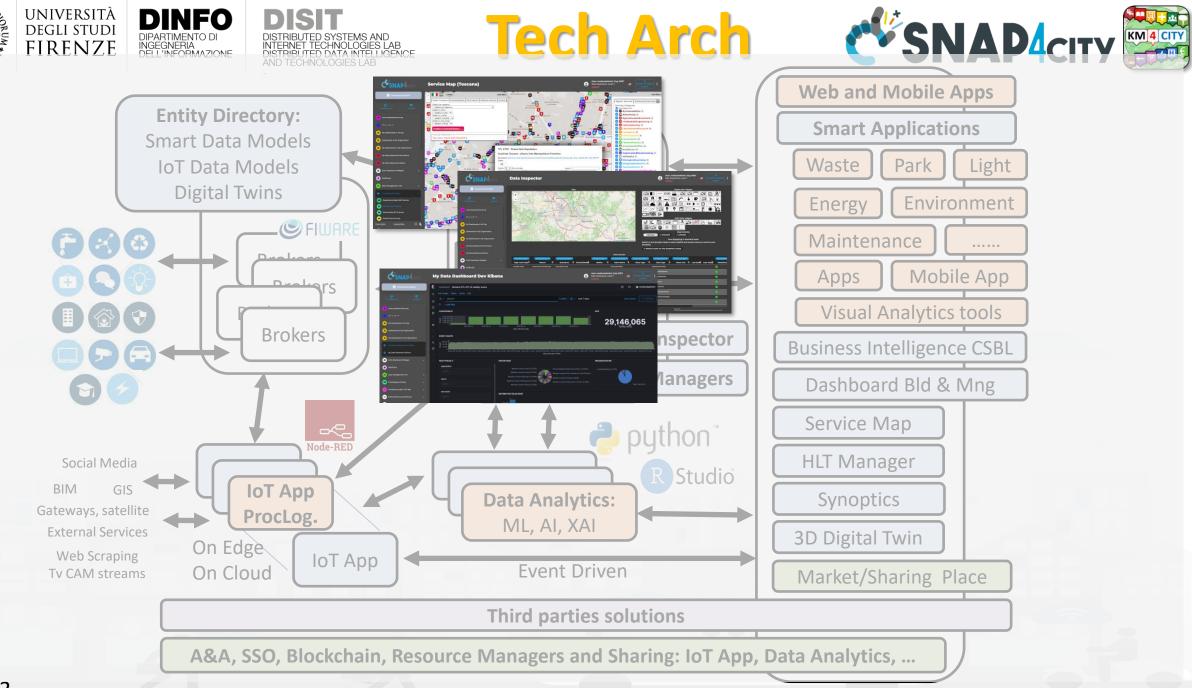

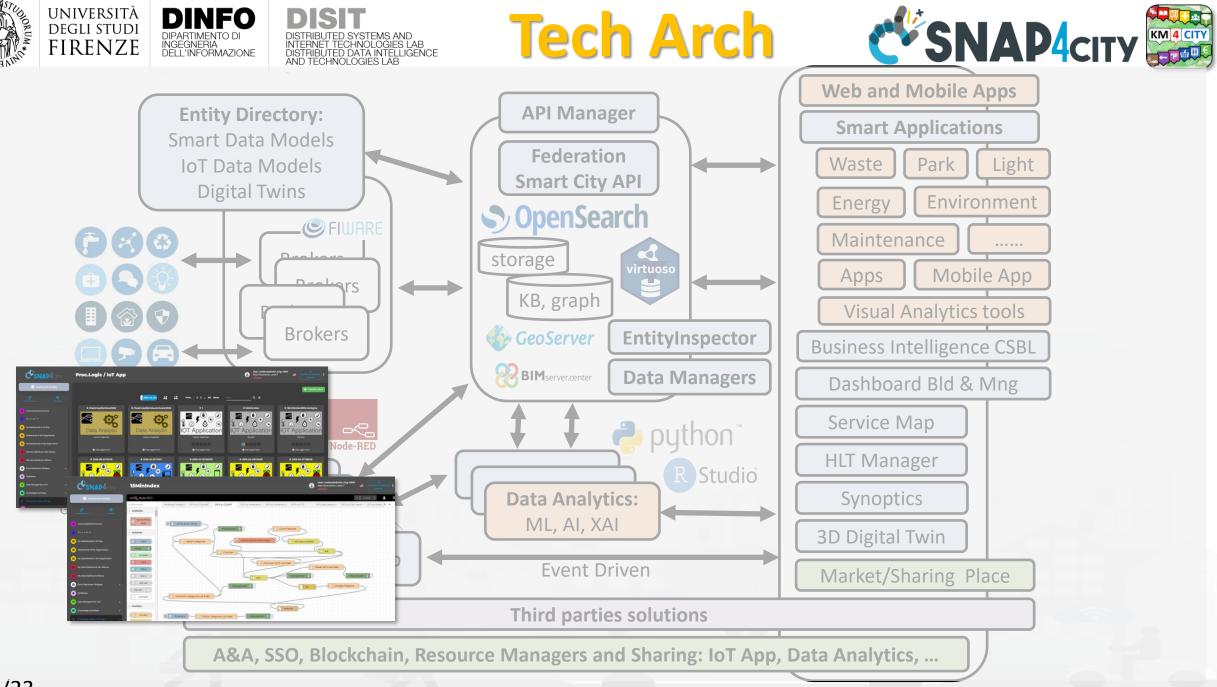

09/23

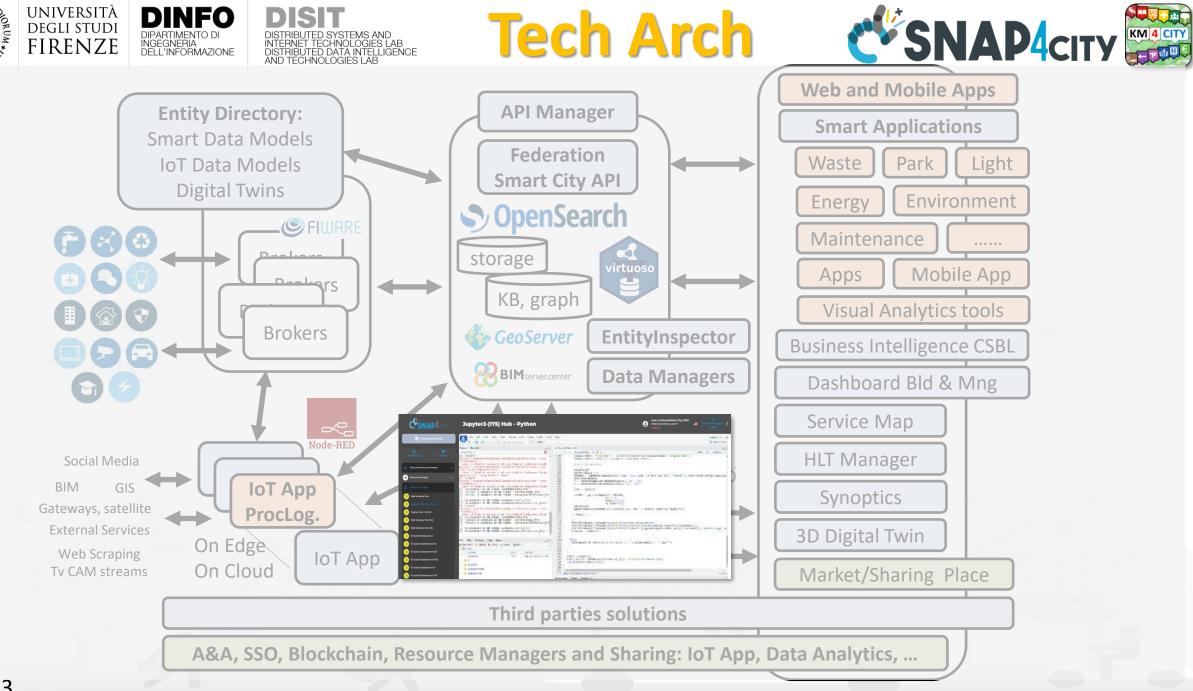

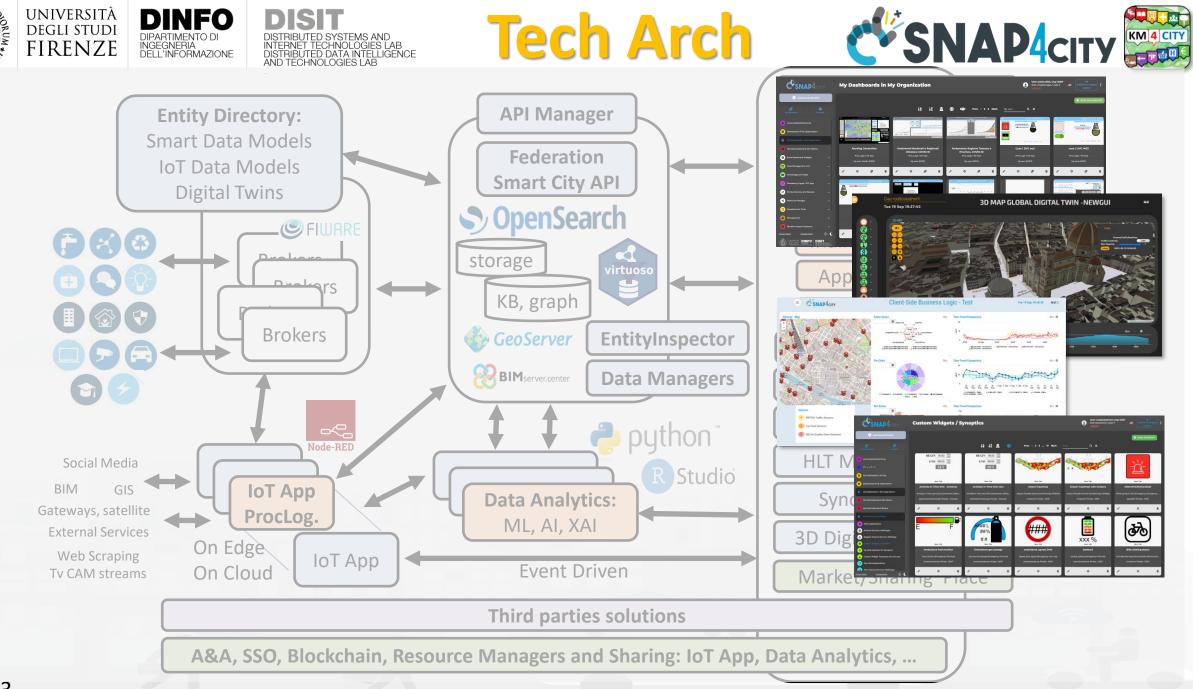





DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB DISTRIBUTED DATA INTELLIGENCE AND TECHNOLOGIES LAB



29,146,065

the distant of manufactures of the

A

C'SNAP4

My Dashboards in My Org





. Tanta fa



A&A, SSO, Blockchain, Resource Managers and Sharing: IoT App, Data Analytics, ...

ISI Prev 1 2 3 Next





inction







- Smart Applications can be easily developed exploiting the cloud infrastructure by producing only:
 - **Processing Logic / IoT App** with almost no coding activities
 - Data Analytics in Python or Rstudio
 - Dashboards with almost no coding activities.
- → Orange parts of the previous figure slide are those usually developed,
 - all the rest, is part of the provided microservices and infrastructure.
- Third party applications can dialog with the solutions via
 - Smart City API, Swagger: <u>https://www.km4city.org/swagger/external/</u> and internal for some...
 - Brokers/IoT Brokers, for example for NGSI Orion Broker: <u>https://www.km4city.org/swagger/external/?urls.primaryName=Orion%20Broker%20K1-K2%20Authentication%20API</u>
 - Processing Logic / IoT App any protocols: https://www.snap4city.org/65 They can also expose some specific API, custom made





Your Applications and IPR in Snap4City

- Data Models: Entity Models / IoT Device Models, Smart Data Models, etc.
- **Proc.Logic / IoT App**: data ingestion, adapter, transformation, wrappers, business logic, transcoding, integration, interoperability, algorithms, etc.
- Data Analytics: algorithm and processing in RStudio or Python, ML, AI, XAI, etc.
- User Interface Design: Dashboards, client-side business logic, Synoptics, widgets, templates, styles, etc.
- Client-Side Business Logics (if any) realized in JavaScript on Dashboard widgets.
- Server-Side Business Logics (if any) realized in Processing Logic as Node-RED and JavaScript.
- and the data instances for the High-Level Types.














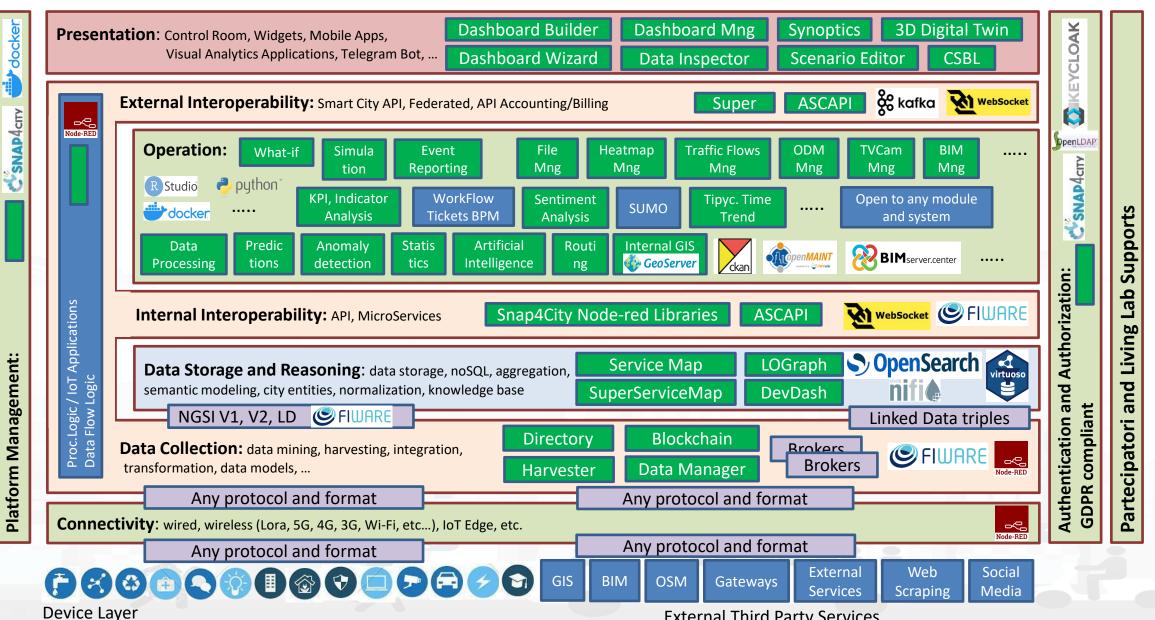

External Third Party Services

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES










QULE OF

THUMB


Development Life Cycle Smart Solutions Agile: CD-CI, Continuos Dev – Continuos Improvement

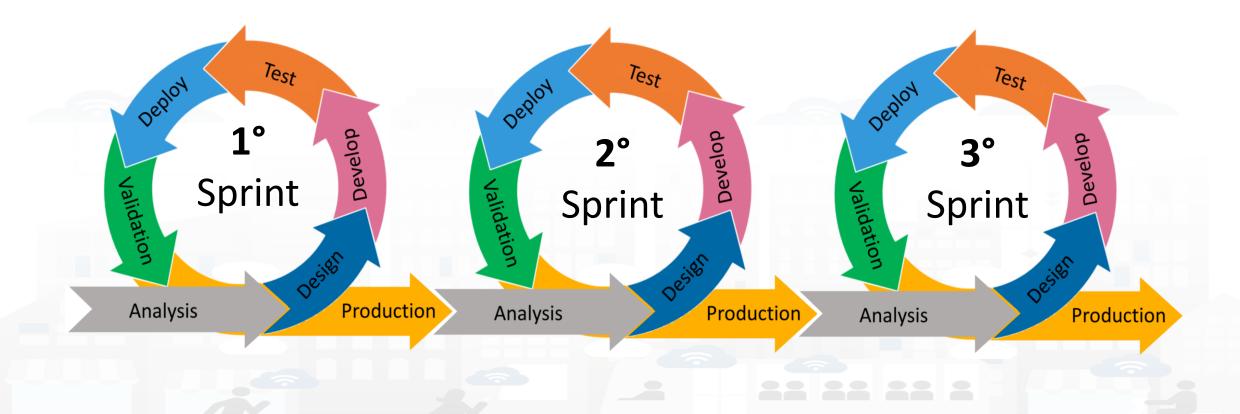






Development Life Cycle Smart Solutions

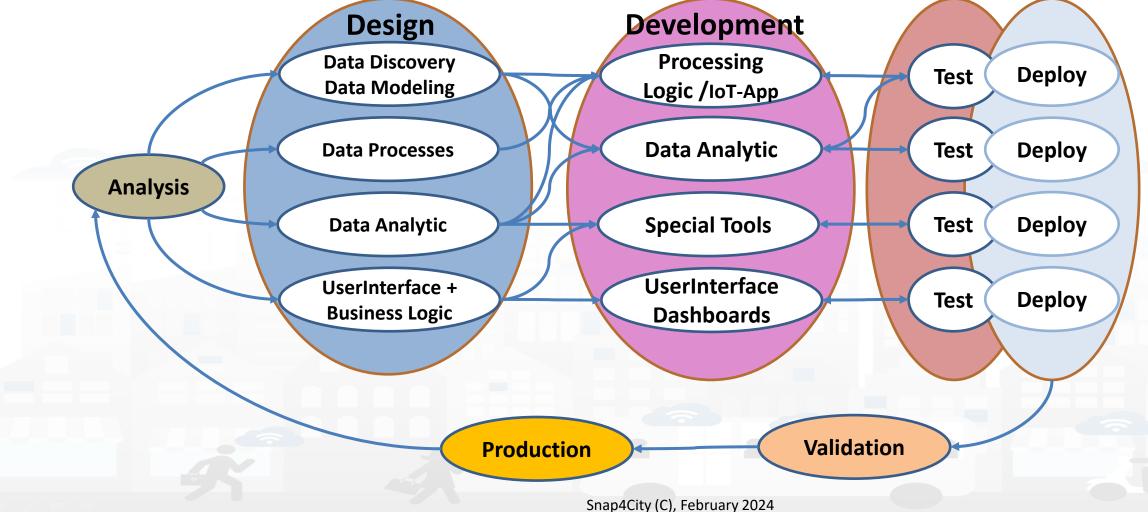

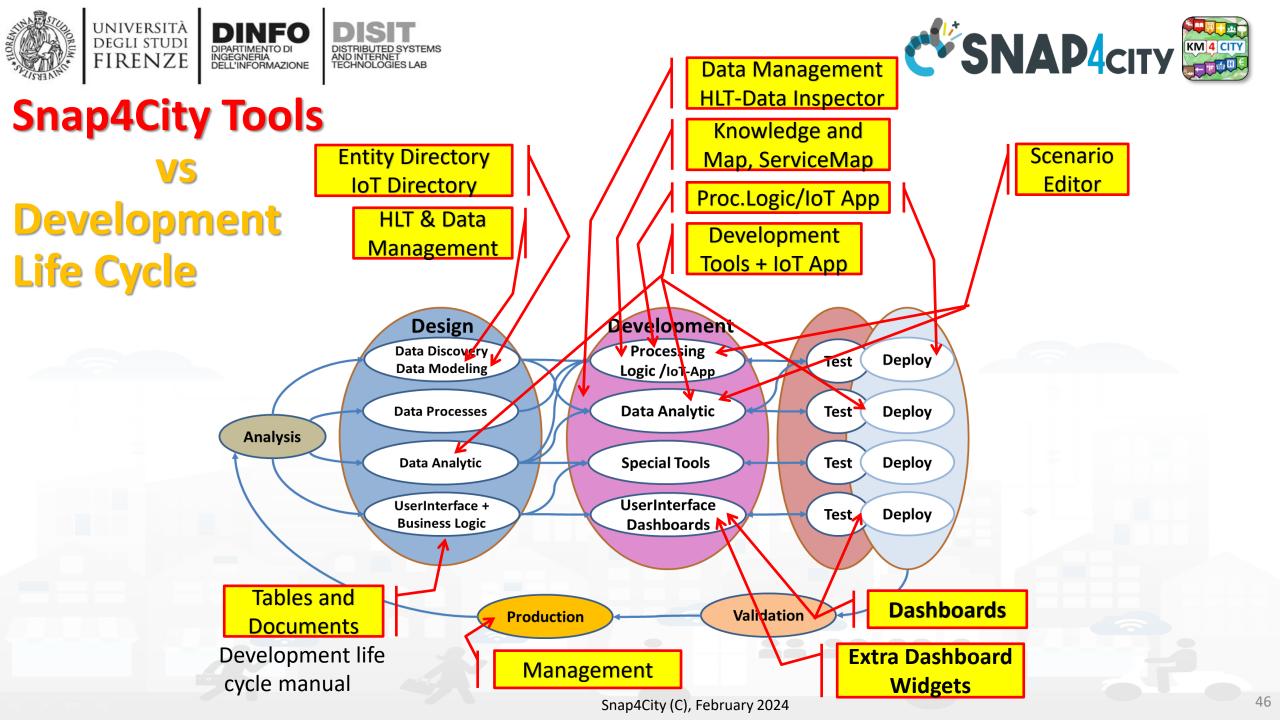





Test & Deploy


- The activities of Test and Deploy are performed into the corresponding tools
 - Processing Logic / IoT App Editor Node-RED provides a button for
 Deploy and a Debug console for testing
 - Data Analytics are
 - tested on development user interface on RStudio and Python
 - Tested on Deploy when they are executed as container from IoT Apps
 - Dashboards are tested directly into the Dashboard editor and preview





Validation and Production


- Is the phase in which all components can be integrated and tested in their integration on the platform ready to be used in production.
- The validation should be performed verifying:
 - Functional Requirements
 - Non functional Requirements
- The **production** process is very easy in Snap4City since implies to provide access to the tools and services to final users you planned.
 - The grant can be performed on Dashboard Management and on IoT Directory, and on Data Management for the data.
- Once put in production the Solution can be monitored in deep on Dashboard usage, on data status, on IoT App, etc. See Part 6 of the training course.

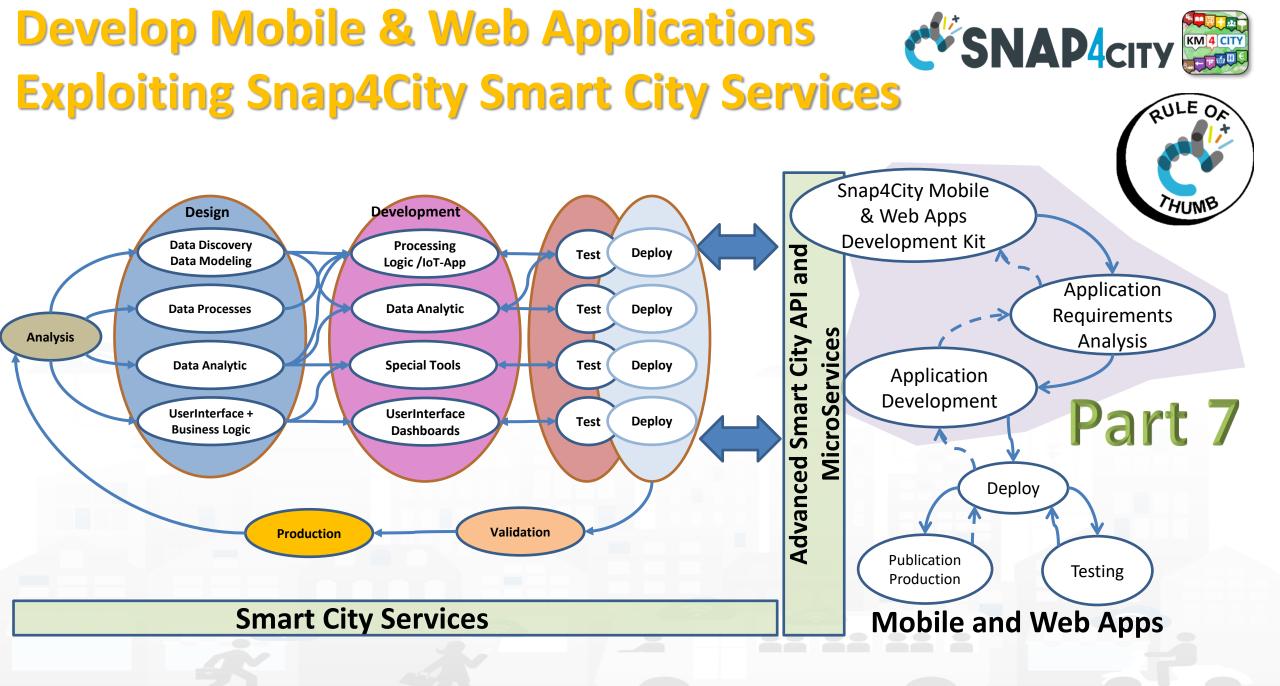

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES





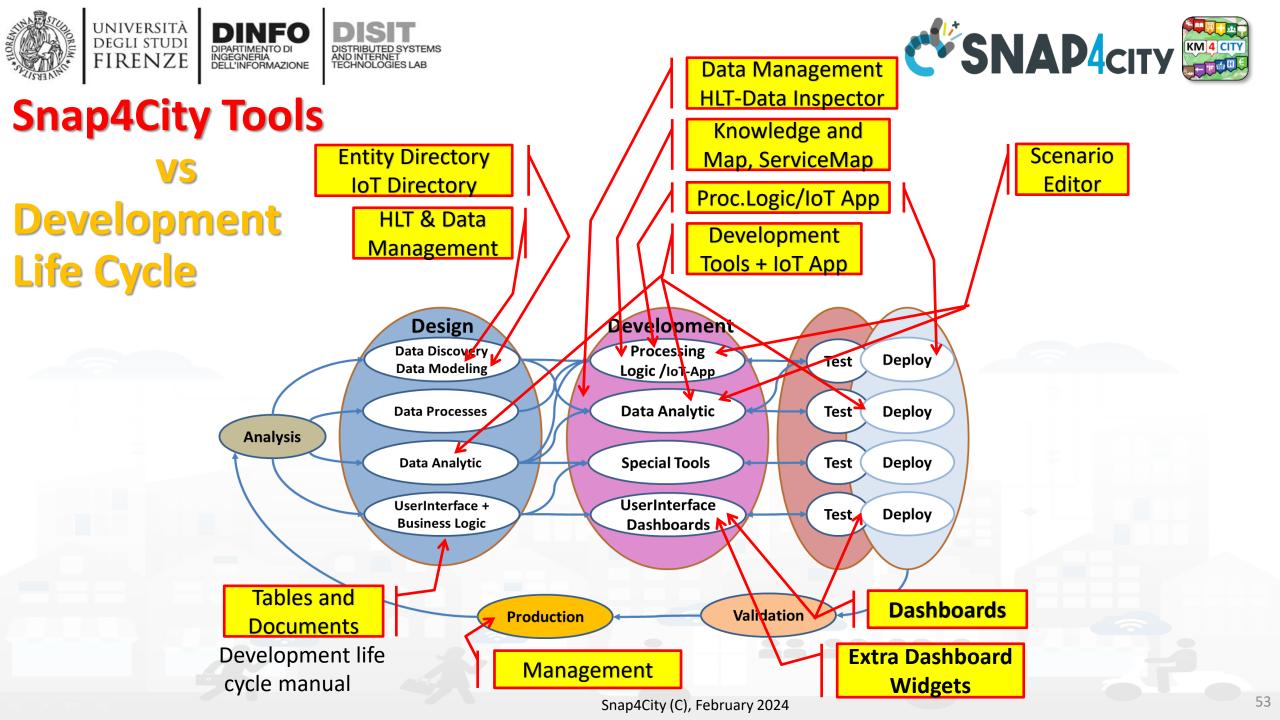





Typical costs to setup operative conditions

Learn Visualization Tools or Libraries: 5-Learn Visualization Tools or **Desing x Scalability: 5-15%** Libraries: 5-15% 15% Software Licenses: 5-15% **Design x Security Considerations: 5-10%** Software Licenses: Development Time: 20-30% 5-15% Infrastructure Costs: 10-20% Maintenance and Data Processing and Storage: 10-20% **Updates: 10-15%** Customization and Interactivity: 10-20% Final Users Training and Support: 5-10% **Development Final User Training Time: 20-30%** Maintenance and Updates: 10-15% and Support: 5-10% Design for Security/privacy: 5-10% Design for Scalability: 5-15% **Customization and** Infrastructure **Data Processing and** Interactivity: 10-20%

Storage: 10-20%

In yellow, what is not impacted

54





Snap4City strongly reduces the effort/costs for

- Learn Visualization Tools or Libraries: 5-15%
 → 10%
 - Visual tools, visual programming, training course, dev. Manuals, etc.
- Software Licenses: 5-15% → 0%
 - Development environment fully open source
- Development Time: 20-30% → 5%
 - Dashboard builder, synoptics, widget exchange, dashboard exchange, clone, delegations, etc.
 - Reused cloned and shared solutions, artefacts
- Customization and Interactivity: 10-20% → 10%
 - Dashboards with Business Logic: CSBL, Node-red SSBL
 - Direct development of Business Intelligence without coding all details
- Design for Security/privacy: $5-10\% \rightarrow$ only respect the guidelines
 - Snap4City is end-to-end secure and GDPR compliant, all is already in place
- Design for Scalability: $5-15\% \rightarrow$ only respect the guidelines
 - Snap4City is scalable from Back-End to Front-End, all is already in place


Reduction of: 45% for development effort of smart city solutions Snap4City (C), February 2024





Model/Technique Development/testing

- Identification of Process goals and Planning (problem definition)
 - Which goals
 - How to compute, which language
 - Which environment, which libraries
- Data Discovery and Ingestion (from the general life cycle)
 - Data Collection, Data Preprocessing if needed
- Data Analysis: feature engineering, feature selection
 - Data ethics assessment
- Data review and preparation for the model, splitting, encoding
- Model Identification and building: ML, AI, etc....
 - Model Training
 - Tuning hyperparameters when possible
- Model Assessment and Selection (Evaluation)
 - Validation in testing
 - Assessment on a set of metrics depending on the goals: global relevant and feature assessment
 - Assessing computational costs
 - Impact Assessment, Ethic Assessment and incidental findings
 - Global and Local Explanation via Explainable AI techniques
- Model Deploy and Final Validation
 - Optimisation of computation cost for features, if needed reiterate
 - Solution on Production (security, scalability, etc.)
- Monitoring and Maintenance on production
- Documentation, incremental documentation

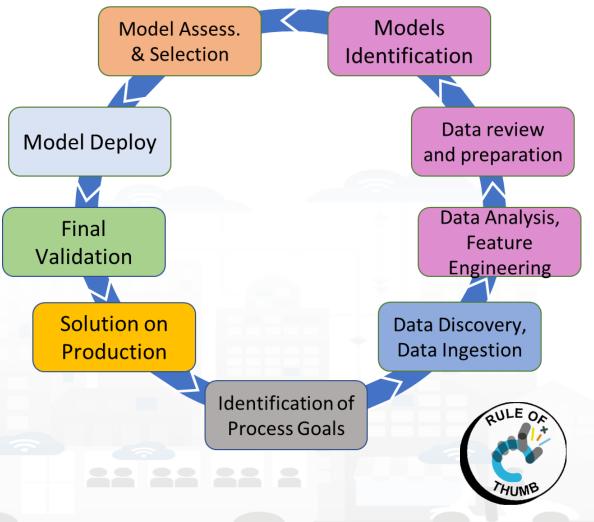






Typical Effort of Phases without Snap4City

- Please note the *effort for Data Preprocessing and Data Collection*
 - 25-35%
- Please note that the pie has not taken into account the effort for creating
 - an actual applications or
 - simple web results rendering on dashboard

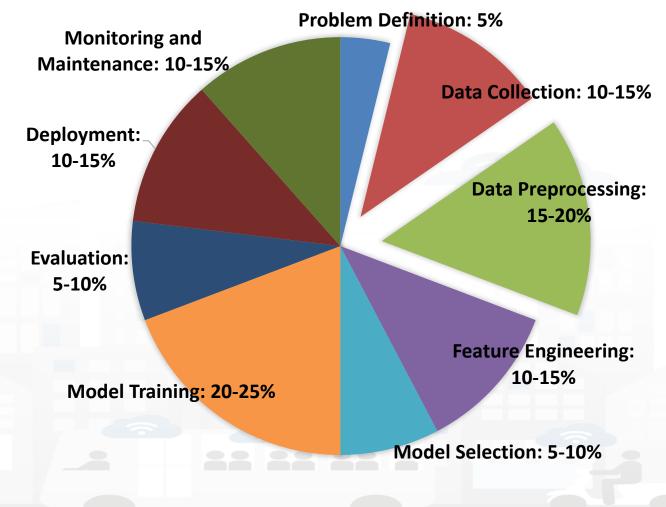





Snap4City on Data Collection and PreProcess

- Effort reduction from 25-35% to 10-15%, >55% reduction of effort for
 - Data Collection via
 - Direct collection access with Brokers, harvesting of external brokers and data models
 - Usage of library of data models, more than 1700 models: saving analysis
 - Custom data models, massive automated construction of entities
 - Automated enrichment of Km4City Ontology and knowledge base: saving time analysis
 - IoT App / Node-red development of data collection processes: fast development

– Data PreProcess via

- Node-red visual programming (node.js) for preprocessing, transcoding, thousands of microservices and libraries, reuse of blocks and data flows, etc.
- Semantic recovering of data relationships via semantic graph DB with Km4City models
- Eventually usage of Python or R-studio or others when needed
- Reuse and share of Node-RED solutions, large number of cases

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES












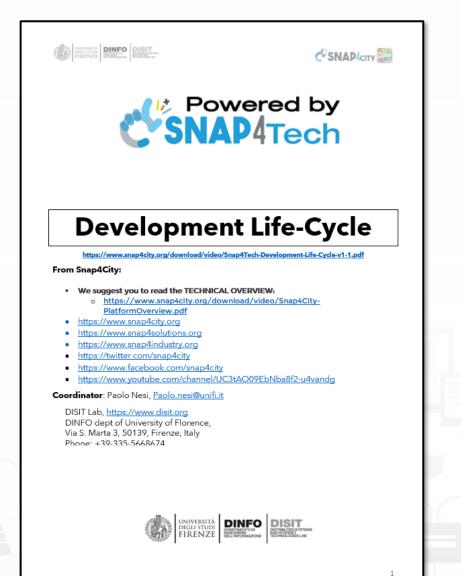

Development https://www.snap4city.org/d ownload/video/Snap4Tech-**Development-Life-Cycle.pdf**








61

Development Life Cycle Smart Solutions

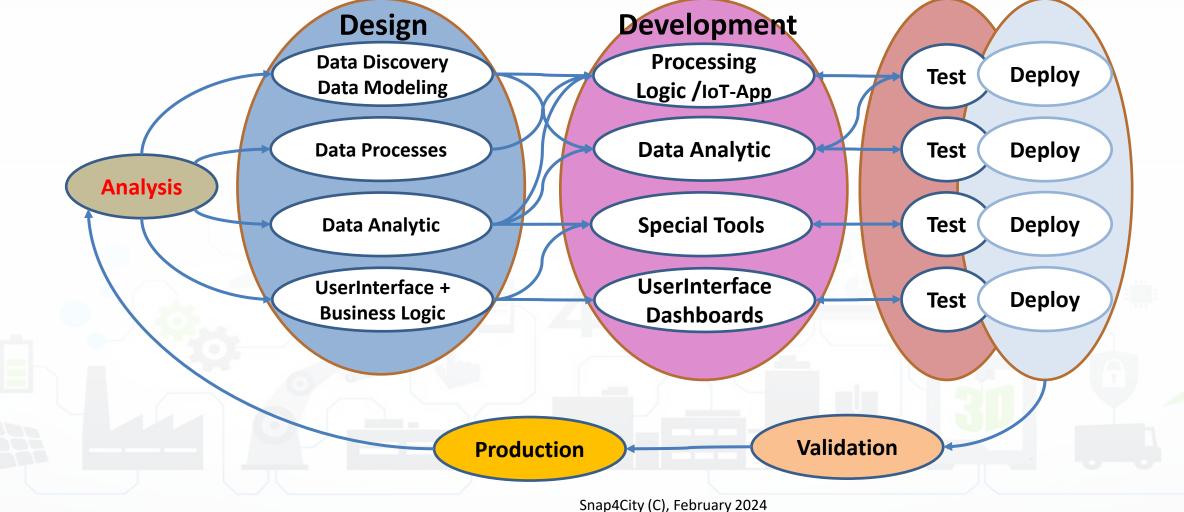








- **Performing workshops:** Innovation Matrix by domain
- Entity Identification: which is the Dictionary
 - Actors and their profiles (as Entity Models, IoT Device Model): User, Operator, final user, ict expert, decision maker, doctors, driver, etc.
 - entities and their digital counterpart (as Entity Models, IoT Device Model) for: Vehicle, Analysis, Server, Client, Mobile App, parking area, etc.
 - Entity Instances / IoT Devices which are instances of the models as: City user XX, Control Room Operator, Doctor Rossi, Cop 3726, Car FI796HG, IoT Device XY, Trip 34, Patient Health Record for Robert, etc.
 - Modules or Tools of Third party or legacy tools: they are applications, servers, IoT Edge subsystems, well known services for data providing, gateway, brokers, etc., which should interact some how with your solutions. They can be on cloud or on some premise, they can provide you some External API, of some kind: WebServer, Rest Call, FTP, Web Socket, MQTT, etc.
 - External API: to interoperate with any other application and service / servers.
 - External Services / Web Pages: to host into the user interface and Dashboards elements coming from third party applications.
 - Tools: which can be actual software or hardware tools, and also data analytics, algorithms, procedures.

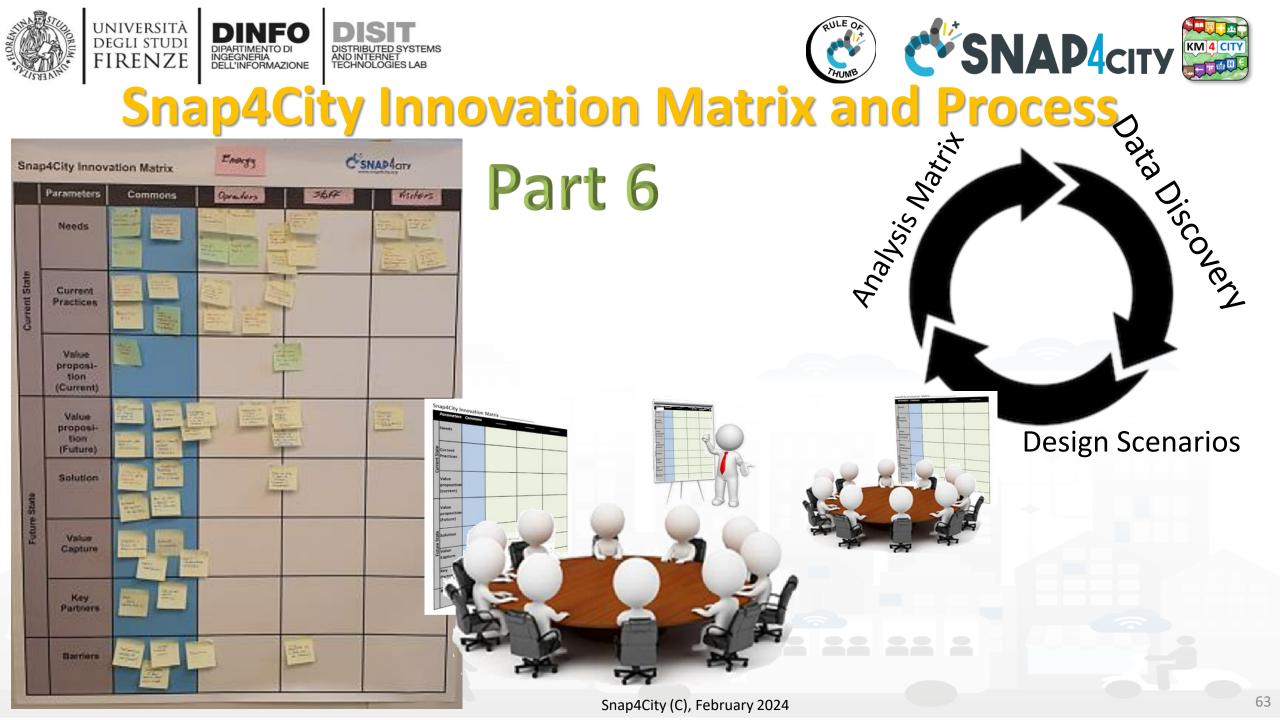





The Dictionary of Entities

Dictionary of Entities							
Term	DataModel or Module	Kind	Responsible	Status	Spec where		
Driver Healthiness Driver Healthiness		Entity Model	Dr. Rick Ross	To be done	To be defined		
User profile A	DriverA	Entity Model					
Vehicle Event	VehicleEvent	Entity Model					
Remote Consolle	emote Consolle MyOperation		J.T. Kirk	To be done	lost		
		ІоТ Арр					
		Dashboards					

Columns in green are expected to be filled in the design phase





• For example: Let us now to suppose that we have to develop a solution for monitoring Vehicles and Drivers. Each Vehicle has a profile description and can be driven by a number of Drivers over time. Each Vehicle can experience some maintenance and performs trips in the city area. A trip has an official start/end and over time is described by its velocity, acceleration, brakes, charging level, or thank level, etc. Each Driver has a profile and can use a number of Vehicles to perform trips. During the trip also the Driver is monitored for its healthiness, attention, etc., and before, during and after the driving, periodically or sporadically may experience some Analysis to certify its capability to drive in that moment and for the next days. The Driver may experience some warning cases for healthiness, some tickets from policeman, some warning for high-speed velocity or generically bad driving, some problems from the vehicle's status, etc.



legenda







DriverAnalysis: user45driveranalysis

- DriverID: http://.../user45
- dateObserved: 25-04-2022T12:00:00
- Status: "bad"
- Location: truck
- Doctor: null
- **Tools: Eyetrack**
-

New update on user45driveranalysis by sending a message

DriverAnalysis: user45driveranalysis

- DriverID: http://.../user45
- dateObserved: 22-03-2022T12:00:00
- by service of the ser Status: "good"
 - Location: room45
 - Doctor: https://....
 - Tools: null

.

Entity Model Register to Entity Messages instantiate with dateObserved

Data Model of the Driver

Name: string

Entity Instance

- Surname: string
- Age: number
- Weight: number
- Phone: string
- **Email: string**
- DriverAnalysisID: **ServiceURI**

.

Register to instantiate

Driver: user45

- Name: David
- Surname: Smith
- Age: 45

.....

- Weight: 78 Kg
- Phone: +49345096103
- Email: david89@gmail.com
- NikName: Carl
- **DriverAnalysis:** http://.../user45driveranalysis


Write SUR**I** to create cross references

DriverAnalysis: user45driveranalysis

- DriverID: http://.../user45 .
- New Color dateObserved: 12-03-2022T12:00:00
- Status: "none" .
- Location: null
- Doctor: null
- **Tools: null**

.....

Snap4City (C), February 2024

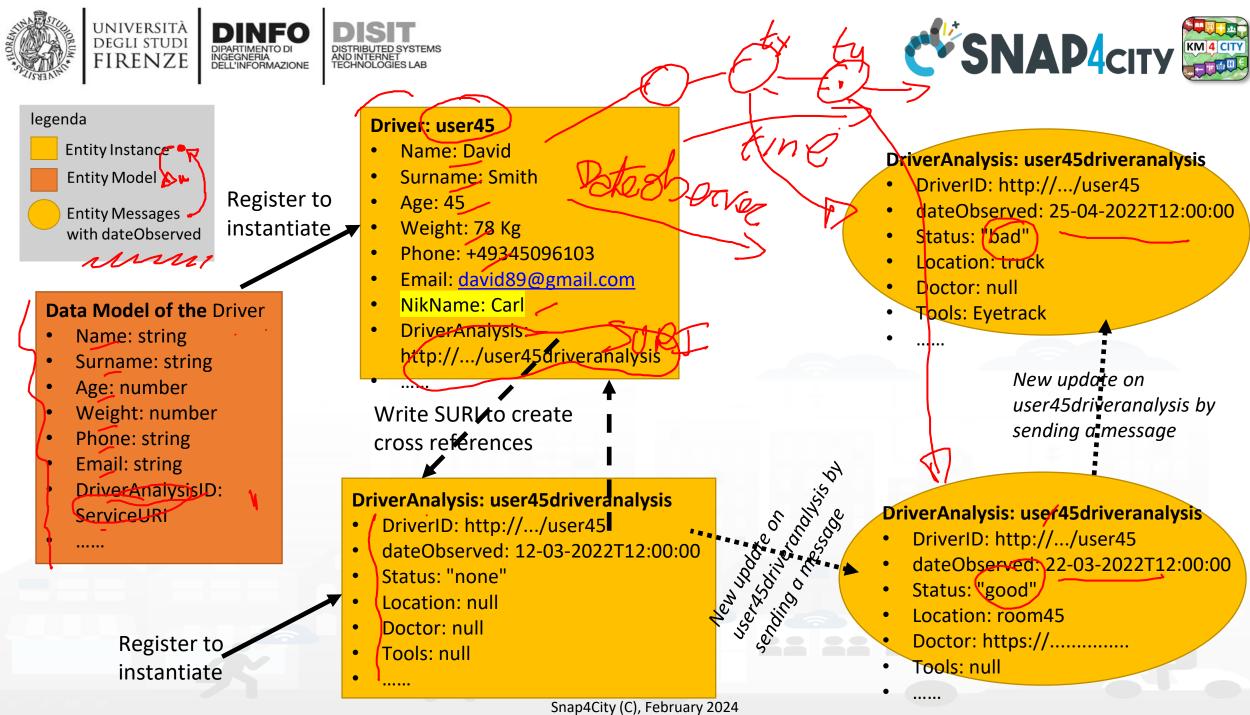





API, External Services

External API							
API	API url and	Kind	parameter	Credentials	status	Description, Swagger link,	
name	shape			approach		Postman,	
	GIS						
	CKAN						

Columns in green are expected to be filled in the design phase

	External Services								
URL Web pages	parameter	Description	Nature	Subnature					

These info can be loaded on Snap4City platform to show them on dashboards easily

Snap4City (C), February 2024








- Scenarios describing the application/task, textual definition, with some standard table as UML. The scenarios have to refer to identified entities.
 - https://www.uml-diagrams.org/activity-diagrams-examples.html
- Use Cases describing the different cases into the single applications, by using UML formalization, there are specific Use Cases for each Scenario. Please focus on the most relevant, those that are adding value to your solutions. The others can be given for granted in a first phase.
- Requirements by using standard tables, using identified Dictionary of Entities, prioritizing them, setting mandatory/preferred/optional, functional and non-functional, first/second/third release, etc.
- Sequence Diagrams: for some of the critical aspects- For example for describing the user interaction, and/or the interaction among major entities, putting in evidence which is the Entity starting the dialogue with respect to the other Entities involved (e.g., a client requesting data to the server, a device sending data to the broker). UML sequence diagrams are a suitable formalization for the purpose.
 - <u>https://en.wikipedia.org/wiki/Sequence_diagram</u>



Example: Activity Diagram


- Continuous Lines can denote event driven, sync communications... for example by sending data on IoT Broker
- Dashed lines can denote Pull data collected periodically.
 Mainly Async. Communication from Platform to Mobile
 Devices
- Coloured Dots are the different devices data storage

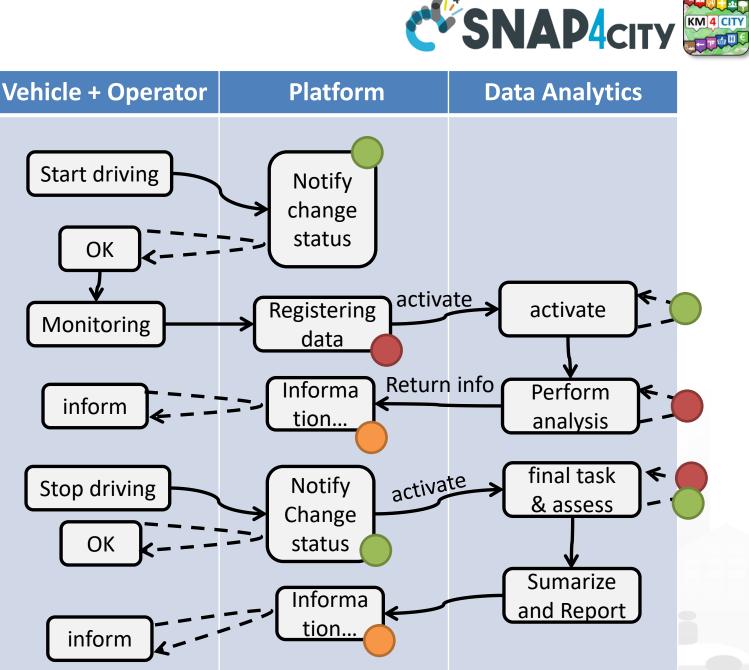

Snap4City (C), February 2024




- Every time a data is entered into the Storage an event occurs into the broker
- The server «Inform» can be subscribed from an IoT App to receive in push these changes (red dashed line)

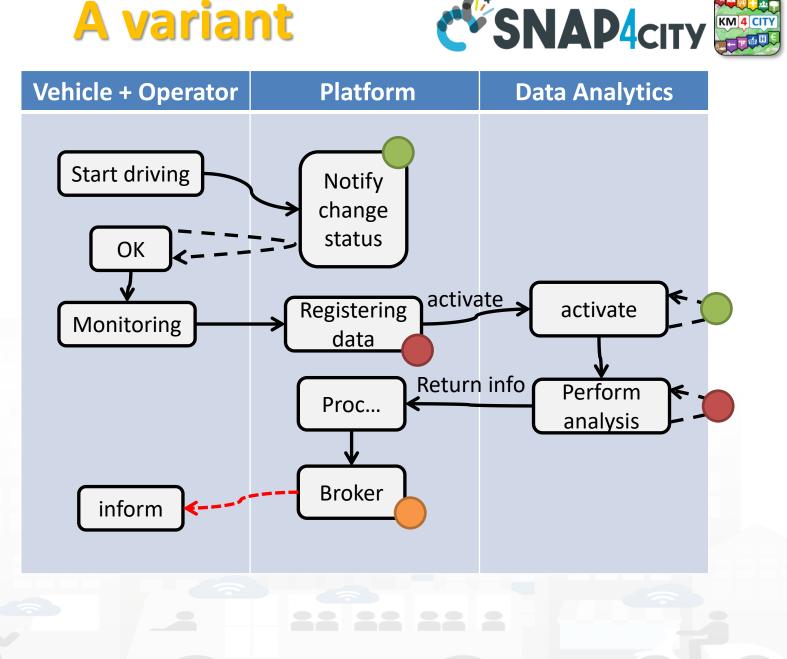



- Every time a data is entered into the Storage an event occurs into the broker
- The server «Inform» can be subscribed from an IoT App to receive in push these changes (red dashed line)

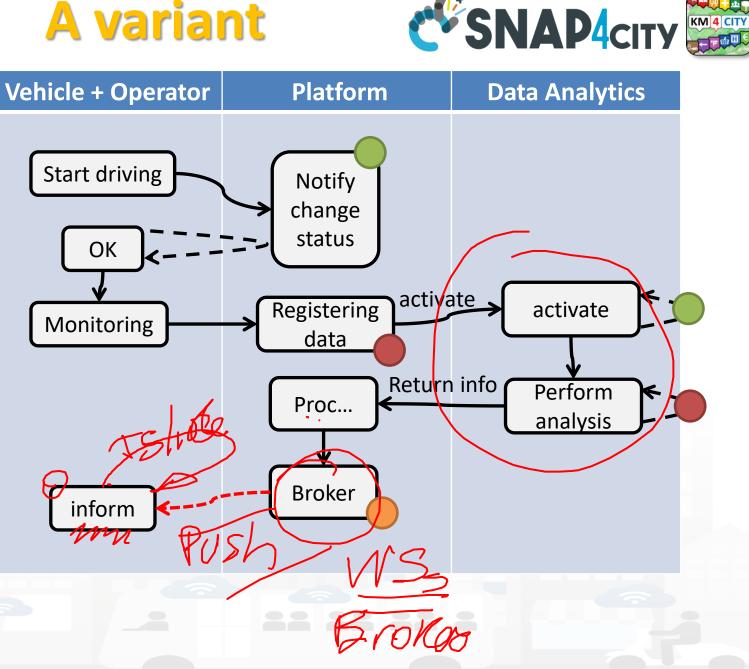





- The driver on its Mobile App, he/she marks the start of the driving section, and the App notifies the change of status to the platform via some broker, once performed all the needed verifications (taking some minutes, may be).
- The effective change and authorization to start is made accessible by the platform to the mobile app which is requesting the status in pull (dashed line).
- Then the mobile app starts to monitor the drive status continuously, and send new data (e.g., the level of attention, the road taken, etc.) to the platform via some broker every minute.
- The arrival of new data may activate some data analytics to perform some analysis of the collected data (red dots) and producing results on the platform data. In the case in which the process detected critical conditions for the driver, the assessment procedure on platform may decide to send an event/message (dashed red, in push from platform to clients) to the operator and driver via a Broker to warning the driving of the lack of attention or for some wrong path.
- The event in push from platform to client could be a viable approach on some platforms and may have some limitation on Mobile App in which the interaction paradigm can be changed in a periodic REST call from the Mobile to the Platform.





Legenda on REST Call 1/2

- the **black continuous line** (push) will be used to send some data on the platform broker with a REST call which has to be Authenticated and Authorized according to the OpenId Connect as explained later, and would be in the form of:
 - <u>https://<platformdomain>:8443/orionbrokerfilter/v1/updateContext</u>
 - Or in the form for non TSL protected interaction:
 - <u>http://iot-app.snap4city.org:80/orion-broker/v1/updateContext?elementid=**ELEMENTID**&k1=**K1**&k2=**K2**</u>
- the **black dashed line** (pull) will be used to request some data from the platform by using a REST call to smart city API (Authenticated and Authorized according to the OpenId Connect as explained later), in the forms:
 - via regular Smart city API by category, etc.
 - <u>http://svealand.snap4city.org/ServiceMap/api/v1/?selection=59.581458578537955;16.71183586120606;59.62875017053684;16.</u>
 <u>875171661376957&categories=Street_light&maxResults=100&format=json</u>
 - Via Super
 - <u>https://www.disit.org/superservicemap/api/v1/</u>?.....
 - Via Super by values
 - o <u>https://www.snap4city.org/superservicemap/api/v1/iot-search/?selection=43.77;11.2&maxDists=700.2&model=CarPark</u>
 - <u>https://www.snap4city.org/superservicemap/api/v1/iot-</u>
 <u>search/?selection=42.014990;10.217347;43.7768;11.2515&model=metrotrafficsensor&valueFilters=vehicleFlow>0.5;vehicleFlow<300</u>





Legenda on REST Call 2/2

- the red dashed line (push) will be used to send some data from the platform (from an Orion broker) to some stable IP client or other machine for machine-to-machine communication
 - As a first step the client has to subscribe to some entity on the Orion Broker passing its IP where the broker will have to send the data in push
 - The POST will be in the form of <u>/v1/subscribeContext passing as parameters</u>: elementid (the device ID, and K1, K2) or TSL approach
 - o
 curl
 -X
 POST
 "https://broker1.snap4city.org:8080/v1/subscribeContext?elementid=mypersonaldatatesterdevice&k1=4e0924a8-fdd6-49cf-8d4a-f49cb5710d8b&k2=240567da-64a4-43b3-8ac9-1265178f3cbe"
 -H
 "accept:

 application/json"
 -H
 "Content-Type:
 application/json"
 -d

 "{\"entities\":[{\"type\":\"Ambiental\",\"isPattern\":false,\"id\":\"mypersonaldatatesterdevice\"}],\"attributes\":[\"temperature\"],\"reference\":\"http://prova/\",\"duration\":\"P1M\",\"notifyConditions\":[{\" type\":\"ONCHANGE\",\"condValues\":\"temperature\"}],\"throttling\":\"PT10S\"}"
 - Then the broker will send the messages to the subscribed client
 - it could be possible to have this kind of push also by using Kafka and/or WebSocket, but this is possible with simple and direct exposed API to all Snap4City platforms.
- The external APIs of Snap4City are documented in Swagger
 - <u>https://www.km4city.org/swagger/external/index.html</u>



	Requirements								
ID	Main Entity / Area	Description	Relevance / Priority	Main Tool-Module / Entity involved	Status	Source Code			
D1	Operator	The Operator has to be authorized to register Drivers	mandatory	OperatorTool	Not developed	JavaScript by xxxx on GitLab			
D2	Driver	The Drive can verify its registration by putting Password to access to its data on the solution	optional	Web and/or Mobile App accessible for the Drivers	accessible as open source	Yes In Java with AGPL licence			
	OperatorTool	Has to provide the list of pending assessment to be done							

Columns in green are expected to be filled in the design phase



Somehow related each other

- Protection, privacy, PENTest, GDPR compliance, ...
- Scalability, performance, efficiency, cloud/edge/container compliance
- Resilience, robustness

FIRFNZF

- Modularity, flexibility, reusability, maintainability, ..
- Portability, Openness, opensource
- Interoperability, standards compliance
- Responsive, usability, ..
- Etc.

All largely covered by Snap4City platform















- Despite the Snap4City platform provides a full range of Non-Functional Requirements
 - You can with your analysis and design produce poor solutions
- For example, it is not a good approach to:
 - Collect user profiles and putting them public
 - Collect data every 10 second of phenomena which change only once a day
 - Couple your web/mobile applications with server-side processes by using synchronous communication in a context which is not synchronous and neither real time





• As a general remark:

Do not worry if at the first sprint of the above steps you forgotten to fill some details. It is quite sure that, you have also provided some details that would have to be revised/changed at the next iteration.

The suggestion is **start developing from the core parts**, which are the production of Entity Instances from the Entity Models, the ingestion of Entity Messages for the Entity Instances, etc., and detailing the most relevant and innovative Use Cases with respect to the state of the art.

They would leverage the smart solutions to a new level, at each sprint.

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES











Development Life Cycle Smart Solutions

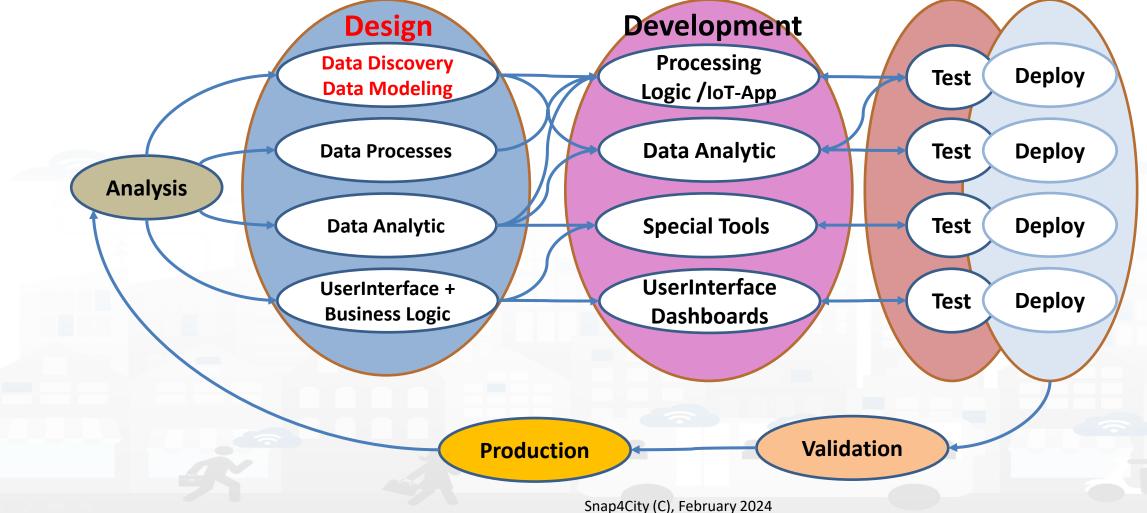






Main Activities of Design

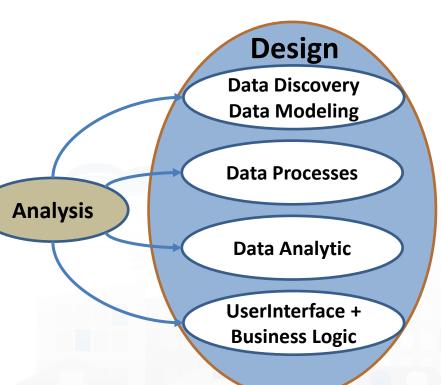

- Data Discovery: Ingestion, gathering, interoperability, discovery, modeling, aggregation, mapping → digital twin modeling
- **Data Processing**: transformation, interoperability; computing Indexes, KPIs and benchmarks, ...
- **Data Analytic**: statistic, predictions, classification, anomaly detection, simulations, optimization, routing, ML, AI, XAI, HPC, ...
- User Interface: dashboards, web pages, business intelligence, visual analytics, what-if analysis, business logic, mobile applications.

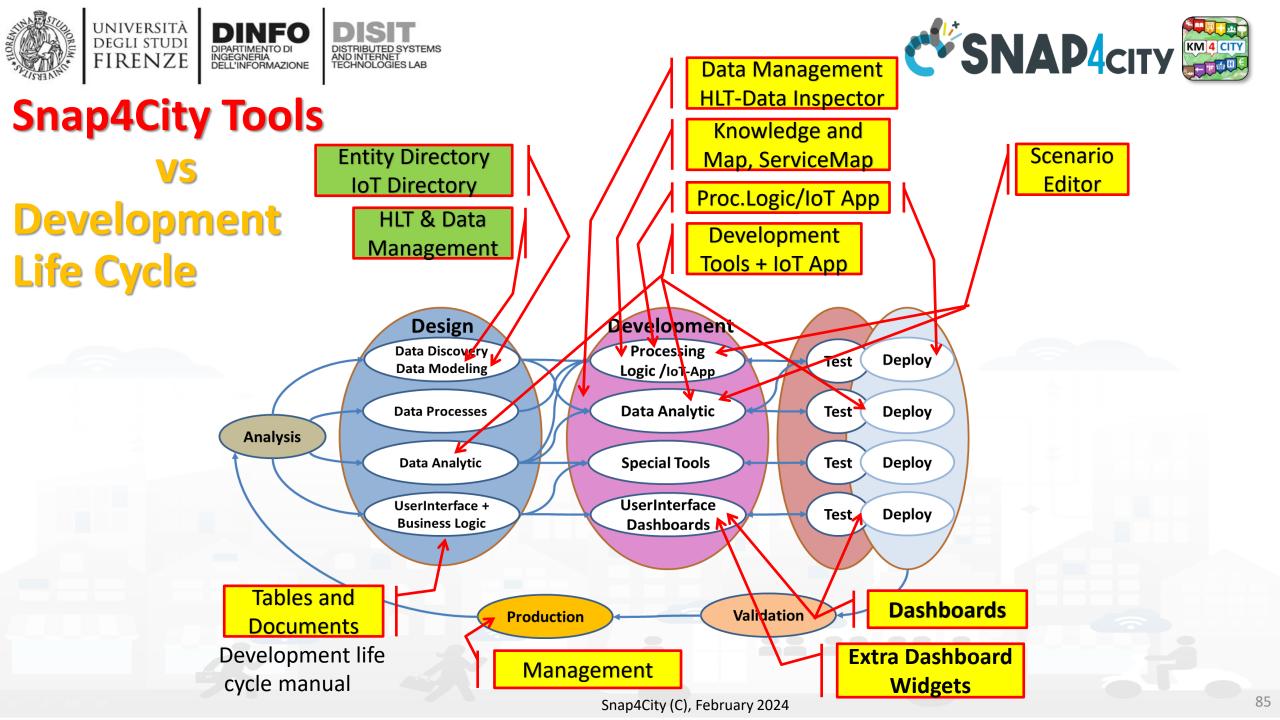





Design: Data Discovery









- Performed by analyzing data from:
 - . identified scenarios from the Snap4City Innovation Matrix
 - II. main organizations, third parties (via interviews)
 - III. other stakeholders (via interview and web pages)
 - IV. regional, national and international sources:
 - I. open data portals, CKAN network, weather sources,
 - II. IOT networks, etc. via web pages and sites
 - V. Mobile Applications (via Snap4City API)
 - VI. Snap4City portal <u>Https://www.snap4city.org</u>
 - VII. Data market.....

VIII. etc.

- Exploiting Snap4City experience, data and tools
- By following the Snap4City guidelines on Data Search on web and world reported in the training course and on Snap4City.org portal.







Data Collection per Domain/Scenario

Description	doma	ain	S/CO/R]	Г	I/O	Туре	Status	Referen t	Provid er	-	Authent ication	HL protocol	protoc ol	HLT	Format	Size	Volum e	Rate	GPS ed	foto	License / Condition of use
Graph road	Energ	y	Static		In	Struct	Understoo d	Name Surname	Stakehol der ID	url	Simple	Push	Datex	Sensor	XML	2 variable s	10Byte	Every 10 minutes	Yes	URL,	Public as CC
Parking	Grapł	l	Real Time		Onf	Non struct	Acquired	Hman	Staff or not staff	Broker	Certificate	Pull	WS	Sens- Actuator		15 fields	1245 Kbyte	Sporadic, max 1000 times per day		IMG	Link to file
Consumption of energy	Mobil	ity	Combined		In/out		Scheduled	Phone	Internal		Etc.		REST	KPI	GeoJSO N			Periodic	Kind		Private
	Trans	port	RT stream				Tested	Etc					I HSTOM	Personal Data	KMZ			2 per day	Insid e msg		Restricted to
			RT Messa	ges			Operative						ODBC	Ext Srv	WFS				Static		Sensible data
			V				Failed						JDBC	IOT	WMS						GDPR aspects
							Not needed							Virtual Sensor	GTFS				*		
														GIS	db						
														Heatmap							
									_					Path, trajectory							
														Trend							
																					OULE ON

Examples are provided per colum.

The resulted raws may have not sense. The status refers to the ingestion process.



Design: Data Modeling

AND INTERNET TECHNOLOGIES LAB

UNIVERSITÀ Degli studi

FIRENZE

TOP

INGEGNERIA DELL'INFORMAZIONE

Part 4 Part 5



High Level Types

Snap4City (C), February 2024


- POI, IOT Devices, shapes,..
 - FIWARE Smart Data Models,
 - IoT Device Models
- GIS, maps, orthomaps, WFS/WMS, GeoTiff, calibrated heatmaps, ...
- Satellite data, ..
- traffic flow, typical trends, ..
- trajectories, events, Workflow, ..
- 3D Models, BIM, Digital Twins, ..
- OD Matrices of several kinds, ..
- Dynamic icons/pins, ..
- Synoptics, animations, ..
- KPI, personal KPI,..
- social media data, TV Stream,
- routing, multimodal, constraints, ...

IRENZE

• decision scenarios,

etc.

10/22

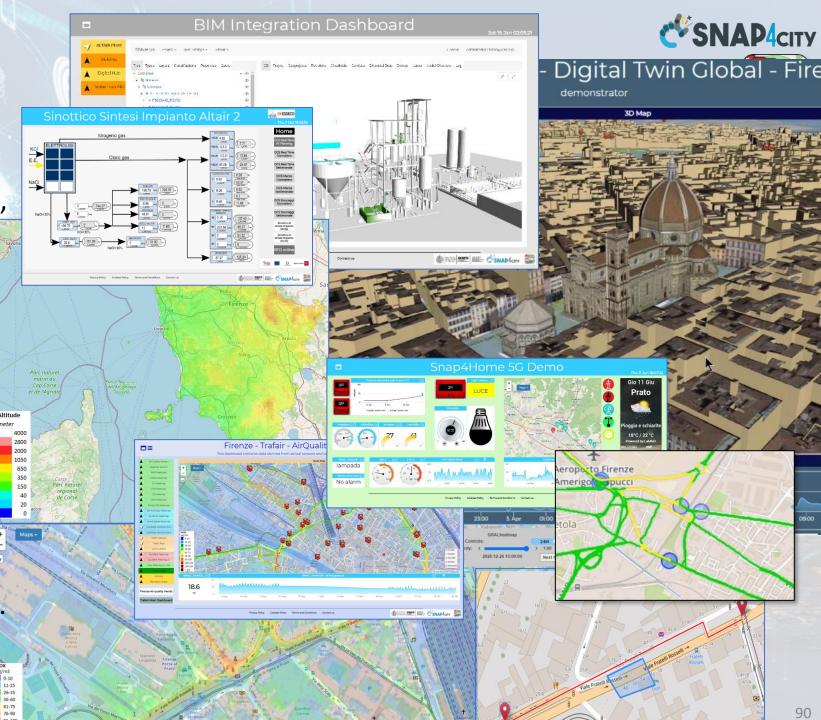

Standards and Interoperability (6/2023)

Compliant with:

- IoT: NGSI V2/LD, LoRa, LoRaWan, MQTT, AMQP, COAP, OneM2M, TheThingsNetwork, SigFOX, Libelium, IBIMET/IBE, Enocean, Zigbee, DALI, ISEMC, Alexa, Sonoff, HUE Philips, Tplink, BACnet, TALQ, Protocol Buffer, KNX, OBD2, Proximus, ..
- IoT model: FIWARE Smart Data Model, Snap4City IoT Device Models
- General: HTTP, HTTPS, TLS, Rest Call, SNMP, TCP, UDP, SOAP, WSDL, FTP, FTPS, WebSocket, WebSocket Secure, GML, WFS, WMS, RTSP, ONVIF, AXIS TVCam, CISCO Meraki, OSM, Copernicus, The Weather Channel, Open Weather, OLAP, VMS Milestone,
- Formats: JSON, GeoJSON, XML, CSV, GeoTIFF, OWL, WKT, KML, SHP, db, XLS, XLSX, TXT, HTML, CSS, SVG, IFC, XPDL, OSM, Enfuser FMI, Lidar, gITF, GLB, DTM, GDAL, Satellite, D3 JSON, ...
- Database: Open Search, MySQL, Mongo, HBASE, SOLR, SPARQL, ODBC, JDBC, Elastic Search, Phoenix, PostGres, MS Azure, ..
- Industry: OPC/OPC-UA, OLAP, ModBUS, RS485, RS232,..
- Mobility: DATEX, GTFS, Transmodel, ETSI, NeTEx, ..
- Social:Twitter, FaceBook, Telegram, ..
- Events: SMS, EMAIL, CAP, RSS Feed, ..
- **OS**: Linux, Windows, Android, Raspberry Pi, Local File System, AXIS, ESP32, etc.








https://www.snap4city.org/65

Parts 3, 5 **SNAP4**city AND INTERNET



What About Entity Instances / IoT Devices, Time Series

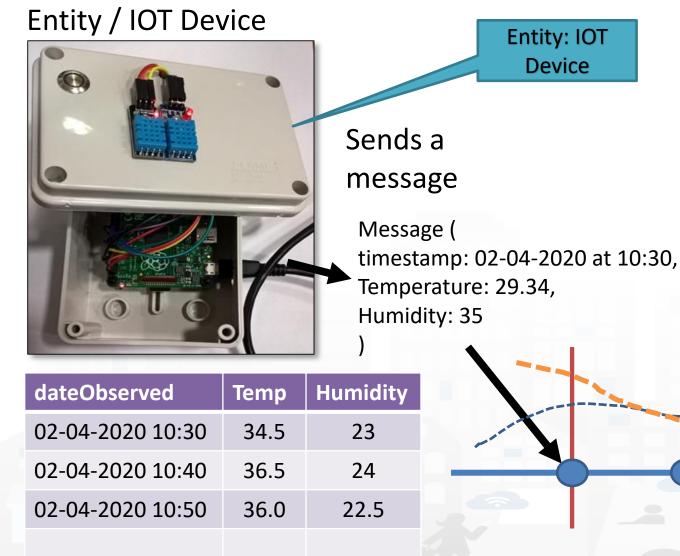

INGEGNERIA DEL L'INFORMAZIONE

UNIVERSITÀ

DEGLI STUDI

FIRENZE

- A set of data coming from an Entity Instance / IoT Device with multiple sensor become a time series of values for devices.
 - For example: taking a new measure every 10 minutes (Red Lines)
 - Non regular rates can be valid data as well.
- Each new measure in Snap4City is conventionally time located in «dateObserved», which has to be Unique.
 - Only one message per dateObserved is allowed

TIME








Time Series: they are data streams

- As soon as you have registered an Entity Instance / IoT Device
 - You are ready to get Future data, may be arriving in PUSH
 - Recall and store historical data as well, but they have to be
 - recalled in PULL with some IoT App.
 - Loaded in PULL with some File or Data Table Loader

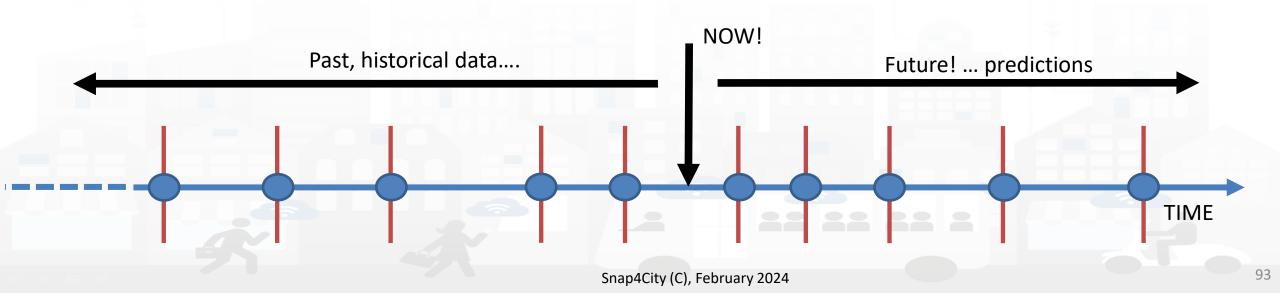




HLT: Unified Classification for Data and Services

università degli studi FIRENZE

INGEGNERIA DELL'INFORMAZIONE DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB

IoT Device Variable, Sensor Device High-Level Type IoT Device Variable	All selected (15) Nature IoTDevice	All selected (48) ▼ Subnature IoTSensor IoTSensor IoTSensor IoTSensor IoTSensor IoTSensor IoTSensor IoTSensor	Device/Model devicetest1 devicetest1 MyThermometer_001 MyThermometer_001 adminTest1 adminTest1 newmarcodev1 newmarcodev1 Selected	All selected (27) Broker orionUNIFI	All selected (1499) Value Name temperature humidity temperature humidity temperature humidity temperature humidity	All selected (159) Value Type temperature humidity temperature humidity temperature humidity temperature humidity temperature humidity temperature humidity	All selected (15) Data Type float float	All selected (63) ▼ Value Unit °C # °C # °C 6 % °C % °C %	Last Date 🔶 2018-05-31 19:16:05 2018-05-31 19:16:05	Last Value	All selected (2) Healthiness	Last Check ♦ 2021-10-15 10:01:02 2021-10-15 10:01:02 2021-10-15 10:01:01 2021-10-15 10:01:00 2021-10-15 10:01:00 2021-10-15 10:00:59 2021-10-15 10:00:59	All selected (2) Ownership private (My Own) private (My Own) private (My Own) private (My Own) private (My Own) private private private private
Level Types	Semai	SubNature	Dev/Model name	Broker name	Value Name	Value Type	Data Type	Value Unit	Last Date/Time	Last Value	Healthiness	Last Check	Commership Organization
High	Classif		Techn Sourc			ables 04City (C), Febr		nes	Ke Ti	al me	Sto	itus	For Admir 94



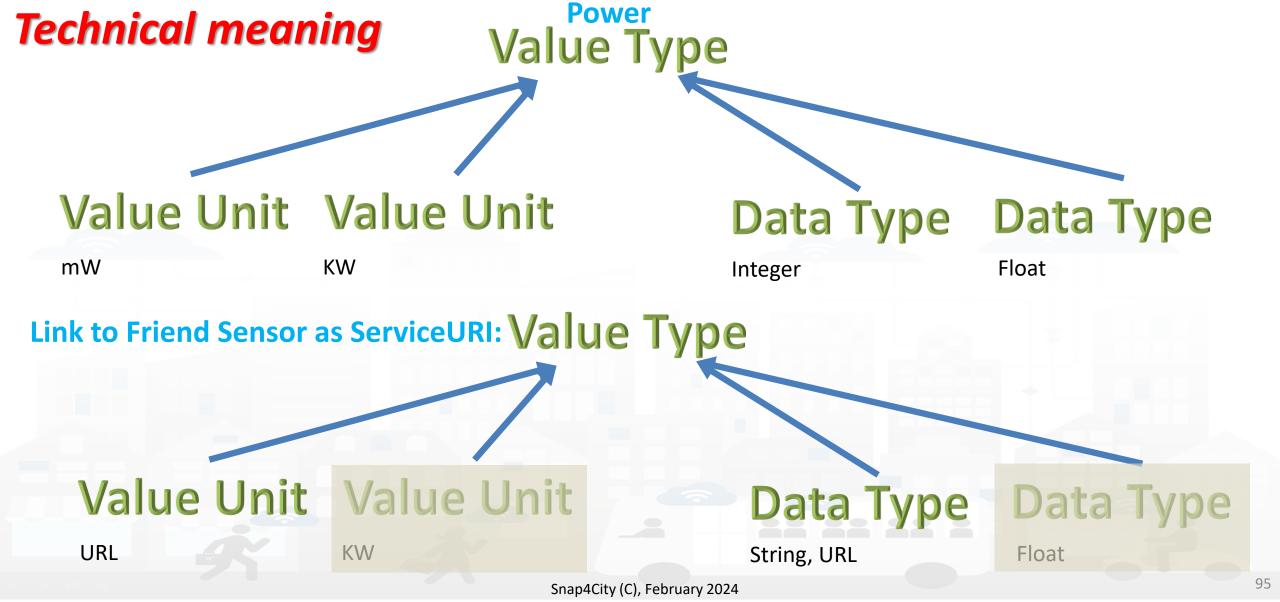





Example of Energy and its Value Units

		Dictionary	y Editor for Data Fields					
+ Inser	rt new Dictionary ele	ment						
Show 10 🗸					Search:			
Value Name	Dictionary Type	Description	Data Types	Parent Value Name	Child Value Name	Controls		
Boats_and_shi	subnature	Boats And Ships Rental		TransferServiceAndRenti		EDIT DELETE		
Bollard	subnature	Bollard		TransferServiceAndRenti		EDIT DELETE		
Bookshop	subnature	Bookshop		ShoppingAndService		EDIT DELETE		
bool	value unit	boolean		dali_com_error, dali_dim		EDIT DELETE		
Botanical_and	subnature	Botanical & Zoolog. Gardens		CulturalActivity		EDIT DELETE		
Boxoffice	subnature	Boxoffice		Entertainment		EDIT DELETE		
bpm	value unit	Beat per minute		average_heart_rate, avera		EDIT DELETE		
brightness_flag	value type	Brightness Flag	string		#	EDIT DELETE		
broken_bikes	value type	Broken Bikes	integer		#	EDIT DELETE		
Building_and	subnature	Build. & Indust. Clean. Activ.		Environment		EDIT DELETE		
First << Prev 1.	.9101189 Next >> L		Value U	nits:				
		Value Type: Energy	- Watt	per hour				
		value type. Ellergy			ur -			
	Filter b Show 10 > Value Name Boats_and_shi Bollard Bookshop bool bool Botanical_and Boxoffice bpm brightness_flag broken_bikes Building_and	Filter bictionary type bictionary type bictionary type Show IO C Dictionary Type Value Name Dictionary Type Boats_and_shi subnature Boats_and_shi subnature Bollard subnature Boolshop subnature bool value unit Botanical_and. subnature bpm value unit broken_bikes value type broken_bikes subnature	Insert new Dictionary element Filter by Dictionary type > Show 10 > Value Name Dictionary Type Description Boats_and_shi subnature Boats And Ships Rental Boats_and_shi subnature Bollard Bollard subnature Bollard Bools And Ships Rental Bools And Ships Rental Boolshop subnature Boolshop Bollard subnature Boolshop Boolshop subnature Boolean Botanical_and subnature Botanical & Zoolog. Cardens Boxoffice subnature Boxoffice bond value unit Beat per minute borghtness_flag value type Brightness Flag broken_bikes value type Broken Bikes	Insert rew Dictionary type Store IC Value Name Dationary type Solaran Description Data Types Solaran Description Bolaran Bolaran Bolaran Bolaran <t< th=""><th>Fitter by Dictionary type or excription Data Types Parent Value Name Solar O subnature Boats And Ships Rental IransferServiceAndRentL Boaiand subnature Boaiand Gooden IransferServiceAndRentL Bookshop subnature Bookshop ShoopingAndService Bookshop subnature Bookshop IransferServiceAndRentL Bookshop</th><th>Instant betrebender</th></t<>	Fitter by Dictionary type or excription Data Types Parent Value Name Solar O subnature Boats And Ships Rental IransferServiceAndRentL Boaiand subnature Boaiand Gooden IransferServiceAndRentL Bookshop subnature Bookshop ShoopingAndService Bookshop subnature Bookshop IransferServiceAndRentL Bookshop	Instant betrebender		

- Processes in Execution
- Process execution Archive
- Dictionary Editor for Data Fields
- Doc: Resource Manage

Snap4City (C), February 2024

MegaWatt per hour





Please note on: Data Type

- Value Types have only a few number of **Data Types** because they represent how the data area treated into the system
- Therefore: main Data Types are:
 - Float: numbers with decimals large as you like, etc.
 - Integer: numbers, booleans (0/1), on/off as 1/0, etc.
 - String: url, links, names, id, descriptions, status code, SURI, etc.
 - Json Objects: structured data, vector, matrices, etc.





The Data Models can be simply instantiated from

- **a)FIWARE Smart Data Models**, versioning, and harvesting the standard repository
- **b)Entity Model / IoT Device Model** which are accessible into the Snap4City environment
- c) Excel files by using Data Table tool, which extracts the model from the excel table and automatically creates Entity Model / IoT Device Model, Entity Instances / IoT Devices and data attached to them
- d)Creating a custom Entity Model / IoT Device Model in standard Snap4City format via Entity Directory / IoT Directory





Connections among Entities

Where	Entity Model (IOT Device Model)	Entity Instance (IOT Device)	Entity Message at 23-12-2019T20:15:00	Entity Message at 23-12-2019T20:30:12
Broker	Broker: OrionUNIFI			
Broker	Protocol: NGSI			
Info	ID: string	ID: "park45"	park45	park45
Position	GPS: lat, long	GSP: 43.12, 11.34	GSP: 44.1256, 11.1234	GSP: 44.1259, 11.1233
Static attribute	Description: string	Description: "parking massaia"		
Static attribute	MyAddInfoSURI: string	MyAddInfoSURI: "http:///InfoPersonal"		
Values	dateObserved: Timestamp		23-12-2019T20:15:00	23-12-2019T20:30:12
Values	FreeSlots: Integer, #		FreeSlots: 345	FreeSlots: 234
Values	TodayCarSURI: string		TodayCarSURI: "http:///CarNF126GD"	TodayCarSURI: "http:///CarGF789KK"
Values	Temperature: float, celsius		34	34

T SYSTEMS Model meaning


- ID: is the unique identifier for reconnecting Temporal Instances with register (2) Entity / Devices
- Static Attributes:
 - Are typically associated with instances of the IOT Device.
 E.g.:, You have a set of parking areas, each of them is located in a specific street, and bas its one name, etc.
 - Different kinds of attributes can be set for each SubNature. Their definition has to be prepared into the Knowledge Base ⁽²⁾ for automated indexing.
- Values: they are time varying variables (temporal values/instances)
 - They change over time, the timestamp of the time series is conventionally «dateObserved» in Snap4City
 - In new SensorMobile HLT, also GPS can be changing over time as in the MyKPI
- NOTE for:
 - names/IDs: Spaces or strange characters are not allowed in the. Please use simple alfphanumeric strings, it is a limitation of many solutions including Orion Broker and increase interoperability of your data.
 - Values of attributes and variables: can be UTF8, but similarly, they do not accept: () <> " '; = into values
 - <u>https://fiware-orion.readthedocs.io/en/master/user/forbidden_characters/index.html</u>







Entity/IoT DISIT DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB Directory INGEGNERIA DELL'INFORMAZIONE Entity / Device Model (2)

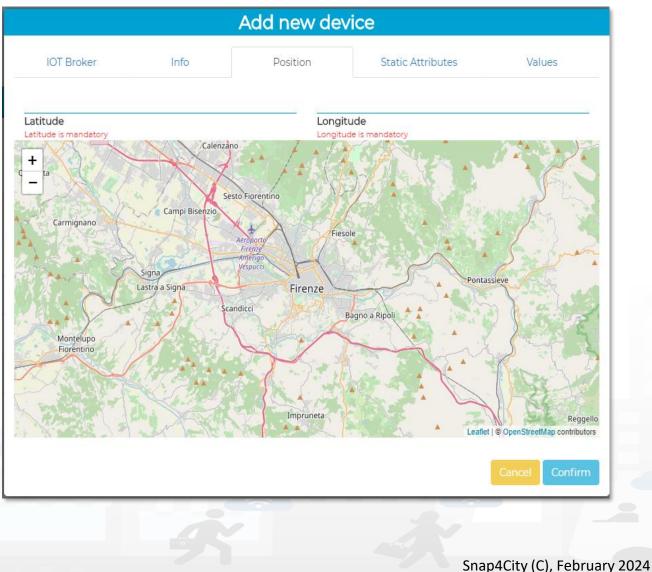

UNIVERSITÀ Degli studi

FIRENZE

DINFO

DIPARTIMENTO DI

		Edit Model - Char	gingStationMode	
General Info		IoT Broker	Static Attributes	Valu
chargingStateValue		charging_state (Chargir 🗸	some coded status (sta: 🗸	string 🔨
Value Name Ok		Value Type	Value Unit 📳 Ok	Data Type
Refresh rate	~	900	Remove Value	
Healthiness Criteria		Healthiness Value		
stationStateValue		charging_station_state 🗸	some coded status (stat 🗸	string 💊
Value Name ^{Ok}		Value Type 📋 Ok	Value Unit 🖺	Data Type
Refresh rate	~	900	Remove Value	
Healthiness Criteria		Healthiness Value		
dateObserved		timestamp (Timestamp 🗸	timestamp in millisecor 🗸	string 🔨
Value Name Ok		Value Type	Value Unit 📳 Ok	Data Type
Refresh rate	~	900	Remove Value	
Healthiness Criteria		Healthiness Value		
chargingState		charging_state (Chargir 🗸	some coded status (sta: 🗸	string 🗸
Value Name ^{Ok}		Value Type 📋 Ok	Value Unit 📳 Ok	Data Type
Refresh rate	~	900	Remove Value	
Healthiness Criteria		Healthiness Value		
stationState		charging_station_state 🗸	some coded status (sta: 🗸	string 🔨
Value Name Ok		Value Type 📋 Ok	Value Unit 📳 Ok	Data Type
Refresh rate	~	900	Remove Value	
Healthiness Criteria		Healthiness Value		
Add Value				Cancel Confin



101





SURI Connections

From a

- *Static* Attribute of an Entity Instance to another Entity Instance, as highlighted in green in previous table.
- *Dynamic* Value/Variable of an Entity Message of an Entity Instance to another Entity Instance, as highlighted in green in previous table.

- the example reports a
 - static connection and
 - dynamic connection to change the car at a given timestamp, note also change of position and other parameters, if needed

👖 App 💡 Maps 💪 Google M Gmail 🎸 Snap4City 🔇 Snap4 🧾 Calendar ຊ Translate 🔶 Google Scholar Cita... 咳 DISIT 咳 DISIT old 😝 Facebook 🔇 DataCe



• They are triples

Subjectpredicate-Object

- Subject=SURI
- Predicate=p
- Object = o

р	0
http://www.w3.org/1999/02/22-rdf-syntax-ns#type	http://www.w3.org/ns/sosa/Sensor
http://www.w3.org/1999/02/22-rdf-syntax-ns#type	http://www.disit.org/km4city/schema#Traffic_sensor
http://www.w3.org/ns/ssn/implements	http://www.disit.org/km4city/resource/iot/traffic
http://www.disit.org/km4city/schema#hasAttribute	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/avgDistance
http://www.disit.org/km4city/schema#hasAttribute	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/occupancy
http://www.disit.org/km4city/schema#hasAttribute	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/thresholdPerc
http://www.disit.org/km4city/schema#hasAttribute	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/speedPercentile
http://www.disit.org/km4city/schema#hasAttribute	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/dateObserved
	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/avgTime
	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/concentration
	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/vehicleFlow
	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/averageSpeed
http://www.disit.org/km4city/schema#hasAttribute	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/congestionLevel
http://www.disit.org/km4city/schema#hasAttribute	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/anomalyLevel
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/average_vehicle_distance
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/average_vehicle_speed
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/average_vehicle_time
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/vehicle_concentration
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/vehicle_speed_percentile
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/vehicle_threshold_perc
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/vehicle_flow
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/timestamp
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/anomaly_level
http://www.w3.org/ns/sosa/observes	http://www.disit.org/km4city/resource/value_type/traffic_congestion
http://www.w3.org/ns/ssn/hasSystemCapability	http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO759/systemCapability
http://purl.oclc.org/NET/UNIS/fiware/iot-lite#exposedBy	http://www.disit.org/km4city/resource/iot/orionUNIFI
http://www.disit.org/km4city/schema#protocol	"ngsi"
http://www.disit.org/km4city/schema#format	"json"
http://www.w3.org/2003/01/geo/wgs84_pos#long	11.25673
http://schema.org/addressLocality	"FIRENZE"
http://schema.org/name	"METRO759"
http://schema.org/streetAddress	"Lavagnini P.zza Della Liberta' (38)"
	43.78278
	http://www.disit.org/km4city/resource/RT04801703772TO
http://www.w3.org/2003/01/geo/wgs84_pos#geometry	"POINT(11.256730079651 43.782779693604)"^^ <http: schemas="" virtrdf#geometry="" www.openlinksw.com=""></http:>
http://www.disit.org/km4city/schema#model	"metrotrafficsensor"
http://www.disit.org/km4city/schema#producer	"metro"

'DISIT'

www.disit.org/km4city/resource/iot/traffic ma#organization






References/Links to Entities Instances / IoT Devices







Relationships among Devices/Entities, POI and MyKPI

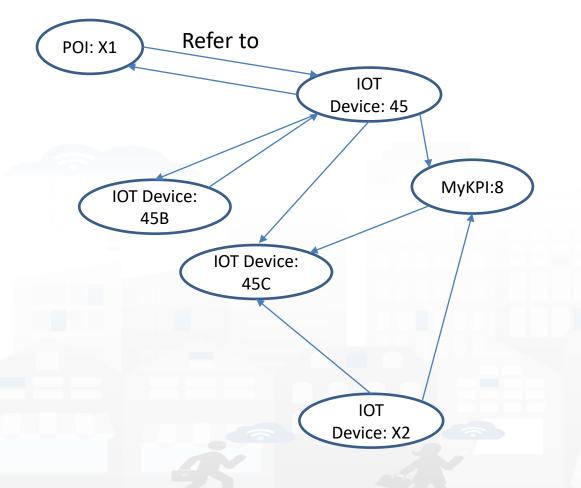

- Devices and POI may refer to:
 - IoT Devices/Entities, POI, MyKPI, Heatmaps, etc.
 - The Links may change over time
- MultiDataMap can be used for navigation:
 - Among: IoT Devices, POI, MyKPI
 - Automated focus
 - Accessing Time Trends





IoT device with References to other and MyKPI

"id":"ThermalBOX1",

"type":"thermalbox",

"dateObserved":{"type":"string","value":"2022-02-24T17:15:34.609Z"},

"latitude":{"type":"float","value":"43.76965"},

"longitude":{"type":"float","value":"11.25570"},

"SHTdevice":{"type":"string",

"value":"http://www.disit.org/km4city/resource/iot/orionFirenze2/Firenze/SHT20lab_new"}, "cam51count":{"type":"string","value":"datamanager/api/v1/poidata/17058000"}, "cam52count":{"type":"string","value":"datamanager/api/v1/poidata/17058001"},

Value Type: Identifier Value Unit: ServiceURI Data Type: String

//any query: such as those of the Selector





Data Modeling example1











IoT Device Model: Driver

Nature:....

Subnature:

Lat, lon: Default (they do not need to be specified in the variables, they are provided by default, but values have to be imposed at the instantiation of the device from model), they are float

Device in Mobility: No (the variable do not need to be specified, while the value has to be set to state if the Lat,Lon are going to change, moving the device or not)


Value_name	Value Type	Value Unit	Data Type
dateObserved	Timestamp	Timestamp in ms	String
identifier	ID	text	String
name	entity	text	String
surname	entity	text	String
age	age	number	Integer
sex	status	some coded status	String
language	entity	text	String
email	entity	text	String
phone	entity	text	String
address	entity	text	String
locality	entity	text	String
city	entity	text	String
nationality	entity	text	String
civicNmber	entity	text	String
dateofBorn	DateTime	Timestamp in ms	String
gender	status	some coded status	String
driverHelthiness	Identifier	ServiceURI	String
driverEvent	Identifier	ServiceURI	String
driverAnalysis	Identifier	ServiceURI	String
Vechicle	Identifier	ServiceURI	String







IoT Device Model: driverHe	Ithiness		
Nature:			
Subnature:			
Lat, lon:			
Device in Mobility:			
Value_name	Value Type	Value Unit	Data Type
dateObserved	Timestamp	Timestamp in ms	String
kind			
levelAttentionFactor1			
levelAttentionFactor2			
+			
driver	Identifier	ServiceURI	String










IoT Device Model: Vehi Nature:	cle		
Subnature:			
Lat,lon:			
Device in Mobility:	••••		
Value_name	Value Type	Value Unit	Data Type
dateObserved	Timestamp	Timestamp in ms	String
producer	entity	text	String
model	entity	text	String
plate	entity	text	String
companyID	entity	text	String
velocity	velocity	km/h	float
acceleration	acceleration	m/s2	float
Status	status	some coded status	String
energyLevel	energy level	percentage	Float
kmTotal	distance	km	Float
thankLevel	energy level	percentage	Float
vehicleEvent	Identifier	ServiceURI	String








IoT Device Model: VehicleEvent								
Nature:								
Subnature:								
Lat,lon:								
Device in Mobility:								
Value_name	Value Type	Value Unit	Data Type					
dateObserved	Timestamp	Timestamp in ms	String					
eventID	ID	text	String					
eventKind	status	some coded status	String					
status	status	some coded status	String					
vehicle	Identifier	ServiceURI	String					









Entity Instance

Entity Model

Entity Messages with dateObserved

Data Model of the Driver

DIPARTIMENTO DI INGEGNERIA DELL'INFORMAZIONE

Register to

instantiate

- Name: string
- Surname: string
- Age: number
- Weight: number
- Phone: string
- **Email: string**
- DriverAnalysisID: **ServiceURI**

.

Register to instantiate

Driver: user45

- Name: David
- Surname: Smith
- Age: 45

.

DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB

- Weight: 78 Kg
- Phone: +49345096103
- Email: david89@gmail.com
- DriverAnalysis: http://.../user45driveranalysis

Write SUR to create cross references

DriverAnalysis: user45driveranalysis

- DriverID: http://.../user45 .
- dateObserved: 12-03-2022T12:00:00 .
- Status: "none" .
- Location: null
- Doctor: null
- **Tools: null**

.....



DriverAnalysis: user45driveranalysis

- DriverID: http://.../user45
- dateObserved: 25-04-2022T12:00:00
- Status: "bad"
- Location: truck
- Doctor: null
- **Tools: Eyetrack**
-

New update on user45driveranalysis by sending a message

DriverAnalysis: user45driveranalysis

- DriverID: http://.../user45
- dateObserved: 22-03-2022T12:00:00
- Solution of the solution of th Status: "good"
 - Location: room45
 - Doctor: https://....
 - Tools: null


.

New Hodore On





Example of Data Model Diagram

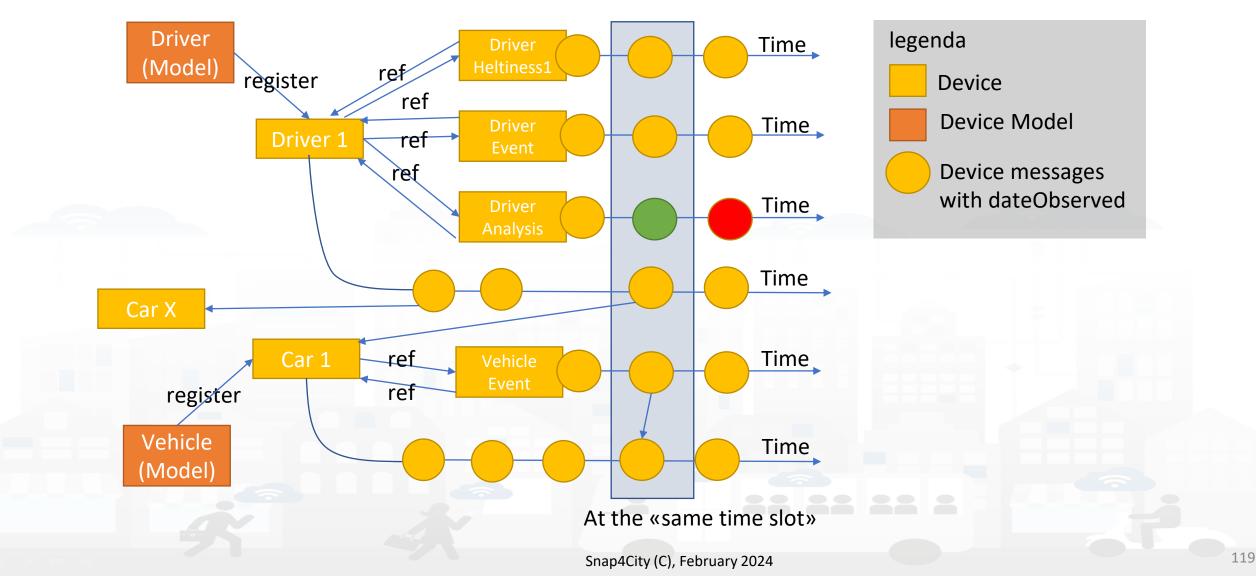



120


Example of Data Model Diagram


UNIVERSITÀ Degli studi

FIRENZE

DINFO

INGEGNERIA DELL'INFORMAZIONE DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB

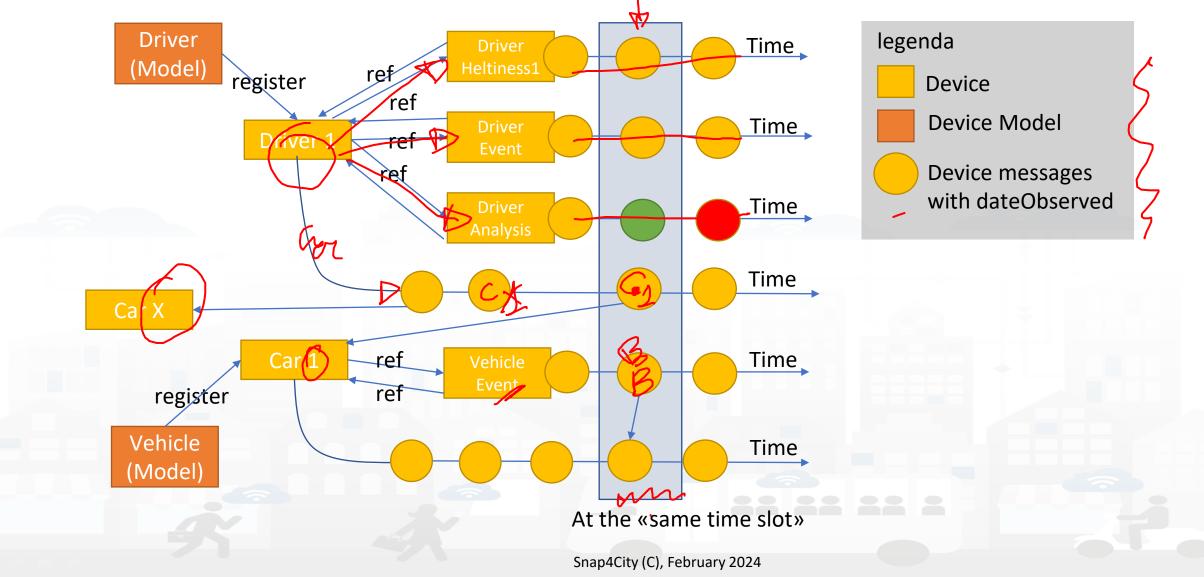

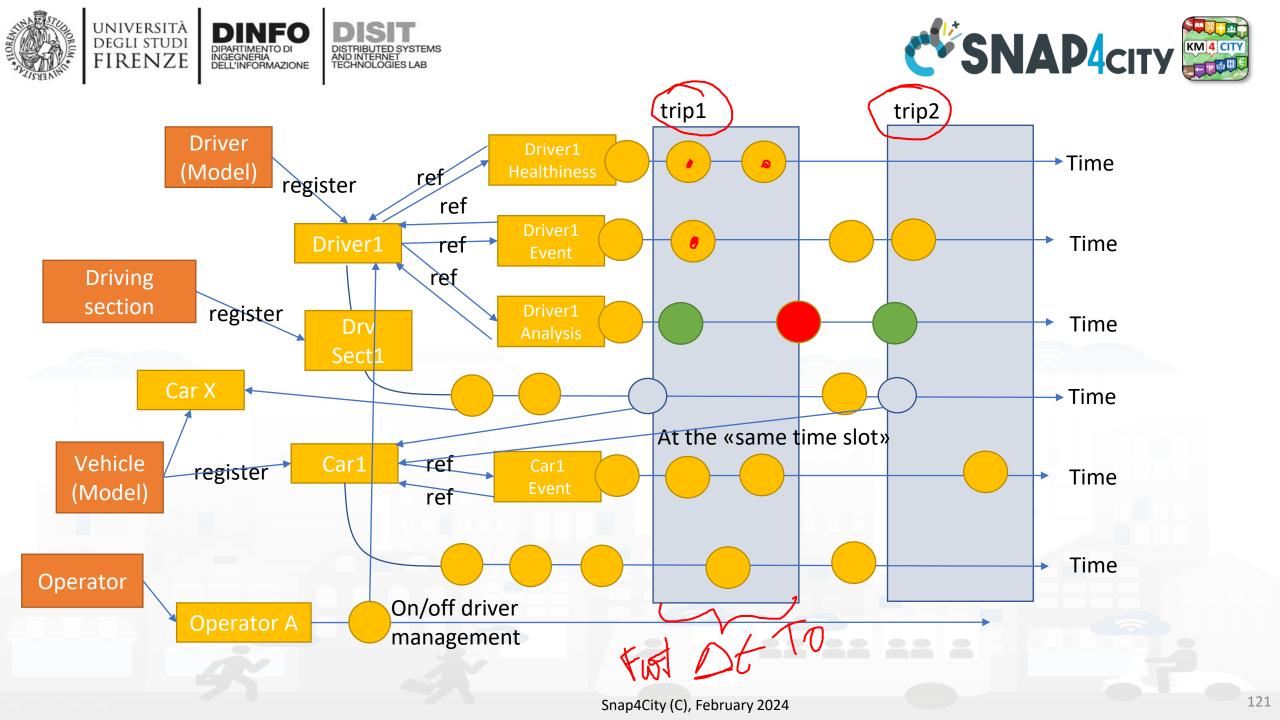



UNIVERSITÀ


degli studi FIRENZE

TOP



TOOLS for Data DesignPart 2and HLT ExploitationPart 5




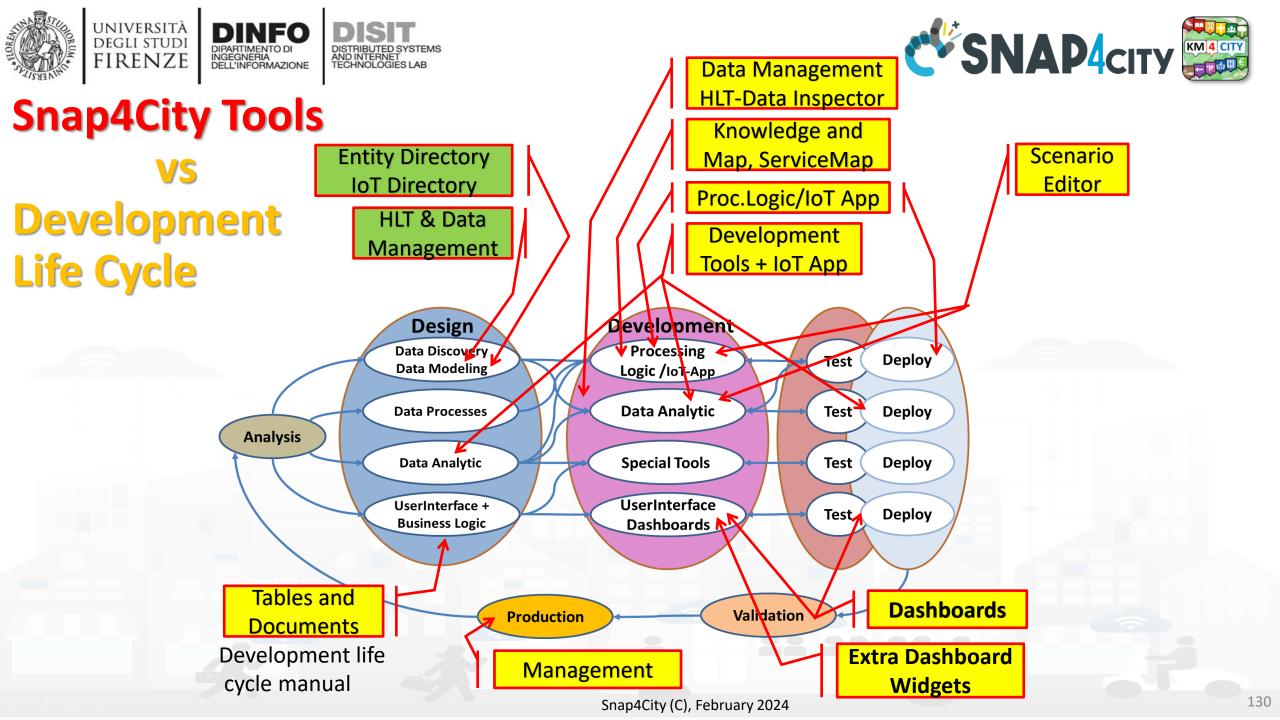





Snap4city Data Ingestion Diagram

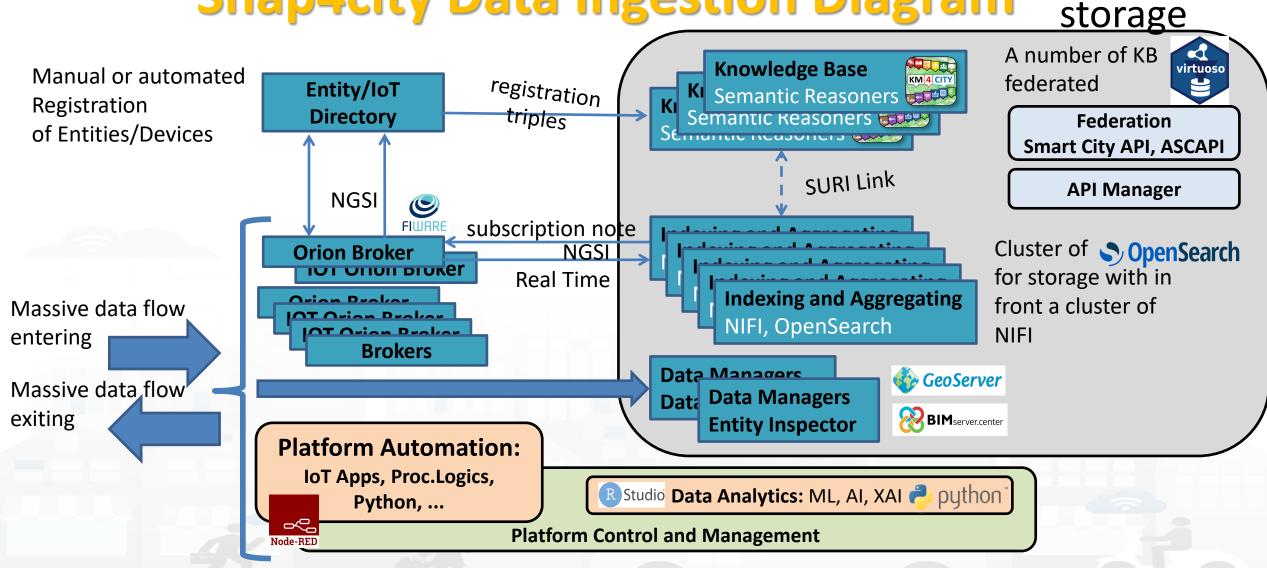






Any Entity has a Semantic Classification


Nature

- Accommodation +
- Advertising +
- AgricultureAndLivestock +

INGEGNERIA DELL'INFORMAZIONE AND INTERNET TECHNOLOGIES LAB

- 🔉 CivilAndEdilEngineering 🛨
- 👙 CulturalActivity +
- EducationAndResearch +
- 🛃 Emergency +
- 🛂 Entertainment +
- 🖬 Environment +
- 6 FinancialService +
- GovernmentOffice +
- 🖶 HealthCare +
- 🚽 IndustryAndManufacturing +
- IoTDevice +
- MiningAndQuarrying +
- ShoppingAndService +
- I TourismService +
- TransferServiceAndRenting +
- 😵 UtilitiesAndSupply 🛨
- 📮 Wholesale +
- 🕑 WineAndFood +



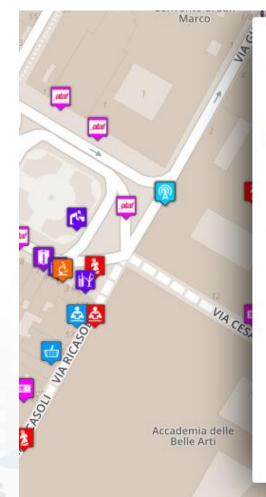

Piazza Santissima Annunziata

LINKED OPEN GRAPH Name: 778fcaed9e6cb2af722f13c260aab51e Nature: CulturalActivity Subnature: Squares Digital Location

Cap: 50144 City: FIRENZE Prov.: FI Photos:



Description: Al centro della piazza compare la statua equestre di Ferdinando I, Granduca di Toscana, opera del Giambologna e le due fontane marine di Pietro Tacca. Incorniciano lo spazio pubblico, colorato di scene di vita quotidiana, monumenti di vario genere: Palazzo Grifoni; il portico della confraternita dei Servi di Maria, opera di Antonio da Sangallo e Baccio d Agnolo; la chiesa della Santissima Annunziata con il portico del XVII secolo; I ospedale degli Innocenti del Brunelleschi


Snap4City (C), February 2024









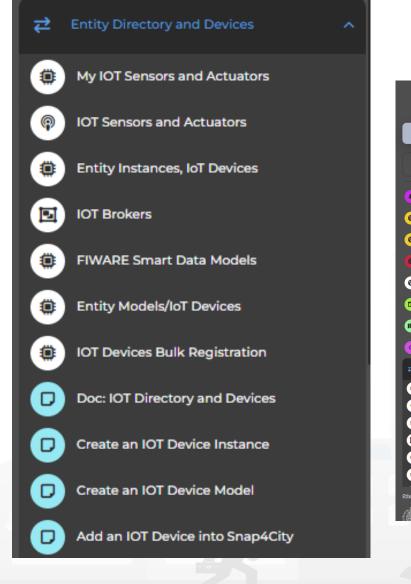

Entity / lot Directory: User Role

CSNAP4city	Entity M	lodels/loT	Devices					Jser: paolo.disit, Org: I Role: AreaManager, Level . <mark>OGOUT</mark>			to Legacy ayout
🕐 Dashboards (Public)											
Ky Snap4City.org ₹		302 MODELS									
www.snap4solutions.org										Nev	w Model
Dashboards of My Organization	Show 10	✓ entries							Search:		
My Dashboards in My Organization		Device Model	Description) Ownership	Organization	Kind	Producer	Device Type	Edit	Delete	View
My Data Dashboard Dev Kibana	C Ra	aspberry snap4city 1	Raspberry PI 3 Model B Scheda madre CPU 1.2 GHz Quad Core, 1 GB RAM	DELEGATED	DISIT	sensor	Raspberry PI	Ambiental			VIEW
Extra Dashboard Widgets 🗸 🗸 🗸	C Ra	aspberry snap4city 2	Raspberry PI 3 Model B Scheda madre CPU 1.2 GHz Ouad Core, 1 GB RAM	DELEGATED	DISIT	sensor	Raspberry PI	Ambiental			VIEW
Data Management, HLT 🗸	C Ar	duino Uno	Arduino Model B Scheda madre CPU 1.2 GHz Quad Core, 1 GB RAM	DELEGATED	DISIT	sensor	Arduino	Ambiental			VIEW
Processing Logics / IOT App	C Ar	duino uno-bis	Arduino Model B Scheda madre CPU 1.2 GHz Quad Core, 1 GB RAM	DELEGATED	DISIT	sensor	Arduino	Ambiental			VIEW
Entity Directory and Devices 🗸	🔁 sig	gfox	SigFox Model B Scheda madre CPU 1.2 GHz Quad Core, 1 GB RAM	DELEGATED	DISIT	sensor	SigFox	Ambiental			VIEW
My IOT Sensors and Actuators	🗈 Sn	nap4AllButtonV1	Snap4AllButtonV1	DELEGATED	DISIT	sensor	Snap4All	Snap4AllButtonV1			VIEW
IOT Sensors and Actuators		aspberry snap4city 1 Certificate	Raspberry PI 3 Model B Scheda madre CPU1.2 GHz Quad Core, 1 GB RAM with certificate	DELEGATED	DISIT	sensor	Raspberry PI	Ambiental			VIEW
Entity Instances, IoT Devices		atacenter3dht22	datacenter3dht22	DELEGATED	DISIT	sensor	disit	raspberry			VIEW
IOT Brokers FIWARE Smart Data Models	O Th	nermometer	This model represents a generic device that can measure a temperature	DELEGATED	DISIT	sensor	Generic	Ambiental			VIEW
Entity Models/IoT Devices	O Air	rConditioner	Generic model representing a simple conditioner with only the status attribute	DELEGATED	DISIT	actuator	Generic	Ambiental			VIEW
<u>, Policy Caokies Policy</u> 🏟 🕻	4									_	Þ
UNIVERSITÀ DINFO DISIT	Showing 11	to 10 of 89 entries			Previous	1	2 3	4 5		9	Next





Entity Directory for Beginners

- Browse and see models and entities/devices of other users, that publiched them
- Create your Entity / Device Models
 - User the dictionary approach: value type, data type, value unit
 - Manage delegation of the models and ownership
- Create your Entities / Devices from scratch and/or from models
 - Several models are ready to be used.....
- Send a Message to a Device, thus to the broker
- Read a Message from the Broker, see the message forma expected to be sent at the Broker in NGSI format





IoT Device Model and Devices Data Dictionary: updated at 11/2022

https://www.snap4city.org/818

IoT Device Model and Devices Data Dictionary: updated at 11/2022

View Edit Track Access control Convert

Any update and additon to the dictionary of snap4city.org has to be requested to snap4city@disit.org

if you have your own instance of the platform you can define your own dictionary and request a copy of the snap4city.org dictionary

The dictionary is used into the IoT Device Model definition, in mapping smart data models, and in creating full custom devices.


https://www.snap4city.org/drupal/sites/default/files/image_from_word/fil...

value type	Description	possible value Units	Possible Data Types
actuator_canceller	Actuator Canceller		string
actuator_deleted	Actuator Deleted		integer
actuator_deletion_date	Actuator Deletion Date	timestamp	string
air_quality_index	Air quality index		float
altitude	Altitude	m	float,integer
angle	angle	deg	float
annual_C6H6_average	annual_C6H6_average	ppm, mg/m3, µg/m³	float
annual_C6H6_exceedance_count	annual_C6H6_exceedance_count	#	integer,float
annual_CO_average	annual_CO_average	ppm, mg/m3, µg/m³	float
annual_CO_exceedance_count	annual_CO_exceedance_count	#	integer,float
annual_NO2_average	annual_NO2_average	ppm, mg/m3, µg/m³	float
annual_NO2_exceedance_count	annual_NO2_exceedance_count	#	integer,float
annual_03_average	annual_O3_average	ppm, mg/m3, µg/m³	float





INGEGNERIA DFI L'INFORMAZIONE

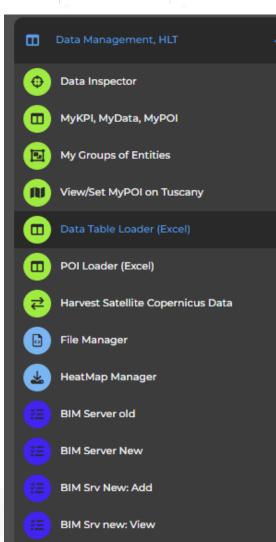


Data management, HLT

SNAP4city

- Data Inspector
- MyKPI.....
- My Groups of Entities
- HeatMap Manager
- BIM Server.....
- Open Data...
- For user kind of users, other Managers:
 - ODM, File, TV CAM, Traffic Flow,

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES



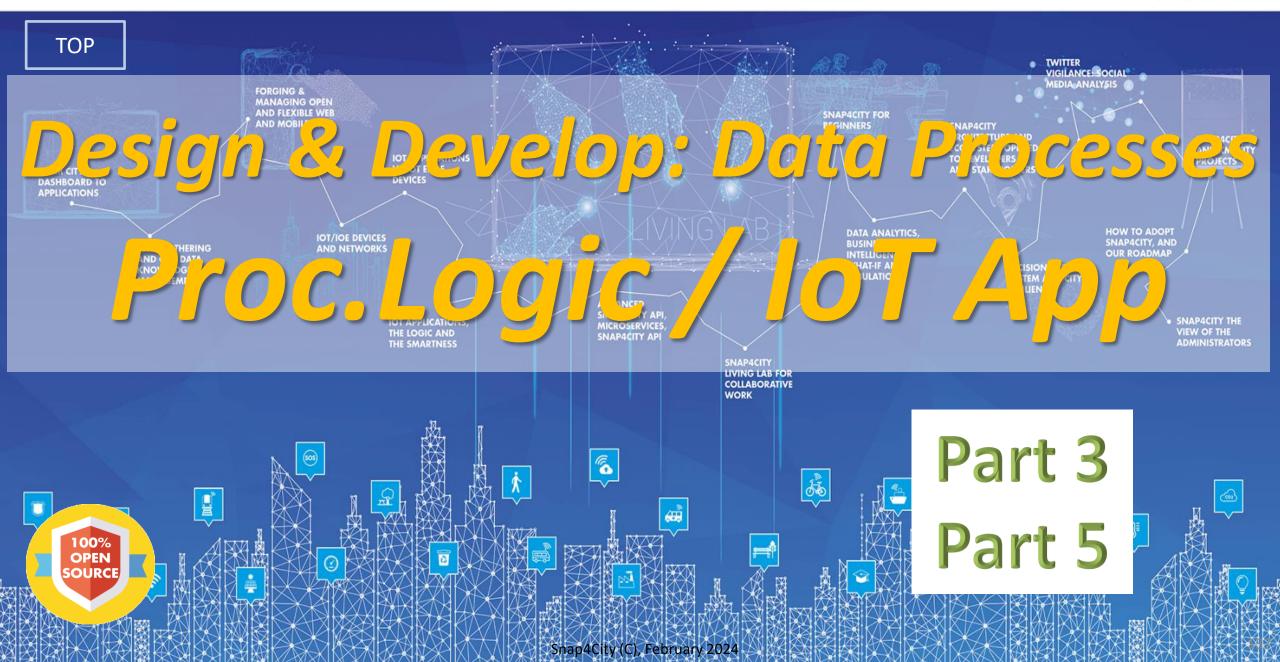






Activities for IoT App data processes


- Data Ingestion, gathering, harvesting, grabbing
- Data Transformation, transcoding, decoding, converting, reformatting, ..
- Data load to storage, retrieve from storage
 - the load is typically performed loading data on some Internal Orion Broker V2/LD, or on some MyKPI storage
 - \circ the retrieval is typically performed using one of the several query / search nodes.
 - Many other kinds of storage connections are accessible in Snap4City Proc.Logic / IoT Apps
- Data Production, generation, reformatting, etc.
- Data Publication, post in other channels of any kind, etc.
- Server Side Business Logic as described in the following





Development Life Cycle Smart Solutions

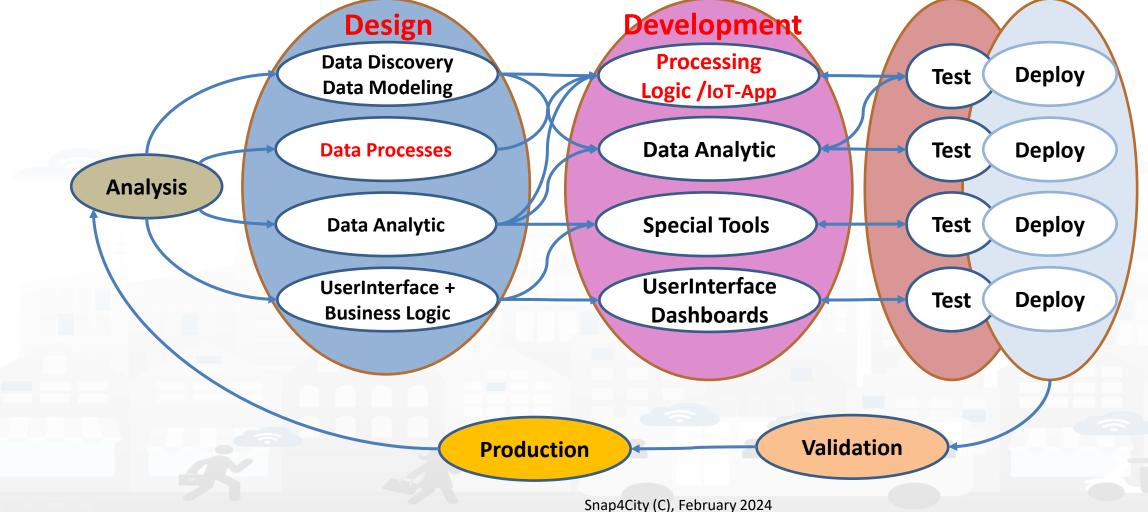

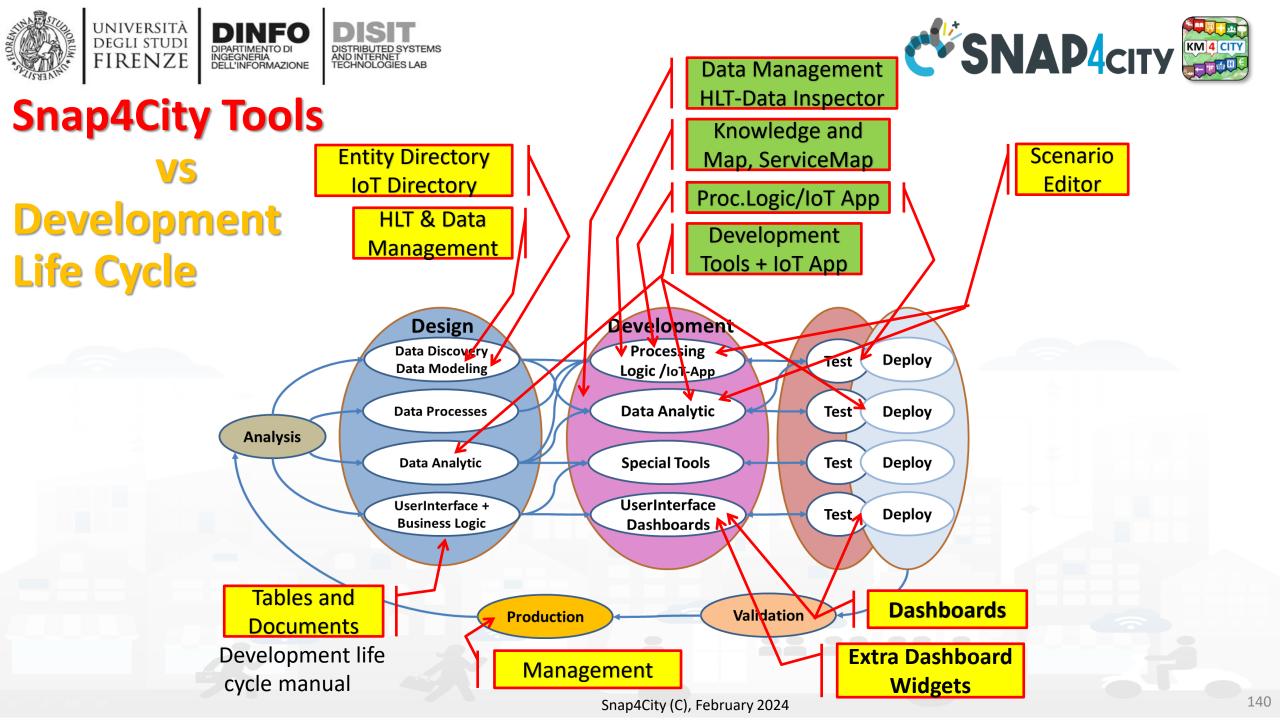



Design: Data Processes

RIBUTED SYSTEMS

AND INTERNET TECHNOLOGIES LAB

UNIVERSITÀ Degli studi

FIRENZE

TOP

INGEGNERIA DELL'INFORMAZIONE

> Part 3 Part 5










- **1.** Business Logic is going to be implemented in Proc.Logic (IoT App), with a set of flows.
- **2. Decompose your problem** and sequence diagram in single Data/event Flows, from client side and server side.
- **3. Identify the single Data/Event** Flow, as those that start from a certain event (periodic or provoked from other messages), and that finish with: sending of data in the storage, change status, send an event, provide a message into a dashboard, send an email, etc.
- 4. Design the single Data/Event Flows with a mixt of possible activities.
 - 1. The design can be performed using data flow diagrams.
 - 2. It can have sequences, switch, serialization, packing, joining, distribution, communication, transformation, search, etc.
- 5. When the design of Data/Event Flow mechanism is clear the designers can pass to directly sketch the flow in Node-RED which is a visual programming.
- 6. Incrementally improve the Proc.Logic (IoT App) Node-RED flows by adding nodes needed
- **7. Once obtained the Proc.Logic** (IoT App) Node-RED flows in the correct data model you can send data to the ingestion broker, but also perform many other actions on several services.





IoT App / Proc.Logic Design, for each Data/Event Flow

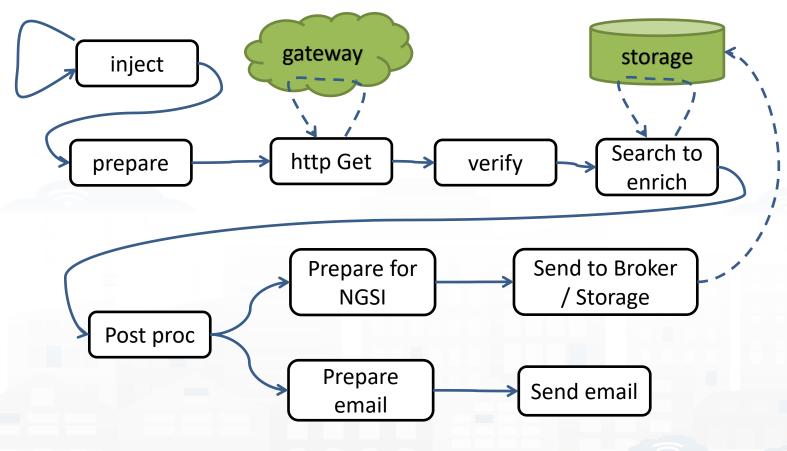

a. Periodically activate the flow
b. Call a gateway to get data
c. Verify the correctness of data
d. Enrich the data with other information coming from Cloud data into the storage

- e. Transform the data in the correct forma
- f. Send the data into the IoT Broker, and thus send the data in the storage on a specific IoT Deviceg. Send also a notification via email



Develop: Data Processes

AND INTERNET TECHNOLOGIES LAB

UNIVERSITÀ Degli studi

FIRENZE

TOP

INGEGNERIA DELL'INFORMAZIONE


> Part 3 Part 5








How the Dashboards exchange data

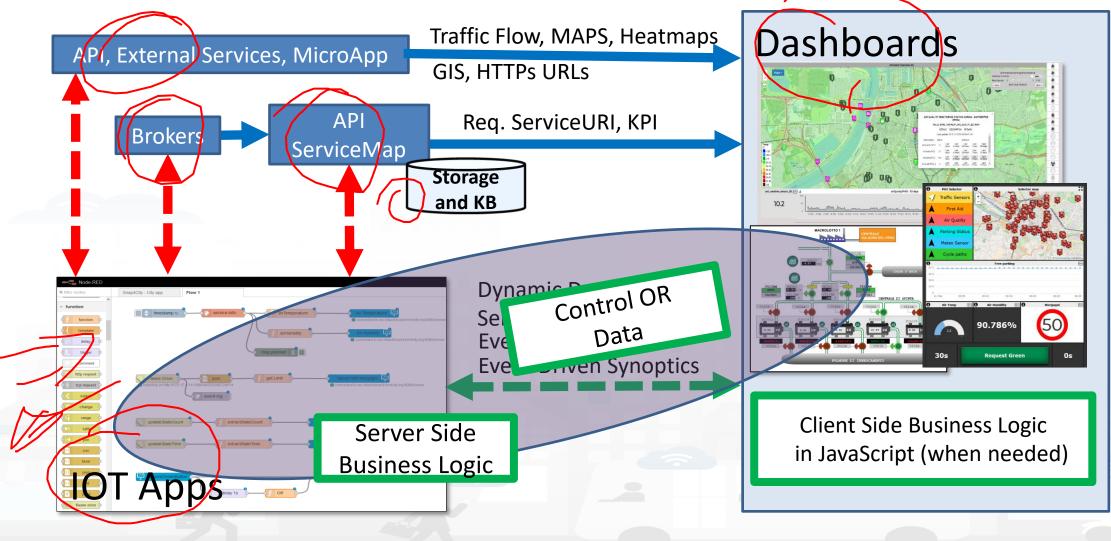






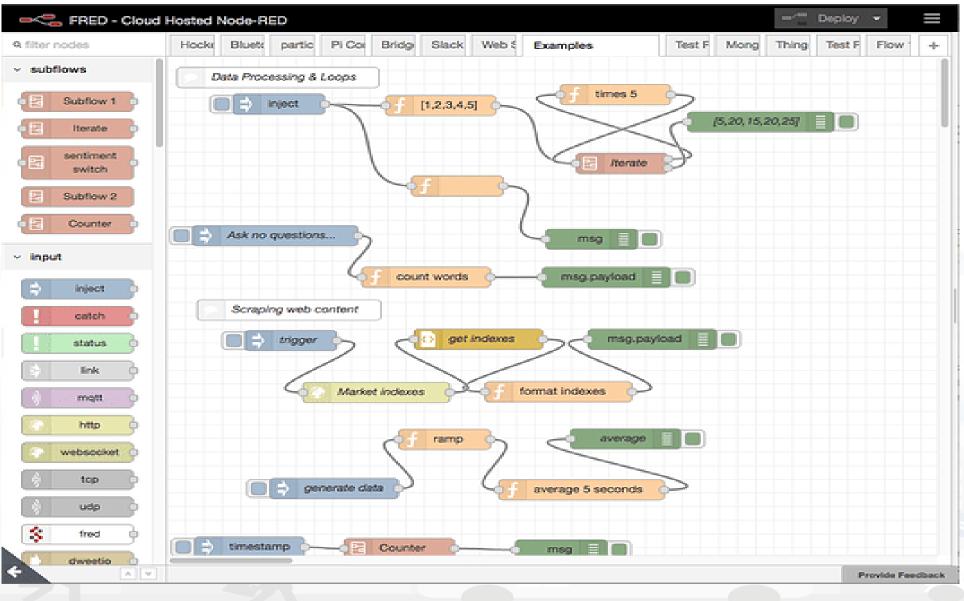





Proc.Logic (IoT App) Design, for each Data/Event Flow

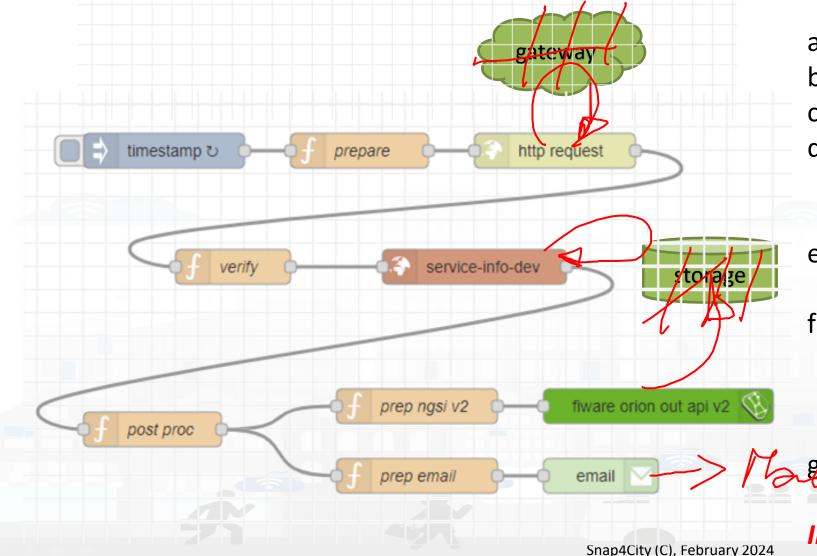

- a. Periodically activate the flow
- b. Call a gateway to get data
- c. Verify the correctness of data
- d. Enrich the data with other information coming from Cloud data into the storage
- e. Transform the data in the correct forma
- f. Send the data into the Broker, and thus send the data in the storage on a specific Entity Instance

g Send also a notification via email


Implicit services are not drawn





A sample of Data Ingestion

fiware orion out api v2



{"id":"mydev",

INJECT

```
"type":"mydevSensor",
```

"anID":{"type": "integer", "value": "http://www.disit.org/km4city/resource/iot/...../anuser"},

"VDDValue":{"type":"float","value":arandvalue},
"dateObserved":{"type":"string","value":time_now},
"latitude":{"type":"float","value":"28.61810"},
"longitude":{"type":"float","value":"11.34300"},
"status":{"type":"integer","value":34}

function

// it is a time serie // it may move over time // it may move over time

return msg;

Posted data on IoT Brokers green nodes are automatically saved into the data Storage





Read and share Data and Context Data

o gei

service-info-dev



timestamp

1) Event driven from Broker, read last context data. It is not sure that this change is on Storage


2) Recollect data from Storage

- This node uses the Smart City API
- Any External Application can get the same data in authenticated authorized manner via Smart City API
- Smart City API is a better approach instead of producing a file outside or providing data via some local API service created from IoT Application (feasible but not protected)





- Please note that the most important blocks nodes to interact with the platforms are reported in this table to familiarize with the main concepts.
 They are actually families of blocks/nodes since many others are present that allow you to perform a very large number of other features.
- YOU DO NOT HAVE TO ACCESS AT THE API all is provided in terms of NODEs/BLOCKS into IoT APP. Everything can be parametrized via JSON passed in input to the nodes.
- Most of the nodes can be also configured once from their user settings but the JSON is primary mode for setting parameters.









Node shape	Description	Snap4City or standard
⇒ inject	To generate injection messages into a flow, scheduled or on manual demand by click it on left.	standard
f function	A java script function, from a JSON input to one or more JSON outputs, which can be produced by setting it.	standard
fiware orion out api v2	To send an Entity Message of an Entity Instance into the storage. The Entity Instance has to be registered on Entity Directory (IoT Directory) and you have to be the owner or to be delegated in READ-WRITE to send messages to it. The node represents the broker, so that the same node can be used to send any Entity Message you need.	Snap4city
fiware orion subscribe api v2	To subscribe the Processing Logic (IoT App) to receive event-driven notifications related to Entity Instances changes. The node is substantially a listener connected to an Orion Broker. You can subscribe to many Entities and then to get all of them from the output of the listener. The new version will go to provide an input port to send at this listener multiple subscriptions.	Snap4city
service info dev	Query call to Smart City API to get any information about a SURI, ServiceURI. There are many other Nodes which can be used to pose Smart City API queries in very simple manner and recover vectors of ServiceURIs.	Snap4city
service - search	To perform queries on the storage to obtain a list of ServiceURI. The nodes of this family can allow you to perform searching queries by filtering for distance, area, subnature/category, values of attributes, time period, etc.	Snap4city
email 🔽	Send email. With other nodes you can send Telegram, SMS, etc.	standard
http request	To send a REST CALL (get, post, etc.). Please USE THIS NODE ONLY for the access at external API and not to access at the Snap4City API for which a lot of MicroServices are accessible as NODEs/Blocks in the Processing Log @ and City @ arebs in the Processing Log @ and City @ arebs in the Processing Log @ and City @ arebs in the Processing Log @ and City @ arebs in the Processing Log @ and City @ arebs in the Processing Log @ and City @ arebs in the Processing Log @ arebs in the Processing @ arebs in the Processing @ arebs in the Processing @	standard

università degli studi FIRENZE	DIDARTIMENTO DI debug	A block which is printing on debug view the data JSON passed in its input. Please note that the node can be tuned to provide only msg.payload or the full JSON message, change configuration of	standard	
-	iotdirectory	the node. To create an Entity Instance (device instance) from a model	Snap4city	
-	new device from model	prepared on Entity Directory (IoT Directory).	C 4 11	
	change ownership my device	To change the ownership of an Entity Instance (IoT Device).	Snap4city	
	delegate my device	To delegate a certain Entity Instance (IoT Device) to some other user for which you have to know the Nickname. Delegations can be: <u>Read access</u> , <u>Read write</u> , Modify (to modify the Entity Instance structure).	Snap4city	
	single content	To show something on Snap4City dashboard with a single content widget (one of the simplest widgets). A large set of dashboard nodes/widgets to send and retrieve data to/from dashboards are provided. This specific Nodes allows to send on dashboard HTML formatted messages with some limitations. Full HTTP widget is also accessible. See in the following section for the Full list of Nodes for	Snap4city	
) mqtt in	Snap4City Dashboard Widgets. MQTT broker listener , to receive messages from the Broker. Another similar node can be used to send MQTT messages to the MQTT broker. This node allows to perform a subscription to a topic of the MQTT broker.	standard	
	python - data - analytic	DATA ANALYTICS Request performed on a Container including a Python data analytics, which is loaded into the node and the container is created at the first Deploy of the Processing Logic. Similar Approach is performed for RStudio Data Analytics.	Snap4city	
	o∎>≋ split o	SPLIT: This block takes in input a buffer, or an array, or an object and split it on a set of messages in output, for each line in the buffer, each element of the array, each element in the object, respectively.	standard	
	ot∎∎ join o	JOIN: This block takes in input a set of messages and join/merge them into a single message (string, buffer, <u>array</u> or object, etc.), on the basis of specific criteria.	standard	152

N






The Proc.Logic (IoT App) microservices

Actually, there are more than 180 nodes/blocks in the Snap4City libraries on Processing Logic (IoT App) which can really facilitate your life and save you time in producing Smart Applications for composition of the following microservices and using those that you can install from internet, thousands of functionalities:

- **Data ingestion**: more than 100 protocols IOT and Industry 4.0, web Scraping, external services, any protocol database, etc.
- Data access: save/retrieve data, query search on expert system, georeverse solution, search on expert system Km4City ontology, call to Smart City API, etc.
- Data Transformation/transcoding: binary, hexadecimal, XML, JSON, String, any format
- Integration: CKAN, Web Scraping, FTP, Copernicus satellite, Twitter Vigilance, Workflow OpenMaint, Digital Twin BIM Server, any external service REST Call, etc.
- Manipulation of complex data: heatmaps, scenarios, typical time trend, multi series, calendar, maps, etc.
- Access to Smart City Entities and exploitation of Smart City Services: transport, parking, POI, KPI, personal data, scenarios, etc.
- Data Analytic: managing Python native, calling and scheduling Python/Rstudio containers as snap4city microservices (predictions, anomaly detection, statistics, etc.)
- User interaction on Dashboard: get data and message from the user interface, providing messages to the user (form, buttons, switches, animations, selector, maps, etc.), send data to special graphical widgets: D3, Highcharts, etc.
- Custom Widgets: SVG, synoptics, animations, dynamic pins on maps, etc
- Event management: Telegram, Twitter, Facebook, SMS, WhatsApp, CAP, etc.
- Special tools as: routing, georeverse, Twitter Vigilance and sentiment analysis, etc.
- Hardware Specific Devices: Raspberry Pi, Android, Philips, video wall management, etc.
- **Etc**. etc.

Snap4City (C), February 2024

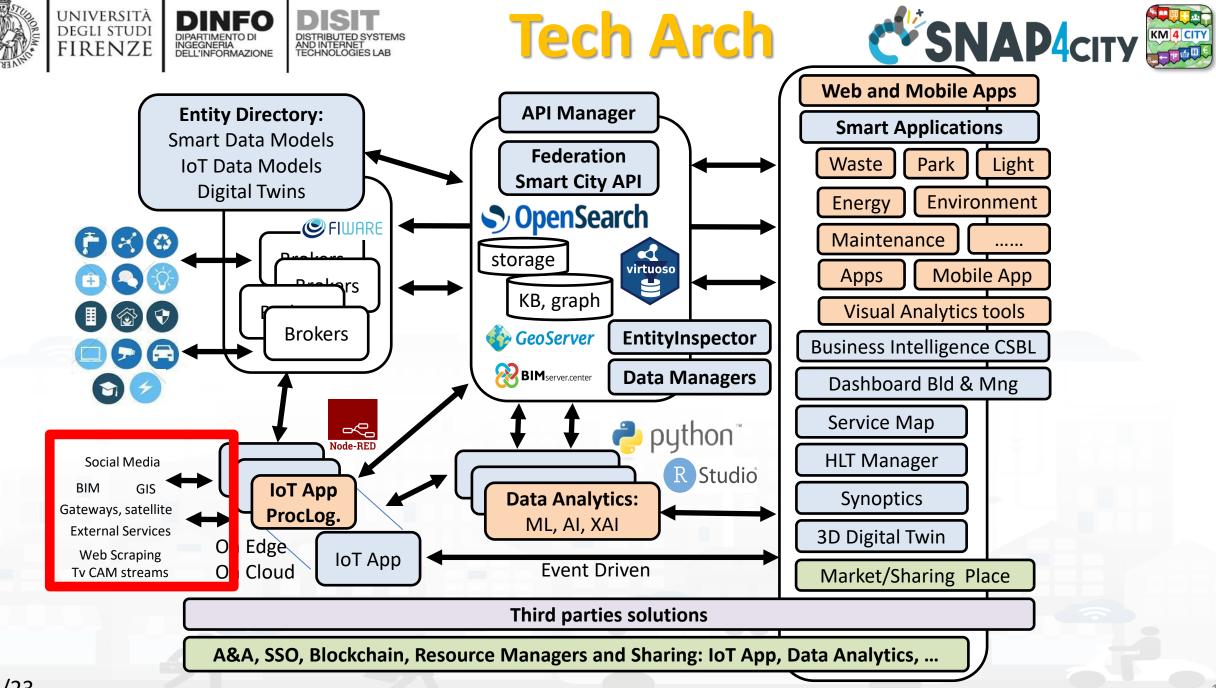





Some patterns


1) Hello world of node-red, the inject may provide a string to the debug.



2) Hello world of node-red at two steps, the inject provides a push while a JSON is created into the function as msg.payload = {.....} and sent/shown to/by the debug.



3) Event data reception from an MQTT broker, transformation and send it to the storage pushing data into the Orion Broker V2.

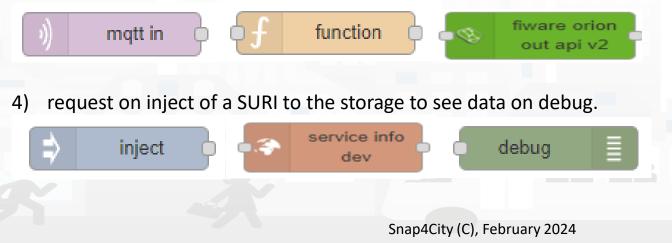





1) Preparation of data request on function, query to the storage and see data result on debug.



2) Event data reception from an MQTT broker, transformation to create an Entity Instance from a known Entity Model, debug to see eventual errors, for example if the device is already present (to avoid production of error, one may verify if the Entity Instance is already present by posing a query on the system):



3) Preparation of data parameters on function, request computing Data Analytic, see data result on debug.







157

Typical strange patterns that may be not efficient in most cases:

A. data reception from an MQTT broker, their transformation to create an Entity Instance from a known Entity Model, contextually to create and send an Entity Message into newly created Entity Instance, the debug to see eventual errors. This approach is typically strange since at each new message the Entity Directory is queried to see if the Entity is already be created and if not to create it and then pass the data to register the message. In most cases, it is much better to decouple the activity of creating with respect to that of sending message. In fact, this approach would largely reduce the ingestion rate and probably when the Entities are already created would create un-useful workload on Entity Directory (IoT Directory).



In most cases, it should be done the opposite: try to send the Entity Message, if it fails than create a new Entity Instance by known model, and if successful send again the Entity Message, or just wait for the new message to save it the first.








158

Sync data changes on Entities from an Event

If I would like to synchronize a device data A with another B by trigger event, I can do it in several manners. The first case would be the simplest. A triggering message arrives from MQTT event or from some NGSI ORION, or from some MyKPI, from dashboard event button, or email or anything, it does not matter. I can use two functions to prepare the message for A device and B device as follow:

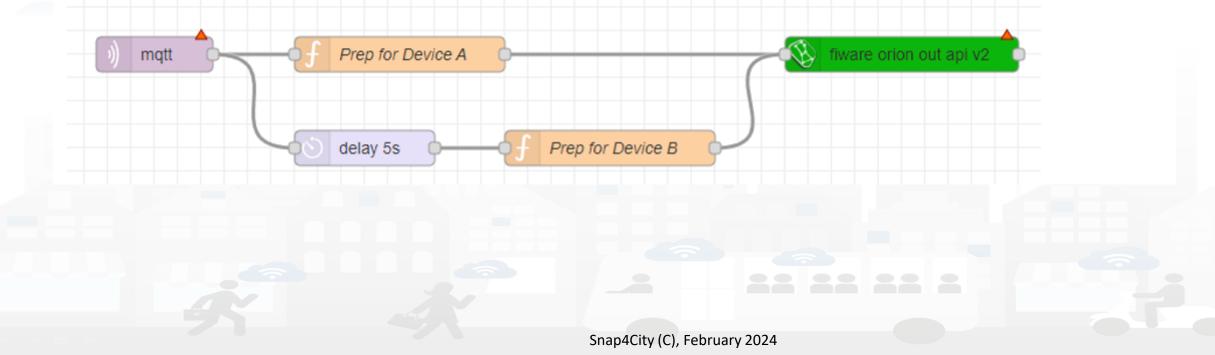







Subscribe on event from Broker, be carefull....

If the event for triggering is from another device/entity changed by some action performed posting a data on Orion Broker V2, you can subscribe with the event on the Orion broker by using a specific Node (do it once otherwise you risk receiving many events). Every time the device / entity receives a message you can take it and generated a new message for a different device and post it on Orion API V2.

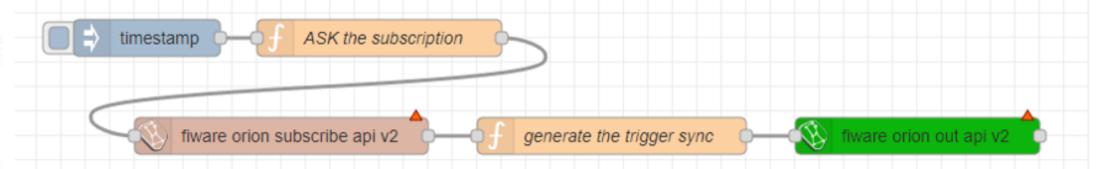

If you need to verify if the new data has been changed, you can read the last value of recipient Device/entity to compare and decide to update or not:

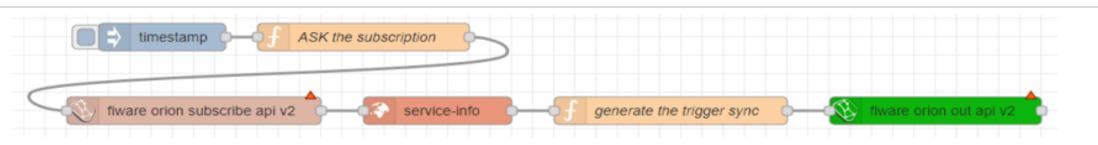





Delete Devices

IV.C.1.e- Delete Devices

Recently a node to delete devices has been added. It has to be used veery carefully since to delete data is always a terrible activity in a big data storage.

The delete of a device is allowed only for the Owner of the device and the root administrator of the platform. The device delete can be also performed from the Entity Directory and now with the Delete-Device node can be performed also from Proc. Logic / IoT App.

The classic pattern is as follows, including preparation, a RATE Limitation avoiding to provide more than one delete message every 50 seconds:



The delete device node needs in input Device ID and Broker ID. All data that you can recover from the Entity Directory.



TOP




Proc.Logic / IoT AppPart 3DevelopmentPart 5







Snap4city Data Ingestion Diagram

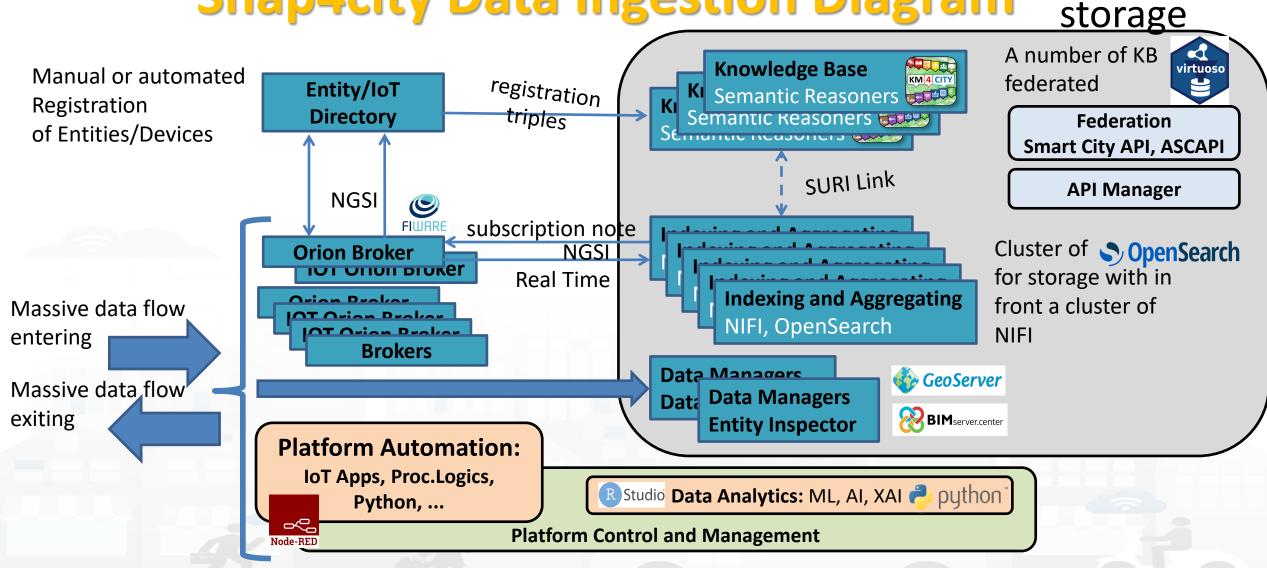



Proc.Logic / IoT App Development


DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB

UNIVERSITÀ Degli studi

FIRENZE

DINFO


DIPARTIMENTO DI INGEGNERIA DELL'INFORMAZIONE

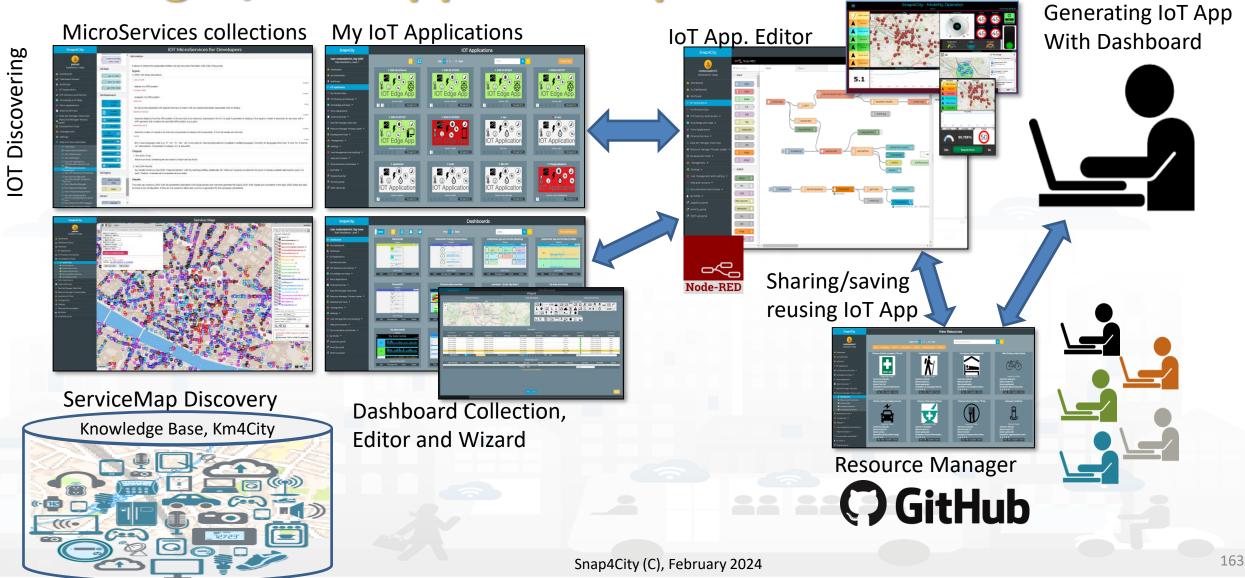



Corso 2023

User: paolo.disit, Org: DISIT Role: AreaManager, Level: 3 Switch to Legacy Layout

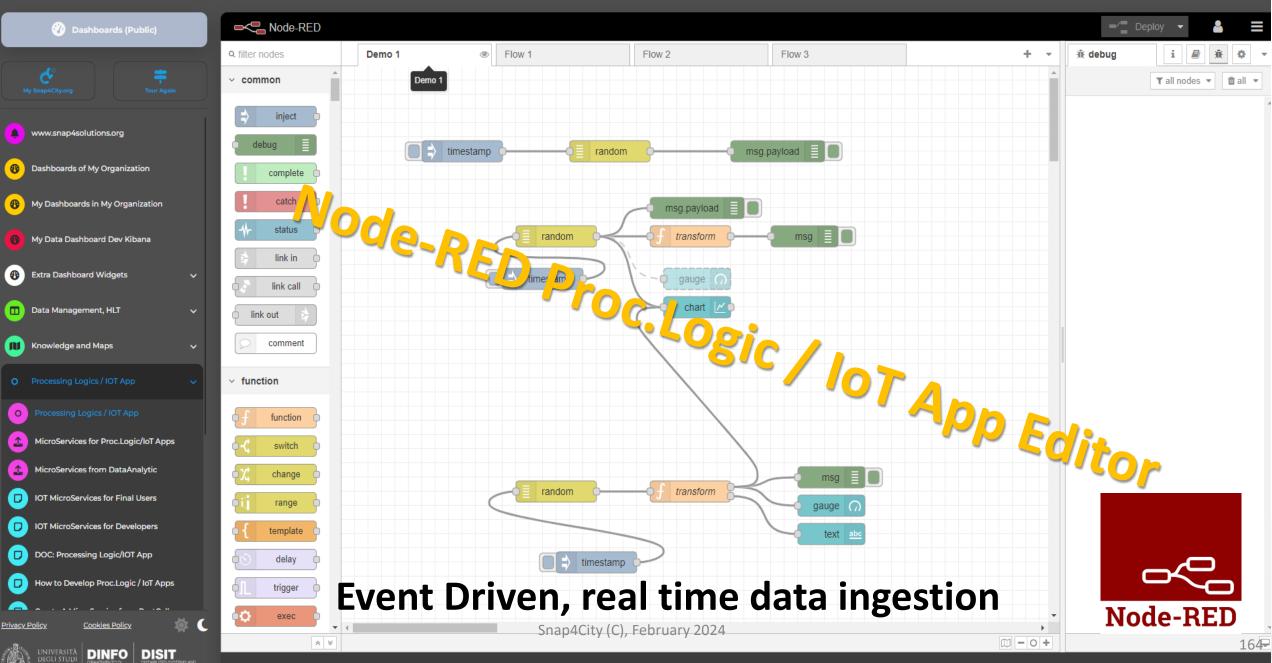

Basic Node.js Blocks on NodeRed on our Advanced IOT Apps



+ on IOT Edge Raspberry

✓ social	 Raspberry Pi
e mail	rpi gpio
twitter	rpi gpio
# irc	rpi mouse 💿
e mail M	rpi keyboard
irc #	camerapi takephoto
8+ google plus google places	rpi dht22
google calendar	imagecapture
✓ storage	Sense HAT
tail	Sense HAT
file 🛉	v network
mongodb	ping
file	
mongodb	

common	v network	v sequence	 social 	 dashboard 		
⇒ inject) mqtt in	split	email twitter in	button		
debug		¢⊪∎ join ∳	email 🖂	dropdown		
complete	http in	o †↓ sort o	twitter out	switch		
catch 🖸	http response	o ∋∋≣ batch o	~ advanced			
	http request			slider		
De link in	list websocket in 🔶	✓ parser	feedparser	123 numeric		
link out	websocket	• 1,2 csv •	∨ NGSI			
comment) tcp in	html 🕛	NGSI Entity	text input		
 function 		json	NGSI v2ToLD	date picker		
f function	tcp out	xml	< lwm2m	colour picker		
switch			Iwm2m client			
ο χζ change	🧳 udp in 🖓	Y yaml		form		
ti range	└ udpout 🥠	base64 p	lwm2m client	text abc		
<pre> template </pre>	~ input	📑 msgpack	 location 	gauge 🕥		
delay delay)) amgp in		turf			
trigger) amqp in	✓ storage		🧧 chart 🛛 🗹 🛉		
exec	()) amqp2 in ()	o file o	o worldmap	audio out 🛜		
z zip) stomp in	file in	📀 worldmap in 🗖			
•# md5 •	~ output		tracks	onotification		
soap request	output	् २ watch 🖕	convex hull	🧧 ui control		
string	🖕 amqp out 🌒	ftp in	✓ time			
xml converter	ວິ amqp2 out 🛛 🔌	mysql		<pre>()</pre> /> template ()		
random	(stomp out)		sunrise 🔾			
o 🗊 🛛 rbe 🕞	···· / /	L tail 🤤	Snap4City	(C), February 2024		






Node-RED Basic Blocks

It is provided with **a minimum set** of functionalities (the building blocks/nodes) while other blocks can be easily added loading them from a **large library** made available by the **JS Foundation**.

Despite to its diffusion, for the usage in the context of Smart City it was **not powerful** to cope with the **basic requirements** of the domain.


The classical nodes provided in the standard version can be classified as: input, output, function, social, storage, analysis, advanced, and dashboard.

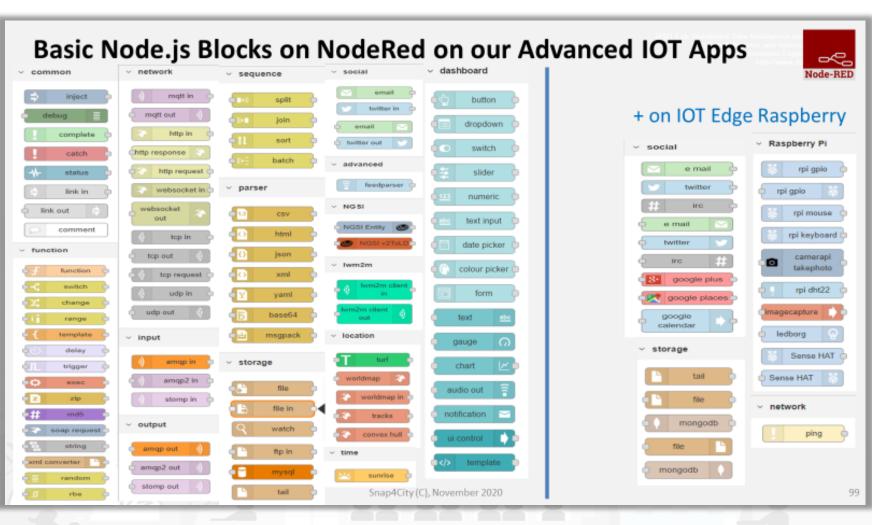



- **Data ingestion**: more than 70 protocols IOT and Industry 4.0, web Scraping, external services, any protocol database, etc.
- **Data access**: save/retrieve data, query search on expert system, georeverse solution, search on expert system Km4City ontology, etc.
- Data Transformation/transcoding: binary, hexadecimal, XML, JSON, String, any format
- Integration: CKAN, Web Scraping, FTP, Copernicus satellite, Twitter Vigilance, Workflow OpenMaint, Digital Twin BIMServer, any external service REST Call, etc.
- Manipulation of complex data: heatmaps, scenarios, typical time trend, multi series, calendar, maps, etc.
- Access to Smart City Entities and exploitation of Smart City Services: transport, parking, POI, KPI, personal data, scenarios, etc.
- **Data Analytic**: managing Python native, calling and scheduling Python/Rstudio containers as snap4city microservices (predictions, anomaly detection, statistics, etc.)
- User interaction on Dashboard: get data and message from the user interface, providing messages to the user (form, buttons, switches, animations, selector, maps, etc.)
- **Custom Widgets**: SVG, synoptics, animations, dynamic pins on maps, etc
- Event management: Telegram, Twitter, Facebook, SMS, WhatsApp, CAP, etc.
- Hardware Specific Devices: Raspberry Pi, Android, Philips, video wall management, etc.



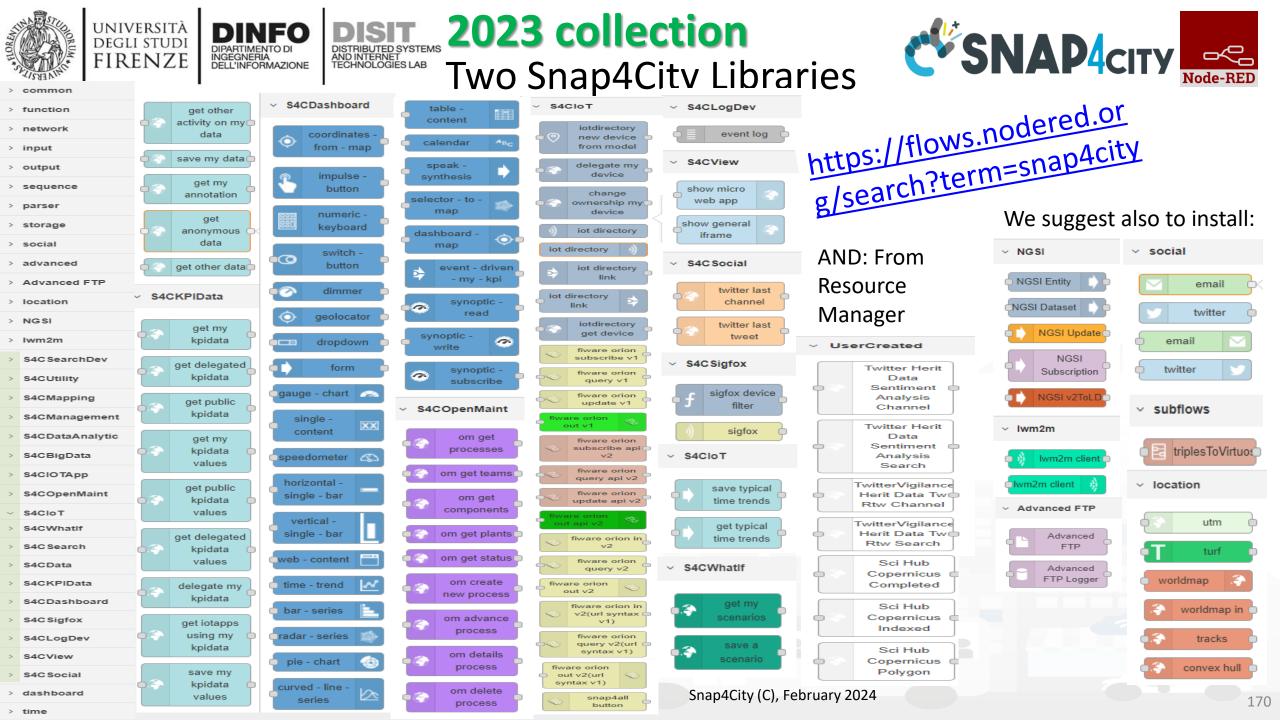

Snap4City





Resource Manager: public and sharing

View Resources Snap4City User: roottooladmin1, Org: DISIT Role: RootAdmin, Level: 7 Pages: Prev 1 2 3 ... 12 Next Q× dev Oashboards 4 My Dashboards IoTApp (118) Florence_Pharmacies_CSV.zip DeveloperDash-V3-1523555417880 node-red-contrib-snap4city-developer.rar Notificator ETL (53) MicroService (8) O IOT Applications AMMA (4) My Personal Data R (3) IOT Directory and Devices DevDash (2) Dev Dashboard 📜 Knowledge and Maps 🔻 IoTBlocks (2) developer1: Public developer1: Public snap4city: Private snap4city: Private 📁 Micro Applications Username: developer1 Username: developer1 Username: snap4city Username: snap4city **Resource type: ETL** Resource type: DevDash Resource type: IoTBlocks **Resource type: ETL** 🏛 External Services 🔻 Nature: data category (ie: geolocat... Nature: geolocated Nature: sensors Nature: data category (ie: geolocat... 🖨 Data Set Manager: Data Gate Description: Florence Pharmacies o... Description: Smart bench Description: Snap4city Developer D... Description: Snap4city NodeRed Li... **** **** **** **** < Resource Manager: Process Loader 🔺 View Edit Unpublish Owner View Edit Unpublish Owner View Edit Publish Owner View Edit Publish Owner View Resources Anaging Resources AMMADashSnap4City-30minview-v2-152... PaoloApplication.json Developer Dashboard New-1526308876256 ResDash Docker-1526308998809 MicroServices for IOT Applications Process Models Processes in Execution Process execution Archive 🙆 Development Tools 🔻 Application Dev Dashboard AMMA Tool Res Dashboard 🗞 Management 🔻 developer]: Private developer1: Private developer1: Private developer1: Private 📽 Settinas 🔻 Username: developer1 Username: developer1 Username: developer1 Username: developer1 🍟 User Management and Auditing 🔻 Resource type: IoTApp Resource type: AMMA Resource type: DevDash Resource type: ResDash Nature: data category (ie: geolocat... Nature: ToBeDefined Nature: ToBeDefined Nature: ToBeDefined Help and Contacts 🔻 Description: NodeRed Flow Shared ... Description: AMMA snap4city dash... Description: Developer Dashboard ... Description: Resource Dashboard: ... **** **** **** **** Documentation and Articles View Edit Publish Owner View Edit Publish Owner View Edit Publish Owner View Edit Publish Owner 💄 My Profile 🔻

Snap4City portal

UNIVERSITÀ

DEGLI STUDI

FIRENZE


DINFO

INGEGNERIA DELL'INFORMAZIONE DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB





search vs services, the ServiceURI

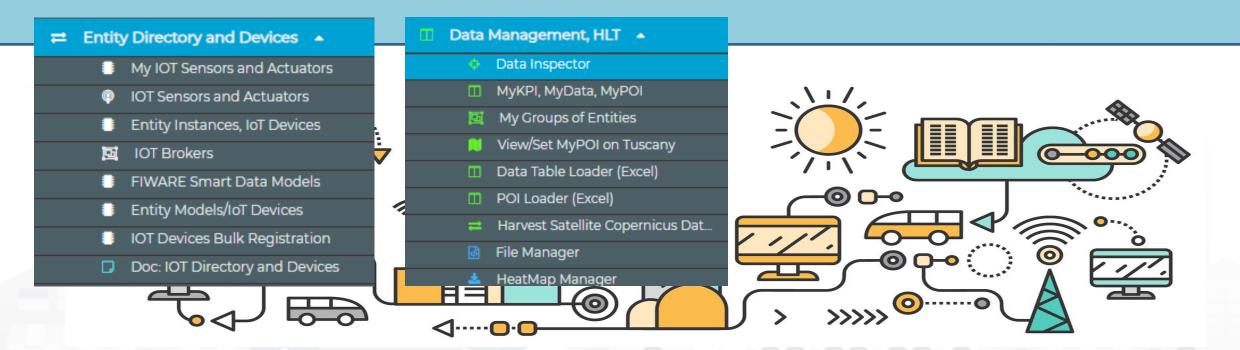

Snap4City (C), February 2024





Snap4City User: roottooladmin1, Org: DISIT

Role: RootAdmin, Level: 7

My Snap4City.org Tour Again

Dashboards (Public)
My Dashboards in All Org.

Dashboards of My Organization My Dashboards in My Organization My Data Dashboard Dev Kibana

My Data Dashboard Kibana
 Extra Dashboard Widgets

Data, my Data, OpenData

 Knowledge and Maps

IOT Sensors and Actuators
 IOT Devices
 IOT Devices Management
 IOT Device Discovery.

IOT Orion Broker Mapping Rules
 Doc: IOT Directory and Devices
 Create an IOT Device Instance
 Create an IOT Device Model
 Add an IOT Device into Snap4Cit

tps://log.disit.org/service/?sparql=http://servicemap.di

IOT Applications ▼
 IOT Directory and Devices ▲
 My IOT Sensors and Actuators

IOT Brokers
 IOT Device Models
 IOT Devices Bulk Registration
 IOT Broker Periodic Update settir

Resource Manager 🛛 🔻

Notificator





- For: IOT Devices, Sensors, Sensor mobile, Actuators, Virtual Sensors, etc.
- Accessible as
 - ServiceURI
 - Device URI

			IC	OT Devices						
Show	✓ entries			•				Search		w Devic
	Device Identifier	IOT Broker	Device Type	¢ Model ∣	Ownership	🔶 Status	L\$ Edit	Delete	Location	Vie
8	15EP22T2AA1S000022	orionFirenze-UNIFI	ChargingStation	ChargingStationModel	PUBLIC	active	EDIT	DELETE	0	VIEW
8	AccessPoint1_FamilaSuperstore	orionLonatoDelGarda-UNIFI	AccessPointSensor	AccessPointLonato	DELEGATED	active	EDIT	DELETE	()	VIEW
0	AccessPoint2_ITIS	orionLonatoDelGarda-UNIFI	AccessPointSensor	AccessPointLonato	DELEGATED	active	EDIT	DELETE	()	VIEW
0	AccessPoint3_Palasport	orionLonatoDelGarda-UNIFI	AccessPointSensor	AccessPointLonato	DELEGATED	active	EDIT	DELETE	()	VIEW
8	adminDevl	orionUNIFI	Ambiental		MYOWNPUBLIC	active	EDIT	DELETE	()	VIEW
۰	AdminDevice001	orionUNIFI	Ambiental		MYOWNPRIVATE	active	EDIT	DELETE	(VIEW
De Pro Mo Loi De Ori K1:	nd: sensor svice Type: Ambiental otocol: ngsi odel: ngitude: 9.228193 svice Uri:" http://www.disit.org/km4ci ganization: DISIT whosh Nasy I : b7c4c115-f25c-4cb6-95eb-e4b36322		nDevice001	Visibility: MyOwn Format: json MAC: Producer: Raspbr Latitude: 45.4993 PMLOAD NGS 12 K2: 441ffb6c-dc8a	erry Pl	5f5		N	VIEW IN SERV EW DATA IN AdminD	
	eated on: 2018-05-24 21:54:03						_		•	
8	AdminDevice002	orionUNIF	Ambiental		MYOWNPRIVATE	active	EDIT	DELETE	(VIEW
θ	Admindevice004	orionUNIFI	Ambiental		MYOWNPRIVATE	active	EDIT	DELETE	(VIEW
Θ	AdminDevice005	orionUNIFI	Ambiental		MYOWNPRIVATE	active	EDIT	DELETE	0	VIEW
0	AdminDevice]	orionUNIFI	Ambiental		MYOWNPRIVATE	active	EDIT	DELETE	()	VIEW
	ng 1 to 10 of 462 entries sparql&uri=http://www.disit.org/km4city/resour	ce/iot/orionUNIFI/Ac 001		Previo	us 1 2	3	4	5	47	Next


Device Uri: http://www.disit.org/km4city/resource/iot/orionUNIFI/AdminDevice001






Understanding / Testing an Entity/ IoT Device

Broker URI: https://broker1snap4city.org Broker Port: 8080 Kind: sensor Visibility: MyOwnPrivate Protocol: ngsi MAC: Producer: Raspberry PI Latitude: 45.499369 Device Uri: http://www.disit.org/km4cit/ ource/iot/orionUNIFI/AdminDevice001 Organization: DISIT Ource/iot/orionUNIFI/AdminDevice001 Protocosing WXCAN RSV2 Kt: b7ch N5-725c-4cb6-95eb-e4b363222bef Visibility: MyOwn Private See Payload NGSI The Broker V1 in JSON directly See Payload NGSI V1 in JSON directly From the Broker,	•	AdminDevice001	orionUNIFI	Ambiental		MYOWNPRIVATE	active	EDIT	DELETE	(VIEW
V1 in JSON directly V2 in JSON directly ServiceMap Create a Message to	Kin Dev Pro Mod Lon Dev Org RA	d: sensor vice Type: Ambiental otocol: ngsi idel: ngitude: 9.228193 vice Uri: <u>" http://www.disit.org/km4ci</u> ganization: DISIT vICAD NGSIVI b7c4 115-f25c-4cb6-95eb-e4b36322	ty, source/iot/orionUNIFI/Admir	Device001	Visibility: MyO Format: json MAC: Producer: Ras Latitude: 45.49	wnPrivate pberry Pl 99369	5f5				
		·	The Broker	V2 in JS	ON directly			C		-	

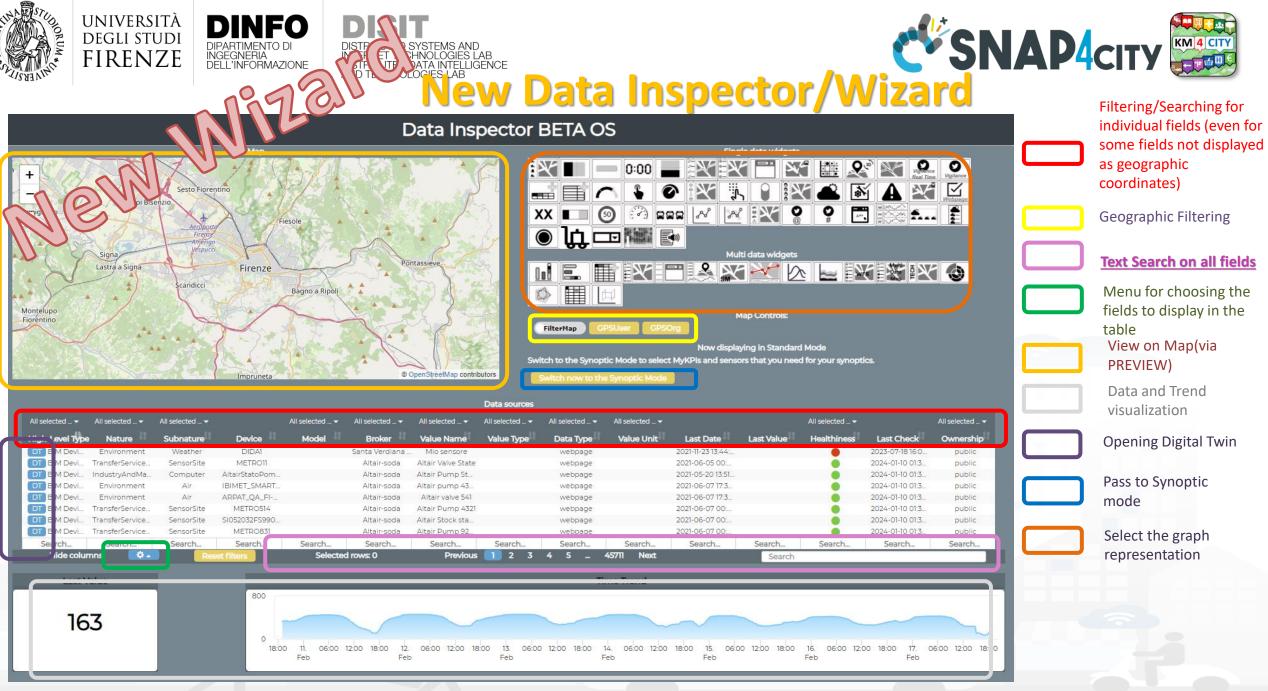

Snap4City (C), February 2024

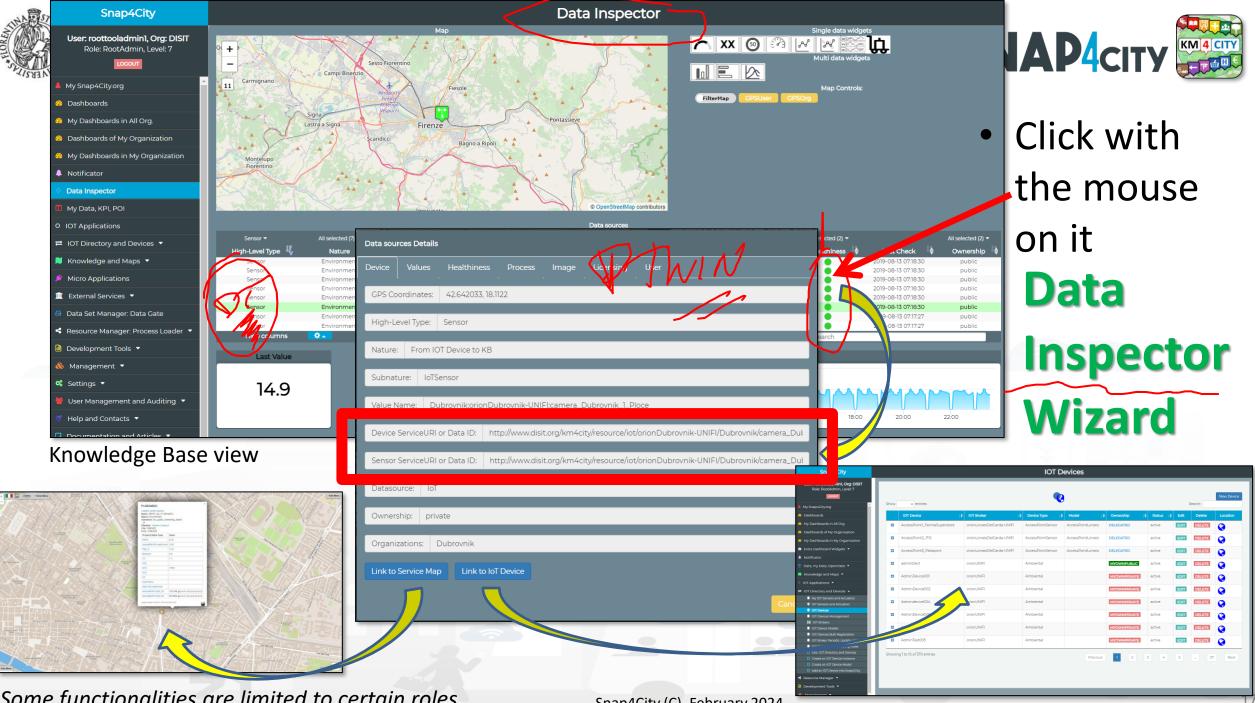

Some functionalities are limited to certain roles





Notation Terminology

WHERE	Are synonymous at level of service which can be IoT device or entity with data and references to	Are synonymous at level of the single attribute of the entity, device, service, etc.
IoT Directory, Entity Directory	IoT Device, Entity Instance, Device URI	Sensor, Actuator, Attributes, Values (value name)
Knowledge Base, ServiceMap, SmartCity API, ASCAPI	Service, ServiceURI, SURI	Attribute, Metric
DataInspector, Wizard, Dashboard	Value Name	Sensor, Sensor Actuator, ValueType
IoT App., Proc.Logic, Node-RED	ServiceURI, SURI	SURI and its real time results of the objects into the data structure

ServiceURI, SURI of a sensor device:

- <u>http://www.disit.org/km4city/resource/METRO759</u>
- <u>http://www.disit.org/km4city/resource/iot/orionCAPELON-UNIFI/CAPELON/Streetlight%3A90FD9FFFEBD5A7F</u> ServiceURI, SURI extended with attribute/variable/value:
- http://www.disit.org/km4city/resource/METRO759&metric=vehicleFlow
- http%3A%2F%2Fwww.disit.org%2Fkm4city%2Fresource%2FMETRO759&metric=vehicleFlow
- In some cases
 - <u>http://www.disit.org/km4city/resource/METRO759/vehicleFlow</u>














Dashboard Usage and recipe: Event map target

- Selector to Show on Map a
 - category of Map positioned elements
 - https://servicemap.disit.org/WebAppGrafo/api/v1/?selection=43.08694333811321;8.791809082031252;4 .93 8500391093;14.065246582031252&cate gories=Traffic sensor&maxResults=0&maxDists=0.1&text=&model=&value type=&format=json
 - https://servicemap.disit.org/WebAppGrafo/api/v1/?queryId=e5f39066cd68ffe259ed8877bcee222b&format=jsc
 - **Entity by Model**
 - https://www.disit.org/superservicemap/api/v1?selection=59.36535064975547;13.457822799682619;59.39031474260852;13.561999435424806&model= SmartLightCapelon&format=ison
 - **Single Entity**
 - https://servicemap.disit.org/WebAppGrafo/api/v1/?serviceUri=http://www.disit.org/km4city/resource/iot/orionFirenze2/Firenze/SH2Cac_new&format= ison&fromTime=3-day
 - Heatmap among many
 - https://wmsserver.snap4city.org/geoserver/Snap4City/wms?service=WMS&layers=Florence PM10
 - **Traffic flow**
 - https://wmsserver.snap4city.org/geoserver/Snap4City/wms?service=WMS&layers=FirenzeFIPILITrafficRealtime&trafficflowmanager=true
 - https://firenzetraffic.km4city.org/trafficRTDetails/roads/read.php
 - **Origin Destination Map**
 - https://odmm.snap4city.org/api/get?precision=communes&from date=&organization=Toscana&inflow=True&longitude=11.255751&latitude=43.769710 &od id=mobile Toscana 1000&perc=True
- Events which are also PIN on map
- Il Service URI as the unique identifier of the Entity ٠
 - http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/METRO632



Data Registration Flow at a Glance

Service Map (Tos

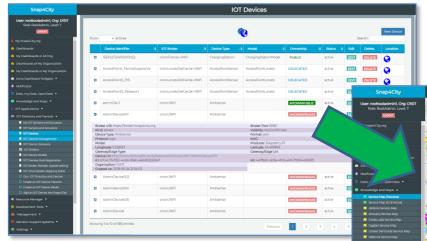

DINFO

INGEGNERIA DELL'INFORMAZIONE

DIPARTIMENTO DI

DISTRIBUTED SYSTE AND INTERNET TECHNOLOGIES LAB

IOT Directory: Devices... Sensors.. Actuators...

UNIVERSITÀ Degli studi

FIRENZE

Knowledge Base, ServiceMap, SuperServiceMap SmartCity API, ASCAPI









Part 3 Part 5



MyKPI Nodes









Node-BED

- S4CKPIData
- get my kpidata get my kpidata • values get public kpidata values get delegated kpidata values save my kpidata

values

Access to MyKPI and to those that other user have delegated to Me

• Save and retrieve MyKPI into the safe personal data

MyKPI are:

storage

- Time series of data with GPS coordinates that can chage over time
- Suitable for: moving sensors, trajectories, data from OBU, data from mobile, sensor data (if needed), etc. etc.
- MyPOI are:
 - POI with full metadata description and static coordinates



TOOLS forPart 3Data Ingestion VerificationsPart 5

UNIVERSITÀ

degli studi FIRENZE

TOP

AND INTERNET TECHNOLOGIES LAF








Knowledge base Semantic reasoners

- All searches
- Metata
- Structure
- Last values of IoT Dev
- GTFS
- Only public IoT Dev

Indexing and aggregating NIFI, OpenSearch

- Faceted search
- Geo search
- Time Series
- Private and Public

- ServiceMap, SCAPI, SuperSM
 - LOG / LOD viewer
 - Super Service Map
 - SCAPI: Swagger
 - Last data
- Data Inspector (last data)
- IoT/Entity Directory
 - IoT Brokers
- ServiceMap, SCAPI (last data), SuperSM
- My Data Dashboard, OpenSearchDash
 - Data Inspector (last data)

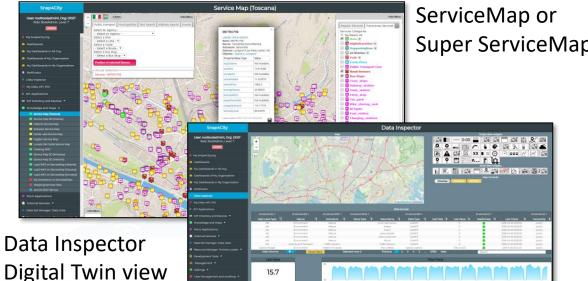



My Data Dashboard

<mark>DevDash</mark>

Some functionalities are limited to certain roles













ServiceMaps/Super ServiceMap

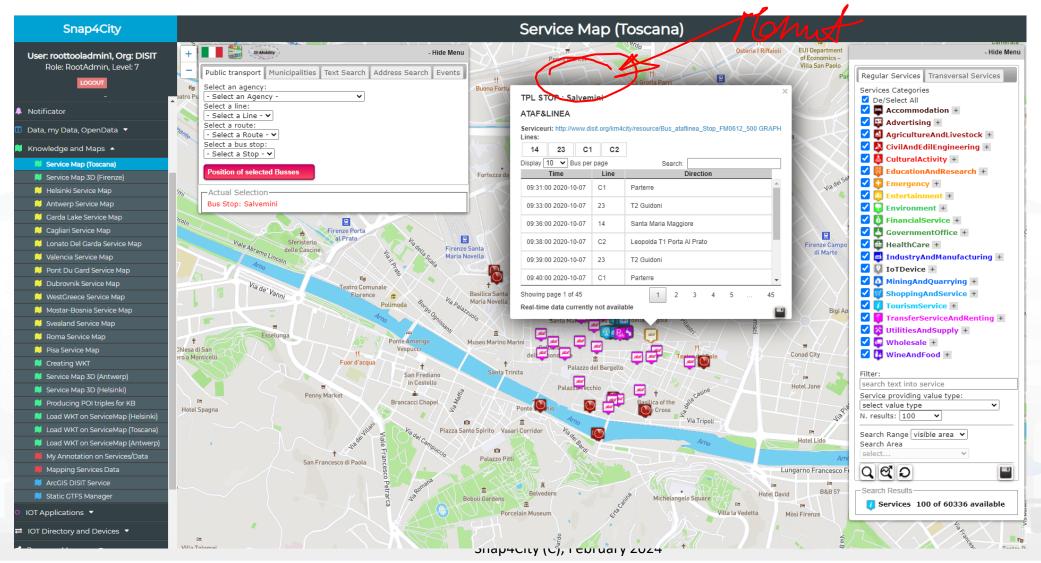


185





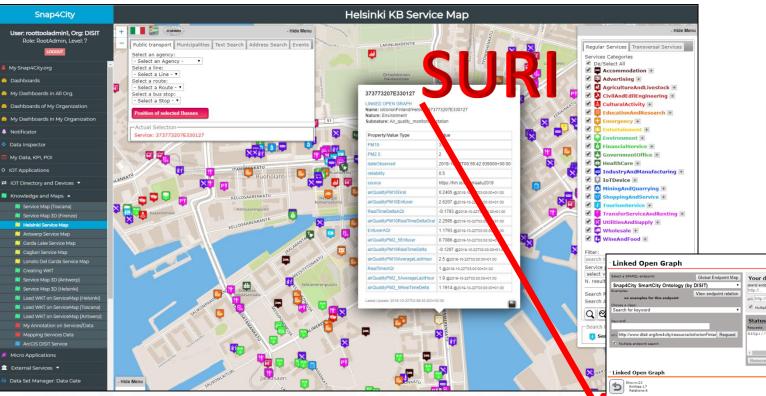

 How pass from ServiceMap to Linked Open Graph, Linked Data view tool

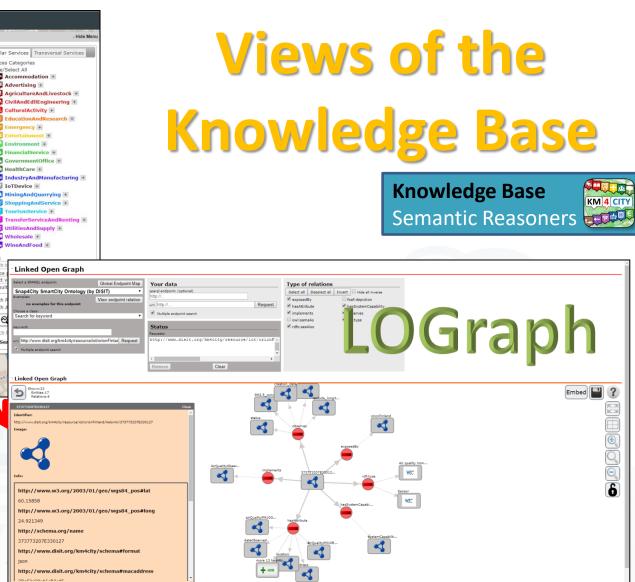



KM 4 CITY





Linked Open Data

LOG: <u>https://log.disit.org</u>

· Linked Open Graph		· · · · · · · · · · · · · · · · · · ·
SiiMobility (by DISIT) Examples: . VIA GIACOMO MATTEOTTI . Bagno a ripoli . Florence Choose a class: Search for keyword v	Your data sparql endpoint: (optional) http:// uri: http:// Request Status Requests: http://www.disit.dinfo.unifi.it/SiiMobility/MUSE •	Type of relations Select all Deselect all Invert Hide all inverse belongTo coincideWith contains depiction ends forming has hasAccess hasExternalAccess hasMunicipality hasStreetNumber inMunicipalityOf isIn isPartOf isPartOfProvince isPartOfRegion managingAuthority ownerAuthority
* Linked Open Graph	Remove Clear	 ✓ placedIn ✓ sameAs ✓ seeAlso ✓ starts
PISTOIA PISTOIA PISTOIA PISTOIA type hasMunicipality	coincideWith	NPe hasExternalAcce type based in placed in based in base
ownerAuthority managingAuthori managingAuthori managingAuthori	inMunicipalityO type type ty ty ty ty ty ty ty ty ty ty	04801723494ES type placedIn placedIn Relations of Museo Ferragamo with the road graph
chema: <u>http://www.disit.org/km4city/</u>		forming
DF version: <u>http://www.disit.org/km4</u>	city.rdf	











Snap4City



Role: AreaManager, Level: 3

LOGOUT


- www.snap4solutions.org
- Oashboards (Public)
- Oashboards of My Organization
- My Dashboards in My Organization
- My Data Dashboard Dev Kibana
- 🚯 🛛 Extra Dashboard Widgets 🔻
- 🔟 🛛 Data Management, HLT 🔺
 - Data Inspector
 - MyKPI, MyData, MyPOI
 - 📴 My Groups of Entities
 - View/Set MyPOI on Tuscany
 - Data Table Loader (Excel)
 - POI Loader (Excel)
 - ≓ Harvest Satellite Copernicus Data
 - File Manager
 - 📥 HeatMap Manager
 - **BIM Server old**
 - BIM Server New
 - BIM Srv New: Add
 - BIM Srv new: View
 - 🖨 OpenData Manager: Data Gate
 - OpenData Manager: Data Gate
 - Add Data Sources into the Platform
 - Doc: Data Table Loader Doc: POI Loader

+ Prato. _ A11 11 cor Campi Bis cona Carmignano dat Lastra a Signa .

Agliana


Montelupo

	M	ар							
	ME	TRO72	9			×		F	كرر
	VALUE NA	AME: MET	RO729						
	DESCRIPTION D	ESCRIPTI	ON RT	ATA					
avyınne	/ 1.11040	value	4 hours	24 hours	7 days	•		1	5.
oncentration	9.503457	Last value	Last 4 hours	Last 24 hours	Last 7 days		J.	State of the second	
ngestionLevel	104.27637	Last value	Last 4 hours	Last 24 hours	Last 7 days	1	A.F	1	
ateObserved	2023-07- 29T08:56:00.000Z	Last value	Last 4 hours	Last 24 hours	Last 7 days			-	2
rehicleFlow	1356	Last value	Last 4 hours	Last 24 hours	Last 7 days	-	the	1	
					+		a lagar	3 4	
candicci	Part	agno a R	ipoli	and the second			ä	NE	20

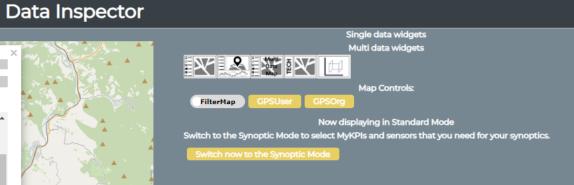

						Data	source	s									
All selected (24) 👻	All selected (48) 👻	All selected (895) 👻		All selected (11) 🔻		All selected (1595)		All selected (234)		All selected (48) 🔻		All selected (61) 🔻				All selected (3) 🔻	
High-Level Type	Nature 🕌	Subnature	Device/Mode#	Broker	l ê	Value Name	J ₽	Value Type	J₽	Data Type	l è	Value Unit	l ê	Last Date 🛓	Last Value	Healthiness	🔶 Last
IoT Device	TransferServiceAndRenting	Traffic_sensor	METRO792	orionUNIFI						sensor_map			20)23-07-28 13:26:00			2023-07
IoT Device	TransferServiceAndRenting	Traffic_sensor	METRO791	orionUNIFI						sensor_map			20	23-07-28 13:26:00		•	2023-07
IoT Device	TransferServiceAndRenting	Traffic_sensor	METRO793	orionUNIFI						sensor_map			20	023-07-28 13:16:00		•	2023-07
IoT Device	TransferServiceAndRenting	Traffic_sensor	METRO713	orionUNIFI						sensor_map			20	023-07-28 13:16:00		•	2023-07
IoT Device	TransferServiceAndRenting	Traffic_sensor	METRO729	orionUNIFI						sensor_map			20	023-07-28 13:16:00			2023-07
IoT Device	TransferServiceAndRenting	Traffic_sensor	METRO7	orionUNIFI						sensor_map			20	023-07-28 13:16:00		•	2023-07
IoT Device	TransferServiceAndRenting	Traffic_sensor	METRO760	orionUNIFI						sensor_map			20	023-07-28 13:16:00		•	2023-07
IoT Device	TransferServiceAndRenting	Traffic_sensor	METRO799	orionUNIFI						sensor_map			20	023-07-28 13:16:00		•	2023-07
•																	•
Hide colum	ns 🔯 🔺	Reset filters	Selected	rows:1		Previous 🚺	2	345.	262	2 Next			met	ro7			

© OpenStreetMap contributors



Snap4City (C), February 2024





Data Inspector for Beginner

- Browse and see models data via HLT, nature and Subnature
 - All the other faceted views, search and filter, filter by map, etc.
- Identify, click them to see
 - Remaining icons representing dashboard widgets which can be used in the Dashboard Wizard
 - ICON: Click on the icon on map and on value to preview data time serie if any
- See detailed Digital Twin data on the microbutton of the healthiness

Wider data preview is coming












DevDash: My Data Dashboard

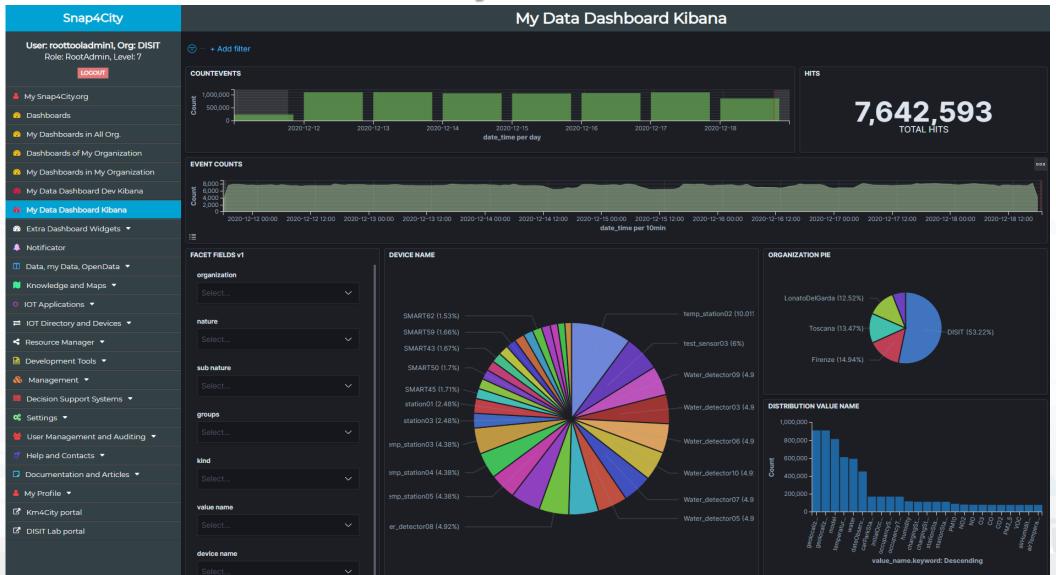





Data Managers









🔲 Data Management, HLT 🔺

- Oata Inspector
- MyKPI, MyData, MyPOI
- 🔟 My Groups of Entities
- 👏 View/Set MyPOI on Tuscany
- 🔲 Data Table Loader (Excel)
- POI Loader (Excel)
- ≓ Harvest Satellite Copernicus Dat..
- Data Inspector OpenSearch
- File Manager
- 🛓 🛛 HeatMap Manager
- 📥 ColorMap Manager
- TypicalTimeTrend Manager
- 🚔 🛛 TrafficFlow Manager
- TVCam Manager
- 📥 OD Manager
- BIM Manager
- BIM Server old
- BIM Server New
- BIM Srv New: Add
- BIM Srv new: View
- 🖴 🛛 OpenData Manager: Data Gate
- 😑 🛛 OpenData Manager: Data Gate
- ≓ 🛛 OpenData Harvester: Data Gate..

Data Managers

- Data Inspector
- MyKPI....
- File Manager
- HeatMap Manager
- Typical Time Trend Manager
- TV Cam Manager
- OD, Origin Destination Matrix Manager
- Bim Manager
- Open Data Manager









HeatMap Manager

Snap4City				He	eatMap	Manage	er				
Switch To New Layout (Beta)	Show 15 V							Searc	h:		
User: roottooladmin1, Org: DISIT	Map name	Color Map	Owner	Nature	Subnature	Organization	Details	Management	View Data	Delete	
Role: RootAdmin, Level: 7	15MinIndex_AbitantiPerPunto	VIEW EDIT 15minsubindex	VIEW	CulturalActivity	Cultural_centre	DISIT	VIEW	EDIT	VIEW	DEL	
									PREVIEW	_	
My Snap4City.org	15MinIndex_AverageIndex	VIEW EDIT 15minsubindex	VIEW			DISIT	VIEW	EDIT	VIEW PREVIEW	DEL	
Tour Again	15MinIndex_AverageIndexBologna	VIEW EDIT 15minsubindex	VIEW			DISIT	VIEW	EDIT	VIEW	DEL	
www.snap4solutions.org	ISMININGER_AVERAGEINGERBOIOGNA	VIEW EDIT ISminsubindex	VIEW			Distr	VIEW	EDIT	PREVIEW	DEL	
ダッシュポード	15MinIndex_CityIndexMP1	VIEW EDIT 15minsubindex	VIEW			DISIT	VIEW	EDIT	VIEW	DEL	
Dashboards (Public)									HeatMap Mai	nager	
My Dashboards in All Org.	15MinIndex_CultureAndCultsIndex	VIEW EDIT 15minsubindex	VIEW		Sho	Preview Hea	atmap				-
Dashboards of My Organization			_		150	lininder_Acitant:Par					
My Dashboards in My Organization	15MinIndex_CultureAndCultsIndexBologna	VIEW EDIT 15minsubindex	VIEW		154	linindex_AverageInd		Sant'Ippearo	Alla	- Carola	* 15Minlin Heatmap Controls:
My Data Dashboard Dev Kibana	15MinIndex_EconomyIndex	VIEW EDIT 15minsubindex	VIEW		151	finindex_AverageInd	Darba Ferra Vigno	tea de Casale Vergaio Tobbiana	Prato	- /	Max Opacity: (20
My Data Dashboard Kibana					154	dinindex_CityIndexMI	Calecatice Cime		Le Battle	Calenzario	
Extra Dashboard Widgets 🔻	15MinIndex_EconomyIndexBologna	VIEW EDIT 15minsubindex	VIEW		354	linindes_CutureAnd	Quarrata , hi	Catena Tantia	Paperino San dangjo	SetUrnello Querceto	100
					154	-Inindex_Economytric		Seano Puppetta	Santa Maria Compi Bisenzio	Sesto Florențino Ounto	Basso Segurite
Notificator	15MinIndex_EducationIndex	VIEW EDIT 15minsubindex	VIEW		33.0		bitants	Carmignano [®] Peggio a Calano [®]	San Marine Sittle	Osmannøro Sur soura	A
Data Management, HLT	15MinIndex_EducationIndexBologna	VIEW EDIT 15minsubindex	VIEW		154	Inindex_Educationin # of per of	sity inhabitants area	Ne Cristina Wetzana		Quaracchi Venue	L
 Data Inspector MyKPI, MyData, MyPOI 	lonnin dex_eddedon ndexbologna	Terre EDIT Terrinsubindex	VIEW		15.4	dinindex_Educationin	0 - 10 10 - 50 10 - 100		Signa Hada a Settor	Manterano	otto
My Groups of Entities	15MinIndex_EntertainmentSocialIndex	VIEW EDIT 15minsubindex	VIEW		154	dinindex_Entertainma 2	100 - 200 100 - 350 150 - 500 100 - 650			Casehea	Firenze
View/Set MyPOI on Tuscany					S.	6	100 - 850 150 - 800 100 - 950 1950	Sarryteratellt			
Data Table Loader (Excel) POL Loader (Excel)	15MinIndex_EntertainmentSocialIndexBologna	VIEW EDIT 15minsubindex	VIEW		0						Provident

Snap4City (C), February 2024









TrafficFlow Manager

Snap4City				Traffi	cFlow	Man	ager					
Switch To New Layout (Beta)	Show 15 V							S	earch:]
User: roottooladmin1, Org: DISIT Role: RootAdmin, Level: 7	Flux Name	Locality	Organization	Scenario	Instances	View Data	Metric	ColorMap	Delete	Preview	Unit of Measure	
	() cinuqe	nomedelloscenario	Toscana	cinuqe	3	VIEW	TrafficDensity	VIEW EDIT densityTrafficMap	DEL	PREVIEW	vehicle per 20m	
Data Management, HLT 🔺	FirenzeFIPILITrafficRealtime	FirenzeFIPILI	Toscana	TrafficRealtime	114241	VIEW	TrafficDensity	VIEW EDIT densityTrafficMap	DEL	PREVIEW	vehicle per 20m	
Data Inspector MyKPI, MyData, MyPOI	FirenzeFIPILITrafficScenarioScenario1before	FirenzeFIPILI	Toscana	Scenariolbefore	1	VIEW	TrafficDensity		DEL	PREVIEW	vehicle	
My Groups of Entities	0							densityTrafficMap	_		per 20m	
View/Set MyPOI on TuscanyData Table Loader (Excel)	FirenzeFIPILITrafficScenarioScenarioAFeb2020	FirenzeFIPILI	Toscana	ScenarioAFeb2020	14	VIEW	TrafficDensity	VIEW EDIT	DEL	PREVIEW Tra	vehicle	lanage
 POI Loader (Excel) Harvest Satellite Copernicus Data 	FirenzeFIPILITrafficScenarioScenarioAFeb2020TTT	FirenzeFIPILI	Toscana	ScenarioAFeb2020TTT	14	VIEW	15 V Preview	v Traffic flow				
 Data Inspector OpenSearch File Manager 	FirenzeFIPILITrafficScenarioScenarioANov2019	FirenzeFIPILI	Toscana	ScenarioANov2019	14	VIEW	Jame Jacob	- ternorite				
📥 HeatMap Manager	FirenzeFIPILITrafficScenarioScenarioANov2019TTT	FirenzeFIPILI	Toscana	ScenarioANov2019TTT	14	VIEW	mzeFIPILITrafficF	+ Fronz Amerika - Vespuco		Nuovo		
 ColorMap Manager TypicalTimeTrend Manager 			-		4	_	inzeFIPILITrafficS	10		Balker Hoghes		
TrafficFlow Manager TVCam Manager	FirenzeFIPILITrafficScenariostefano2	FirenzeFIPILI	Toscana	stefano2	4	VIEW	nzeFIPILITrafficS	Peretola	14		Rineda	
🛓 OD Manager	• FirenzeFIPILITrafficScenariostefano2TTT	FirenzeFIPILI	Toscana	stefano2TTT	4	VIEW	inzeFIPILITrafficS	Пателе мидлоне				
BIM Manager BIM Server old	FirenzeFIPILITrafficScenariostefano3	FirenzeFIPILI	Toscana	stefano3	7	VIEW	inzeFIPILITraffic5	urco Argingrosso				Firente Statuto
BIM Server NewBIM Srv New: Add	FirenzeFIPILITrafficScenariostefano3TTT	FirenzeFIPILI	Toscana	stefano3TTT	7	VIEW	nzeFIPILITrafficS	MELANER	Rarco delle Casane			
 BIM Srv new: View OpenData Manager: Data Gate 	FirenzeFIPILITrafficScenariostefano5	FirenzeFIPILI	Toscana	stefano5	8	VIEW	nzeFIPILITrafficS	0	Isolotto		Prensv Prata al Prato Str Ma Nov	ienze snite covella
 OpenData Manager: Data Gate OpenData Harvester: Data Gate 	FirenzeFIPILITrafficScenariostefano5TTT	FirenzeFIPILI	Toscana	stefano5TTT	8	VIEW	nzeFIPILITrafficS		444			
Add Data Sources into the PlatformDoc: Data Table Loader	EirenzeEIDII ITrafficScenariostefano6	FirenzeEIDII I	Toscana	stefano6	5		inzeFIPILITrafficS	and6T1T FirenzeFIPiLI	Toscana	stefano6111	5	VIEW TrafficDens

Snap4City (C), February 2024

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES






SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES






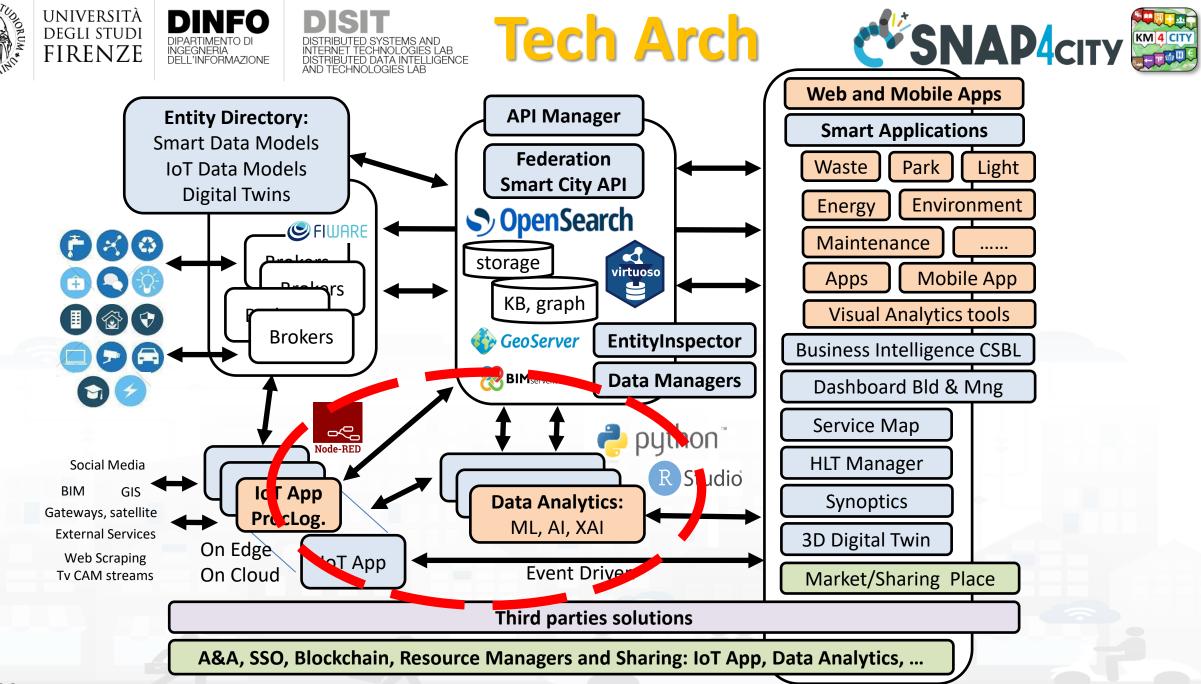





Development Life Cycle Smart Solutions

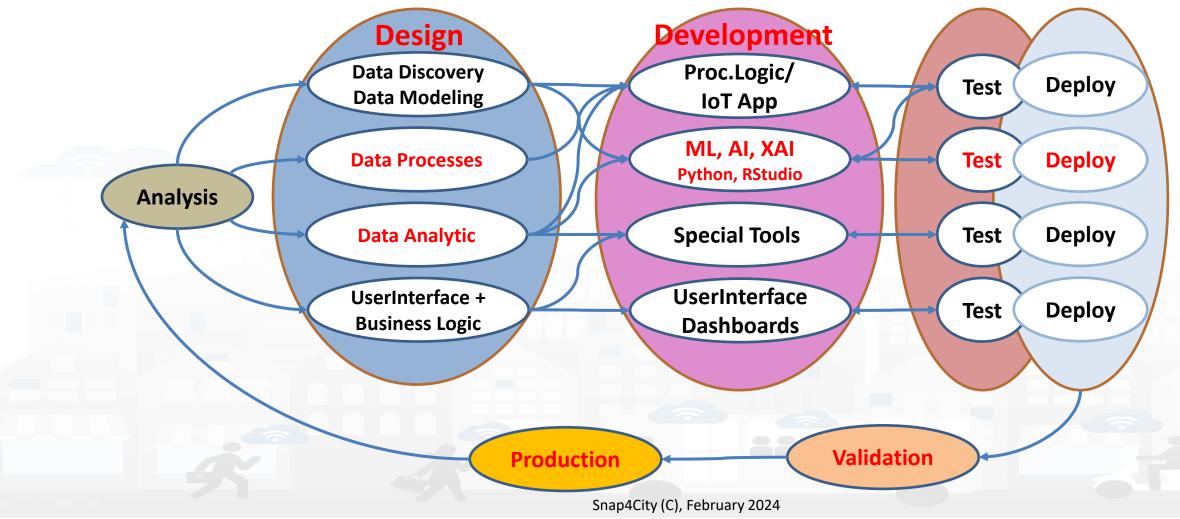



Developer in R Studio + Tensor Flow

Snap4City		R Studio Development	
	R File Edit Code View Plots Session Build Debug Profile	Tools Help snap4city [•
. 🥌 .	🔍 🔍 🔹 🖓 🧉 🖶 🔛 🚔 👘 🙆 🧄 Go to file/function	Project.	(None)
snap4city	Console Terminal ×	🔲 💽 AnomalyCetection R 🗴	-0
AreaManager Idap		🖌 😒 🗐 🔒 🖸 Source on Save Q, 🎢 🖡 📋	
Bashboards	<pre>[1] "carpark" Warning in statisticsResult[indfolder]\$statisticsOutputName = unb ("Predictions") :</pre>	110 anomaliesMatr[, "timestamp"] <- as.character(dataFinal[resSanomsSindex ,"alignDateTime"]) 111 anomaliesMatr[, "anoms"] <- as.numeric(resSanoms[,"anoms"]) 112	1
Notificator	number of items to replace is not a multiple of replacement len Warning in statisticsResult[indfolder]\$statisticsOutputName = unb	1 113 #table with anomalies 114	
0 IOT Applications	<pre>("MachineLearningPredictions") : number of items to replace is not a multiple of replacement len 'geom smooth() using method = 'loess'</pre>	<pre>115 setud(outhD) 1 116 options(digits = 1) 117 tBtable <- tableGrob(anomaliesMatr, rows = NULL, cols = c("Date and Time", "Anomaly"), theme=ttheme default(base</pre>	e size
IOT Directory and Devices	<pre>[1] "carpark" Warning in statisticsResult[indfolder]\$statisticsOutputName = unb</pre>	118 grid.draw(t8table) 119 h <- convertHeight(sum(t8table≸heights), "in", TRUE)	
Nowledge and Maps	<pre>("Anomalies") : number of items to replace is not a multiple of replacement len [1] "NO ANOMALIES ON THE SENSOR -CarParkBeccaria_free-"</pre>	122 plot <- res\$plot	
💋 Micro Applications	 "PRESENCE OF ANOMALIES ON THE SENSOR - CarParkCareggi_free-" "PRESENCE OF ANOMALIES ON THE SENSOR - CarParkPieracciniMeyer 	123 re 124 plotMix <- grid.arrange(plot, tBtable,	
External Services	e-" [1] "NO ANOMALIES ON THE SENSOR -CarParkS.Lorenzo free-"	$\begin{array}{c} 125 \\ 125 \\ 126 \\ 126 \\ 126 \\ 126 \\ 126 \\ 126 \\ 127 \\ 126 \\ 127 \\ 128 \\$	
🖨 Data Set Manager: Data Gate	 [1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneFirenzeS.M.Nfre [1] "carpark" 	' 127 as.table=TRUE)' 128 setwd(outwD)	
Resource Manager: Process Loader 💌	Warning in statisticsResult[indfolder]\$statisticsOutputName = unb ("Anomalies") : number of items to replace is not a multiple of replacement len	<pre>129 ggsave(paste(columnsHame[1],"Anomalies.png", sep=""), plothix, width=22, height=h=5) 130 131 - }, finally = {</pre>	
Development Tools 🔹	 "NO ANOMALIES ON THE SENSOR -CarParkBeccaria_free-" "PRESENCE OF ANOMALIES ON THE SENSOR - CarParkCareggi_free-" 	132 133 })	
🞄 Management 🔻	 "PRESENCE OF ANOMALIES ON THE SENSOR - CarParkPieracciniMeyer e-" 	<pre>135 statisticsResult[[indfolder]]\$resultFiles[[indResult]]\$sensor=unbox(as.character(columnsName[i]))</pre>	
🔊 Help and Contacts 💌	 "NO ANOMALIES ON THE SENSOR -CarParkS.Lorenzo_free-" "NO ANOMALIES ON THE SENSOR -CarParkStazioneFirenzeS.M.Nfree 		g", s(
 Help and Contacts Documentation and Articles 	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneFirenzeS.M.Nfre	137 indResult = indResult + 1	g", s(
	[1] "NO ANCHALIES ON THE SENSOR -CarParkStazioneFirenzeS.H.Nfre Files Plots Packages Help Viewer	 137 indResult = indResult + 1 138 139 1440 -)else(1440 -)else(141 print(paste("NO ANOMALIES ON THE SENSOR ", "-", columnsHame(1), "-", sep-"")) 	ξ", S(
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneFirenzeS.M.Nfre	<pre>137 indResult = indResult + 1 138 139 139 140 else(print(paste("NO ANOMALIES ON THE SENSOR ", "-", columnsName[1], "-", sep="")) 143 142 </pre>	g", S(
 Documentation and Articles 	(1) "NO ANOMALIES ON THE SENSOR -CarParkStazioneFirenzes.H.Nfre Files Plots Packages Help Viewer @New Folder 0 Upload 0 Delete Rename @More -	<pre>137 indResult = indResult + 1 138 139 140 +)else(141 print(paste("NO ANOMALIES ON THE SENSOR ", "-", columnsName[i], "-", sep="")) 143 144 }</pre>	g", 51
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneFirenzeS.M.Nfre Files Plots Packages Help Viewer @ New Folder ♥ Upload ♥ Delete @ Rename @ More - ♥ A Home	<pre>137 indResult = indResult + 1 138 139 140 141 print(paste("NO ANOWALIES ON THE SENSOR ", "-", columnsName[i], "-", sep-"")) 143 144 14 14 14 145 145 setud("~/Snap4City")</pre>	ζ", Sι
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneFirenzes.M.Nfree Files Plots Packages Help Viewer O New Folder O Upload O Delete Rename A Name Size Modified	<pre>137 indResult = indResult + 1 138 138 139 140 - }else(141 print(paste("ND ANOMALIES ON THE SENSOR ", "-", columnsName[i], "-", sep="")) 142 } 143 144 } 144 stud("~/Snap4City") 145 stud("~/Snap4City") 147 write(jsonlite::to)SON(statisticsResult[[1]]), "JsonStatisticsResult.json")</pre>	ζ", SI
Documentation and Articles My Profile	[1] "NO ANCHALIES ON THE SENSOR -CarParkStazioneFirenzes.M.Nfree Files Plots Packages Help Viewer Onewer Folder O Upload O Delete Rename Ame Size Notified nohup.out 72 8 Mar 30, 2018, 947	<pre>137 indResult = indResult + 1 138 138 139 140 - }else(141 print(paste("NO ANOMALIES ON THE SENSOR ", "-", columnsName[i], "-", sep-"")) 142 } 144 } 144 stud("~/Snap4City") 147 write(jsonlite::to)SON(statisticsResult[[1]]), "JsonStatisticsResult.json") 148 return(statisticsResult[[1]])</pre>	ζ", SI
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Aname Size Modified @ Snap4City @ Snap4CityDEMO	<pre>137 indResult = indResult + 1 138 139 140 141 print(paste("NO ANOWALIES ON THE SENSOR ", "-", columnsName[i], "-", sep-"")) 143 144 14 14 14 144 144 145 146 setud("~/Snap4City") 146 setud("~/Snap4City") 146 setud("*/Snap4City") 146 setud("*/</pre>	3", S(
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneErenzes.M.Nfree Files Plots Packages Help Viewer @ New Folder O Upload O Delete Rename More - @ New Folder O Upload O Delete Rename More - @ New Folder O upload O Delete Rename More - @ New Folder O upload O Delete Rename More - @ New Folder O upload O Delete Rename More - @ New Folder O upload O Delete Rename More - @ New Folder O upload O Delete Rename More - @ SapatClty SapatClty SapatClty SapatClty	<pre>137 indResult = indResult + 1 138 139 140 141 print(paste("NO ANOMALIES ON THE SENSOR ", "-", columnsName[i], "-", sep-"")) 143 144 144 144 144 144 144 144 144 144</pre>	
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Aname Size Modified @ Snap4City @ Snap4CityDEMO	<pre>indResult = indResult + 1 indResult = i</pre>	•
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Snap4City @ Snap4City @ Snap4CityDEMO	137 indResult = indResult + 1 138 138 139 140 141 print(paste("NO ANOVALIES ON THE SENSOR ", "-", columnsName[i], "-", sep="")) 142 141 143 144 144 141 145 setud("~/Snap4City") 146 return(statisticsResult[1])), "JsonStatisticsResult.json") 149 150 151 144 144 manh/Detection(anomal/Date) 2 144 monh/Detection(anomal/Date) 2 144 monh/Detection(anomal/Date) 2 154 monh/Detection(anomal/Date) 2 155 image: monh/Detection(anomal/Date) 2 1444 monh/Detection(anomal/Date) 2 145 monh/Detection(anomal/Date) 2 145 image: monh/Detection(anomal/Date) 2 145 image: monh/Detection(anomal/Date) 2 145 image: monh/Detection(anomal/Date) 2 145 image: monh/Detection(anomal/Date) 2 146 image: monh/Detection(anomal/Date) 2 147 image: monh/Detection(anomal/Date) 2 148 image: monh/Detection(anomal/Date) 2 1	₹ R Script ≎
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Snap4City @ Snap4City @ Snap4CityDEMO	<pre>indResult = indResult + 1 indResult = i</pre>	► C Script ≎ st - ©
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Snap4City @ Snap4City @ Snap4CityDEMO	<pre>137 indResult = indResult + 1 138 138 139 140 141 print(paste("NO ANOMALIES ON THE SENSOR ", "-", columnsName[i], "-", sep-"")) 141 142 143 144 144 144 144 144 144 144 144 144</pre>	t Script :
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Snap4City @ Snap4City @ Snap4CityDEMO	<pre>indResult = indResult + 1 indResult = i</pre>	► C Script ≎ st - ©
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Snap4City @ Snap4City @ Snap4CityDEMO	<pre>indResult = indResult + 1 indResult = i</pre>	▶ 2: Script : 5t - (C)
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Snap4City @ Snap4City @ Snap4CityDEMO	<pre>indResult = indResult + 1 indResult = indResult =</pre>	▶
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Snap4City @ Snap4City @ Snap4CityDEMO	<pre>indResult = indResult + 1 indResult indRe</pre>	▶ 2: Script : 5t - (C)
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Snap4City @ Snap4City @ Snap4CityDEMO	137 indResult + 1 indresult + 1 indresult + 1 138 139 jelse(indresult + 1 indresult + 1 141 print(paste("NO ANOMALIES ON THE SEMSOR ", "-", columnsName[1], "-", sep="")) jelse(142 print(paste("NO ANOMALIES ON THE SEMSOR ", "-", columnsName[1], "-", sep="")) jelse(143 jelse(indresult + 1 indresult + 1 144 print(paste("NO ANOMALIES ON THE SEMSOR ", "-", columnsName[1], "-", sep="")) jelse(143 jelse(indresult + 1 indresult + 1 144 jelse(jelse(indresult + 1 144 jelse(indresult + 1 indresult + 1 144 anoma/DetectorizeResult[[1])) "JoonStatisticsResult.json") 148 anoma/DetectorizeResult[[1])) "JoonStatisticsResult.json") 144 anoma/DetectorizeResult[[1])) "JoonStatisticsResult.json") 145 anoma/DetectorizeResult[[1]) "JoonStatisticsResult.json") 144 anoma/DetectorizeResult[[1]) "JoonStatisticsResult.json") 144 anoma/DetectorizeResult[[1]) "JoonStatisticsResult.json") 144 anoma/DetectorizeResult[[1]) Idotar	> > C Script :
Documentation and Articles My Profile	[1] "NO ANOMALIES ON THE SENSOR -CarParkStazioneEirenzes.M.N.,_free Files Plots Packages Help Viewer @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ New Tolder 0 Upload © Delete @ Remain @ More - @ Name Size Modified @ Snap4City @ Snap4City @ Snap4CityDEMO	<pre>indResult = indResult + 1 indResult indRe</pre>	▶

DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB


UNIVERSITÀ Degli studi


FIRENZE

DINFO


INGEGNERIA DELL'INFORMAZIONE

DIPARTIMENTO DI

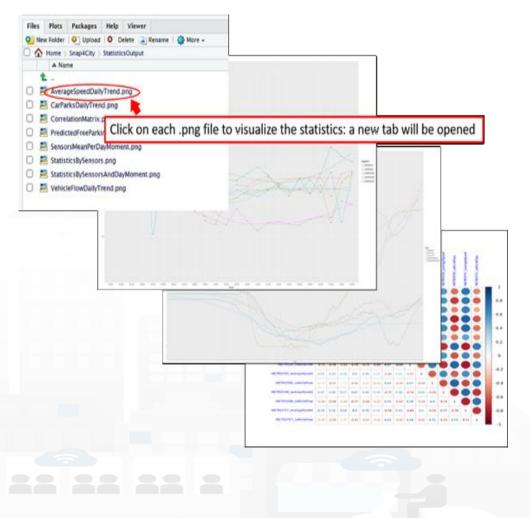

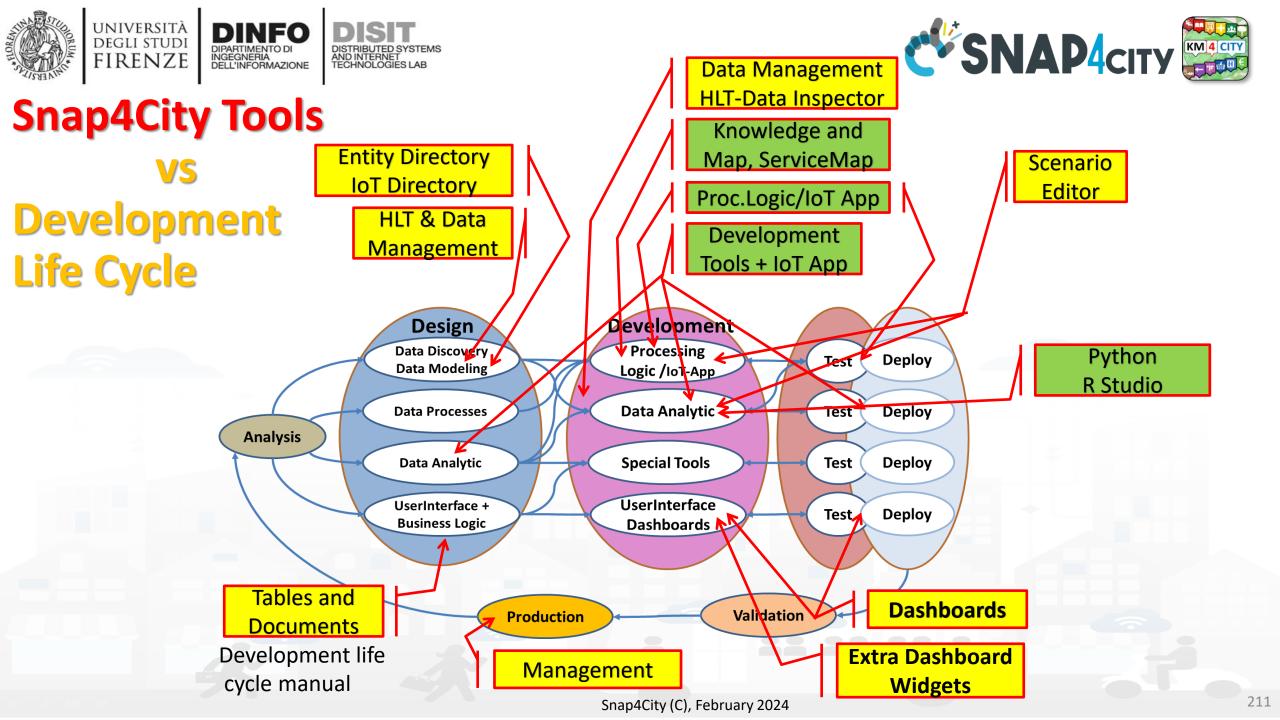








Model/Technique Development/testing

• Identification of Process goals and Planning

DINFO

INGEGNERIA DFI L'INFORMAZIONE

- Which goals
- How to compute, which language
- Which environment, which libraries
- Data Discovery and Ingestion (from the general life cycle)
- Data Analysis: feature engineering, feature selection
- Data review and preparation for the model
- Model Identification and building: ML, AI, etc....
 - Training
 - Tuning hyperparameters when possible
- Model Assessment and Selection
 - Validation in testing
 - Assessment on a set of metrics depending on the goals: global relevant and feature assessment
 - Assessing computational costs
 - Impact Assessment, Ethic Assessment and incidental findings
 - Global and Local Explanation via Explainable AI techniques
- Model Deploy and Final Validation
 - Optimisation of computation cost for features, if needed reiterate
- Solution on Production (security, scalability, etc.)

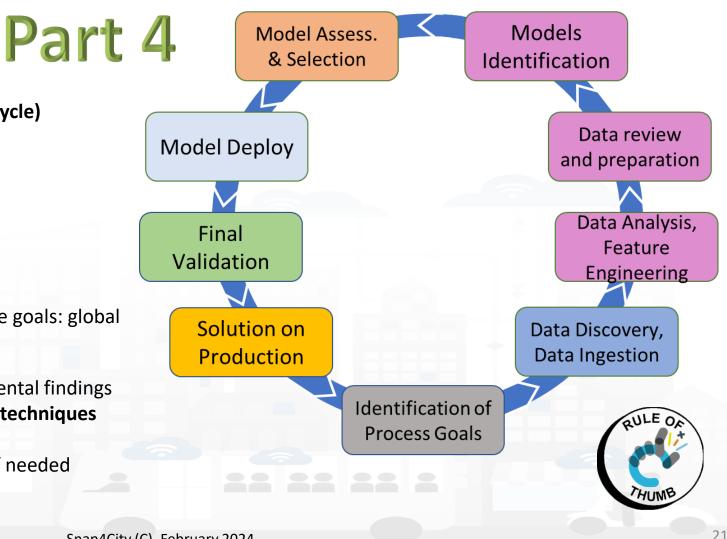



UNIVERSITÀ


degli studi FIRENZE

TOP



Scenario Editor: Snap4City Infrastructures




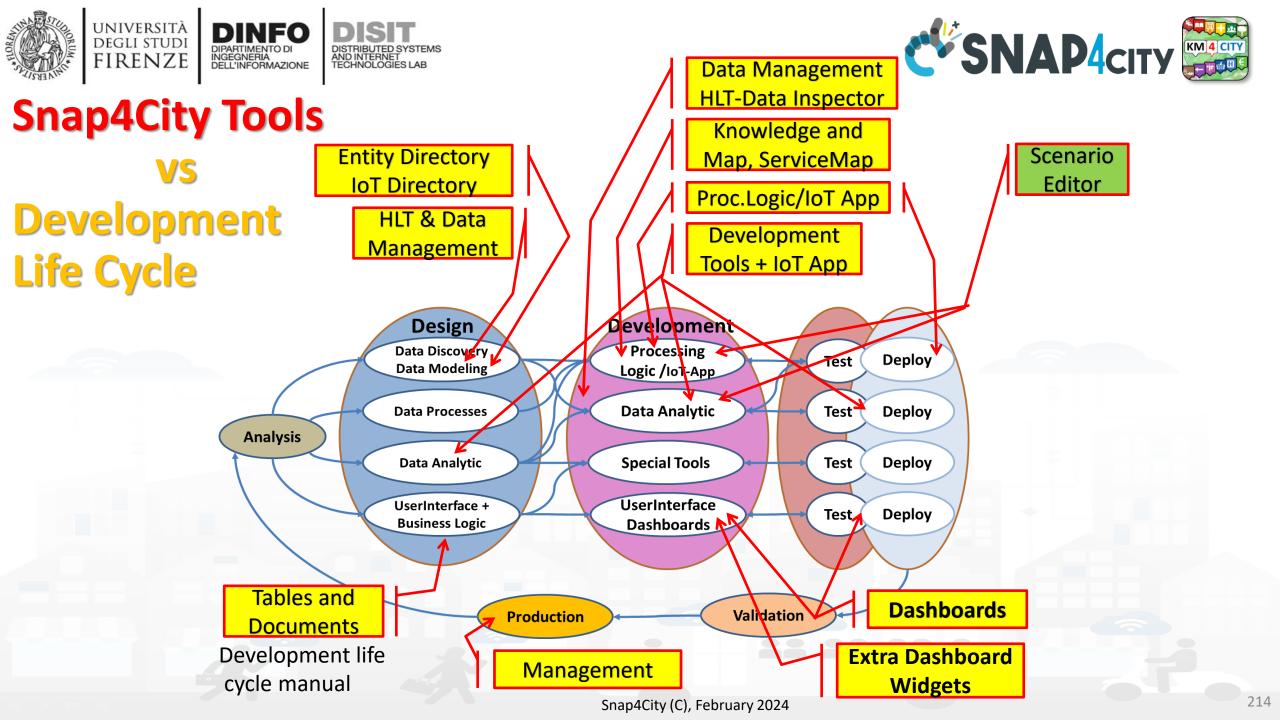








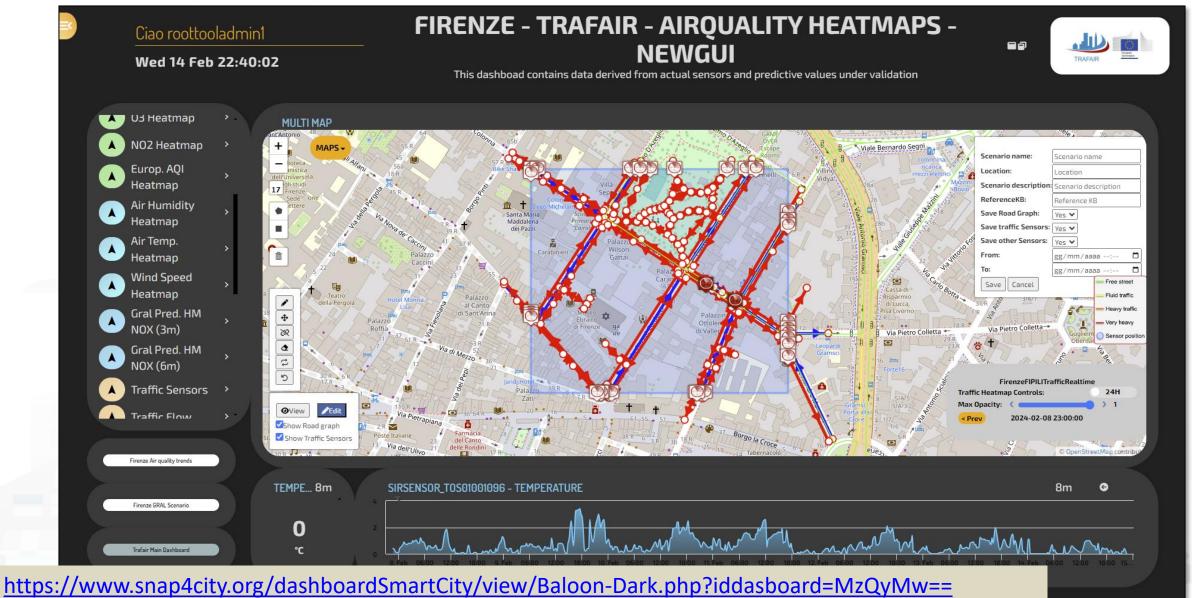

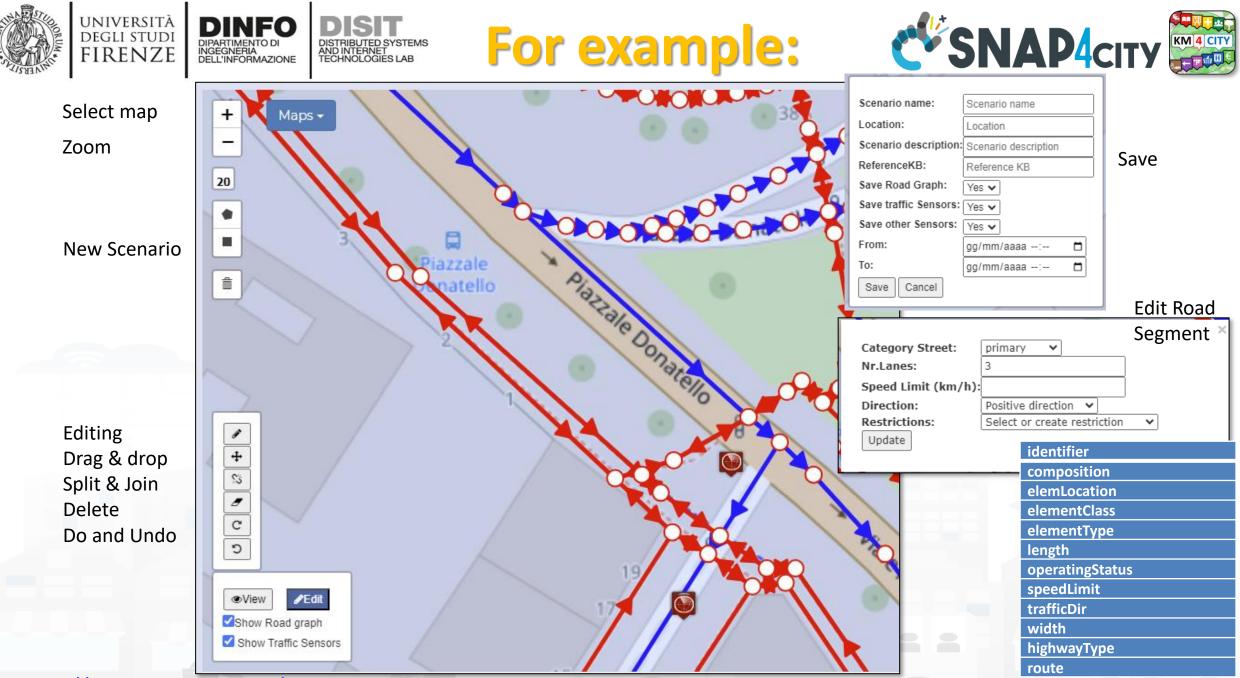

https://www.snap4city.org/976

Properties of Road Elements





The actual Scenario Exploitation





Defining Context via Editing Scenario:

- Select area and data
- Editing roads, POI, IoT entities, ..
- Save/load, share
- Change status



A Scenario includes:

Status and versions,

Road graphs, cycling,

List of data, sensors

Period of validity

pedestrian seg.

Metadata


date time

•

•

•

Etc.



Computing in the Scenario Context as:

- KPI, Metrics,
 SUMI, SUMP,
 15MinCity Index
- Heatmaps
- OD Matrices
- Traffic Flow reconstructions
- Predictions
- Routing, constrained routing
- Early Warnings
- Etc.

ReLoading Scenario in JavaScript

- Evolve Scenarios
- Use Scenario to context the Data Analytics: R Studio, Python for computing














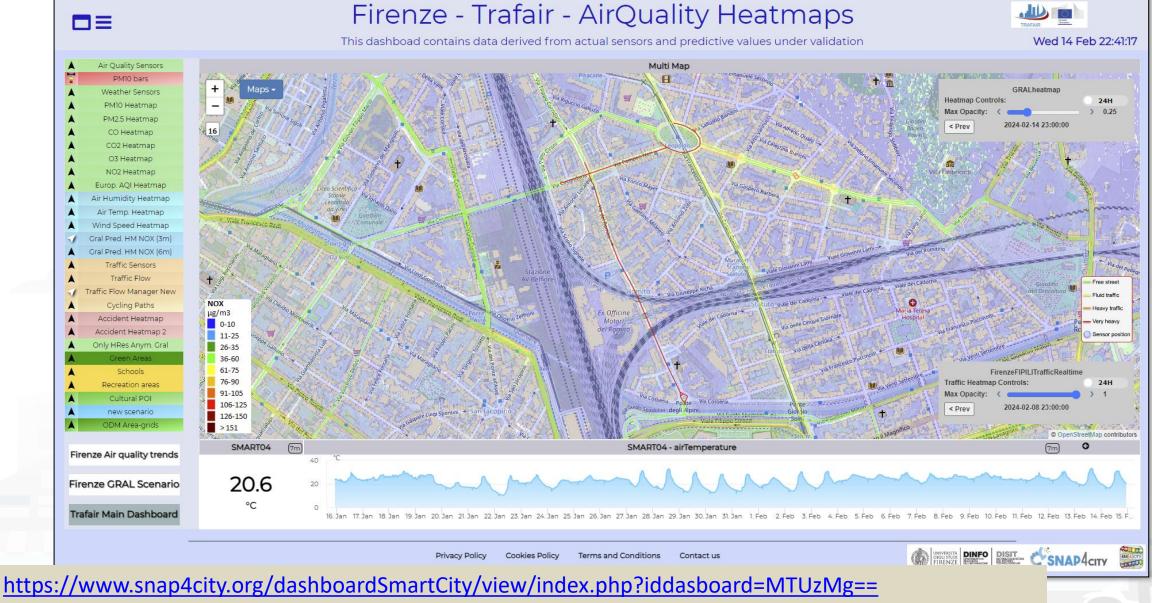






Data Analytics on Cloud: Snap4City Infrastructures




Data Analytics on Snap4City platform

TensorFlow

Swagger

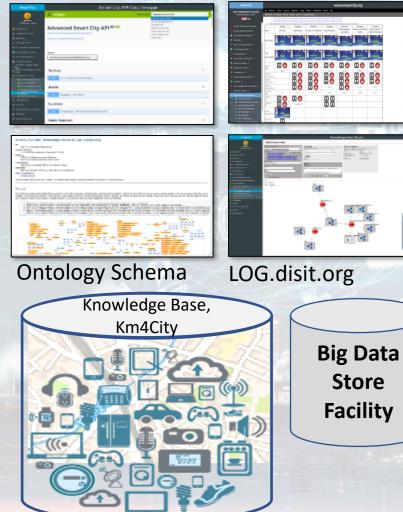

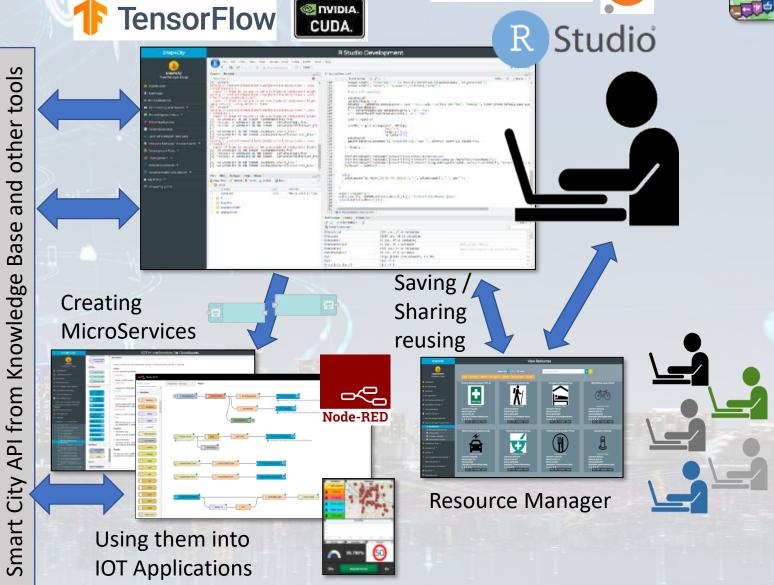



Snap4City (C), February 2024

SNAP4city

KM 4 CITY

epython jupyter

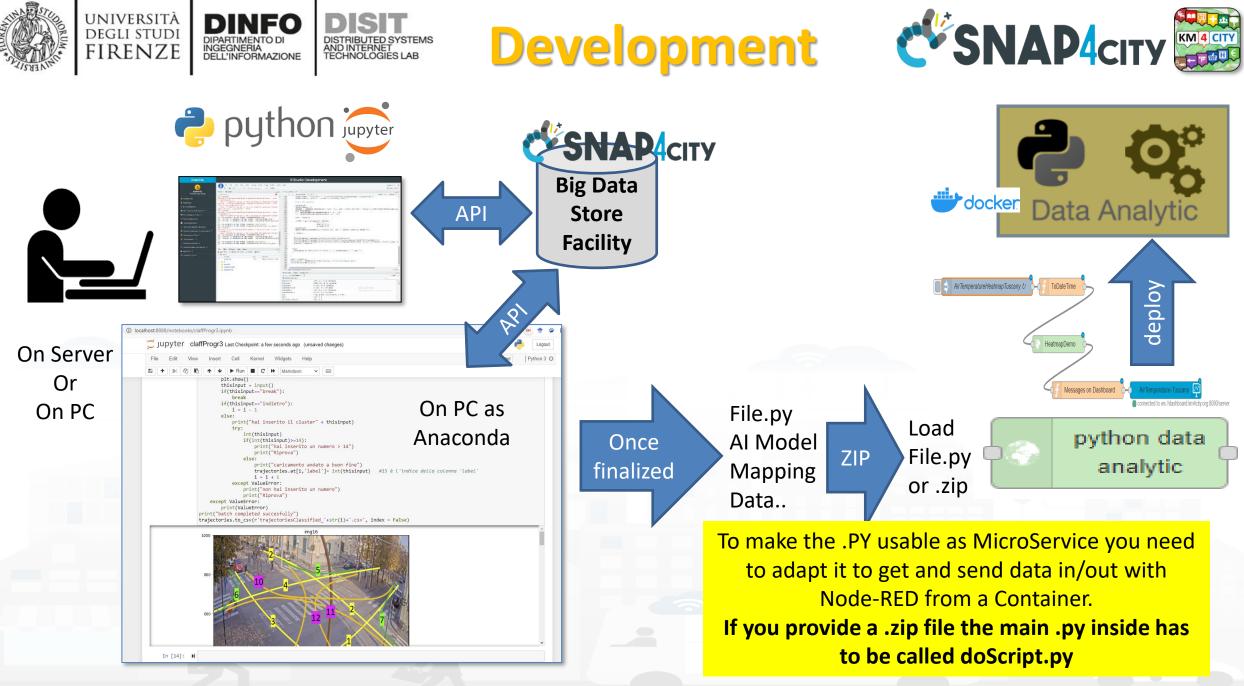

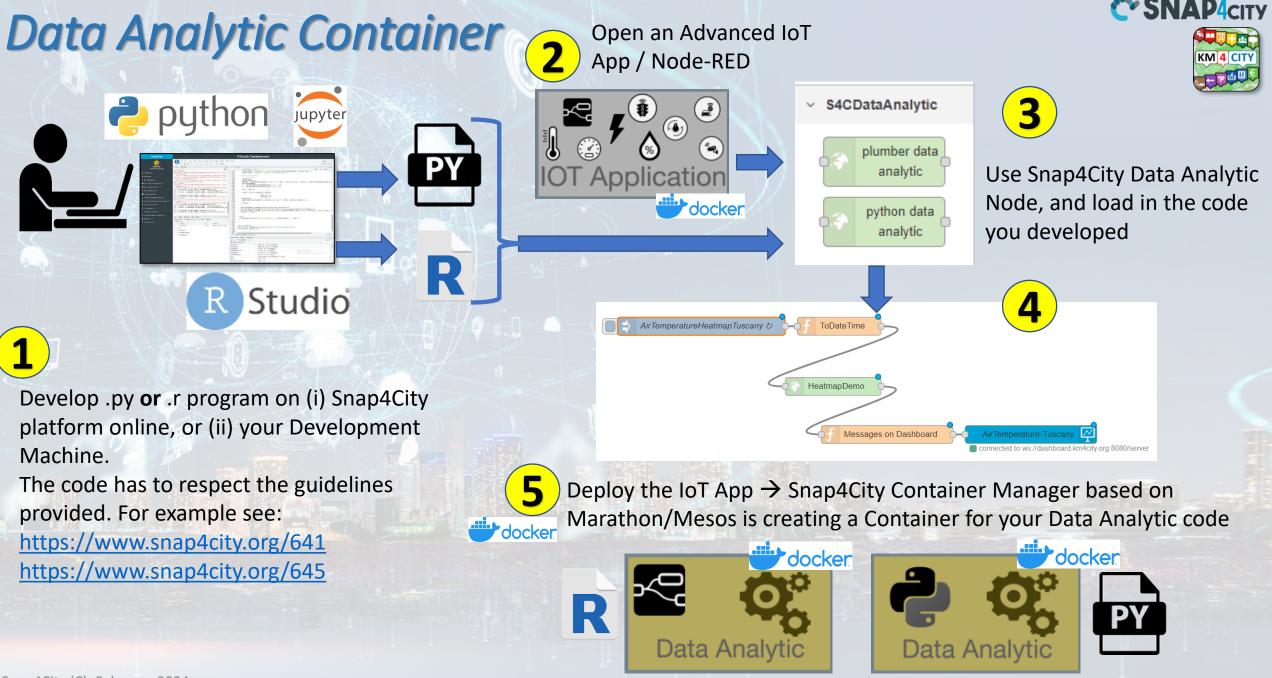





analytics example














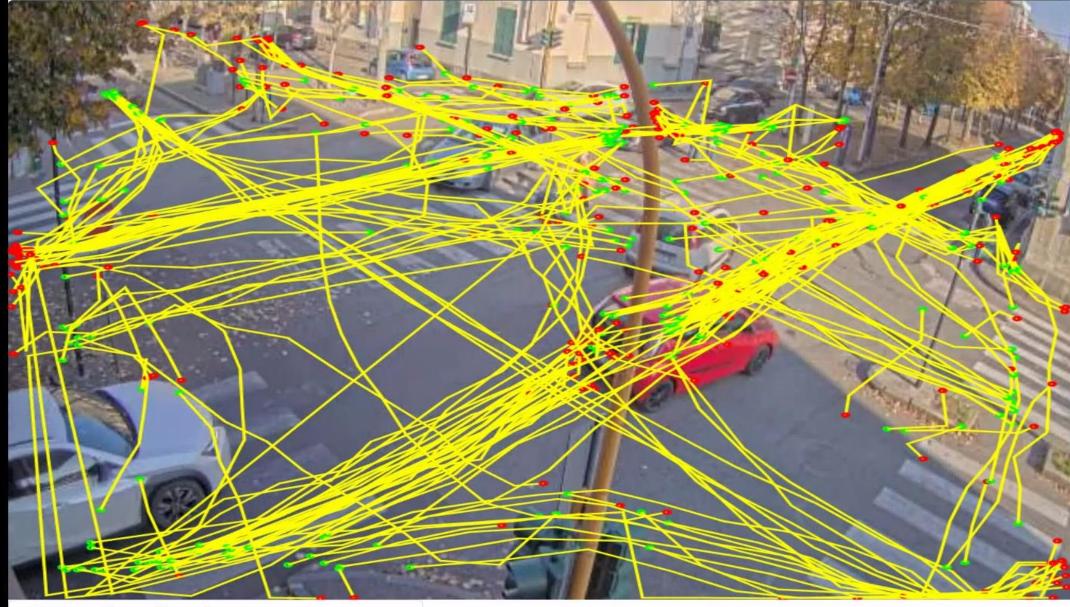

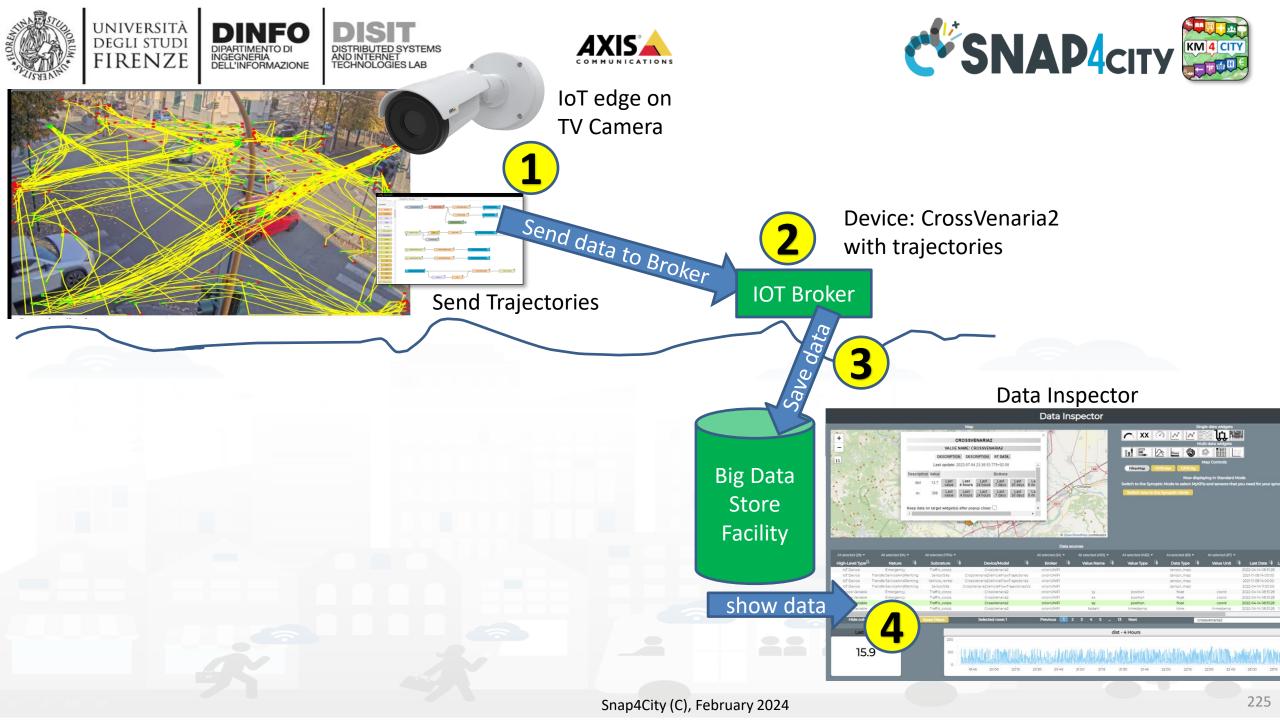

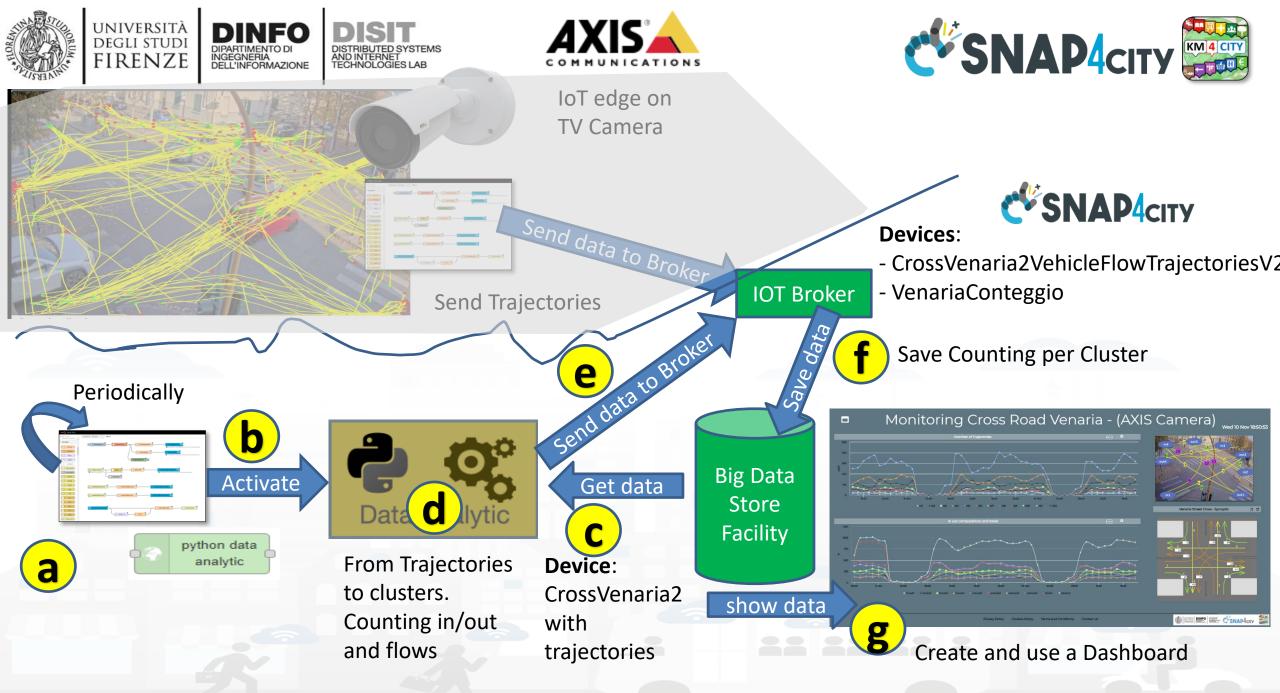










:: 0

Traffic Flow Analysis via TV Camera and Clustering on cloud

Monitoring Cross Road Venaria - (AXIS Camera) Med 10 Nov 18:

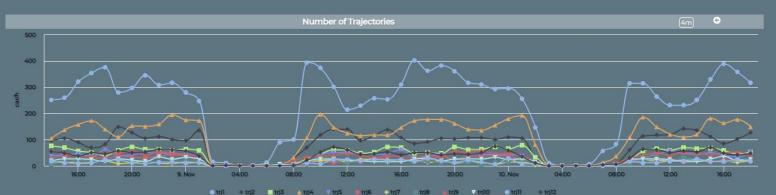


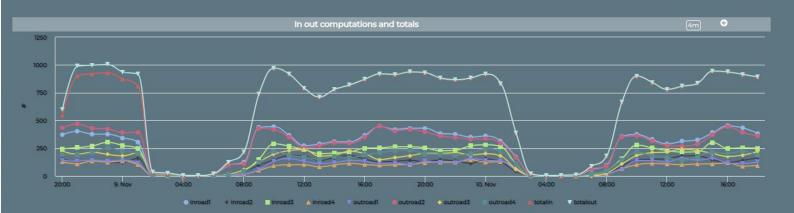



Venaria Street Cross - Synoptic






Privacy Policy Cookies Policy Terms and Conditions Contact us





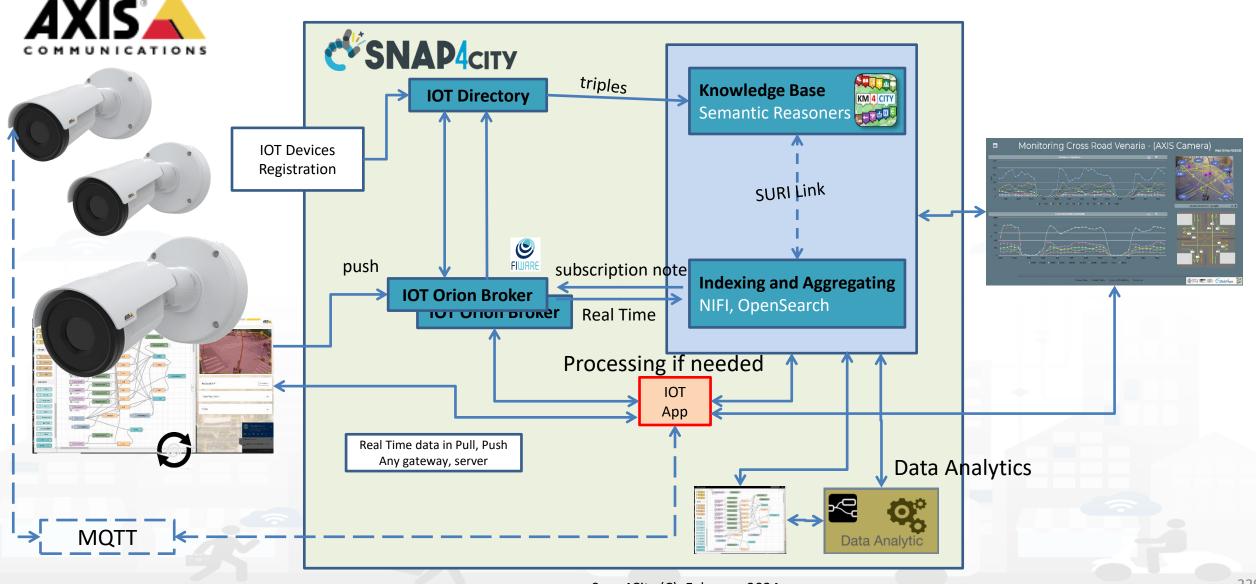






Data Analytics on Dedicated Computer or HPC




Data Analytics on Snap4City platform

TensorFlow

Swagger

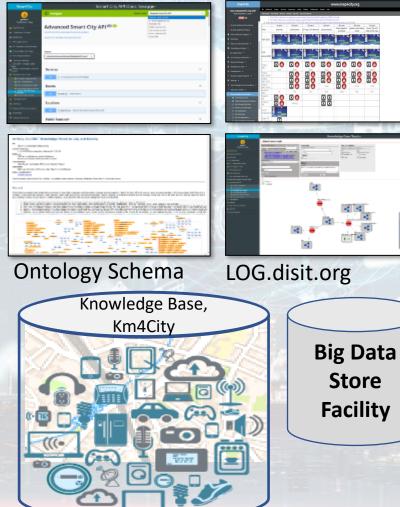


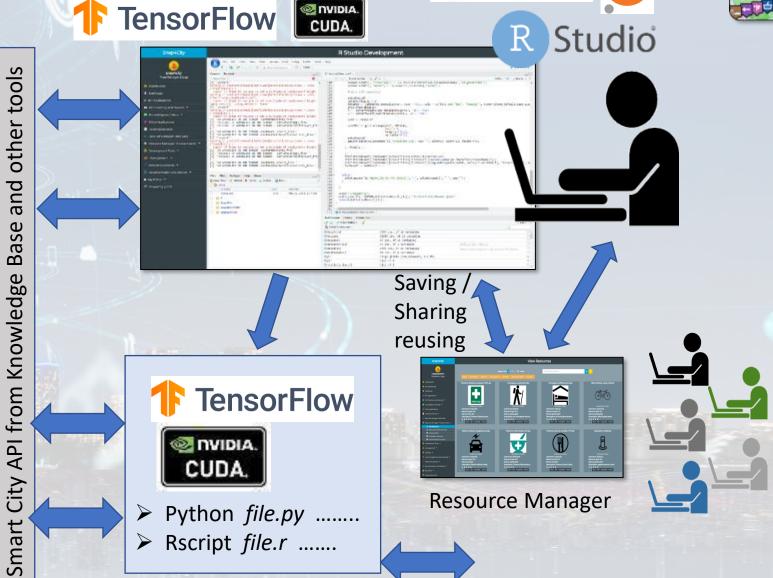

Snap4City (C), February 2024

KM 4 CITY

epython jupyter

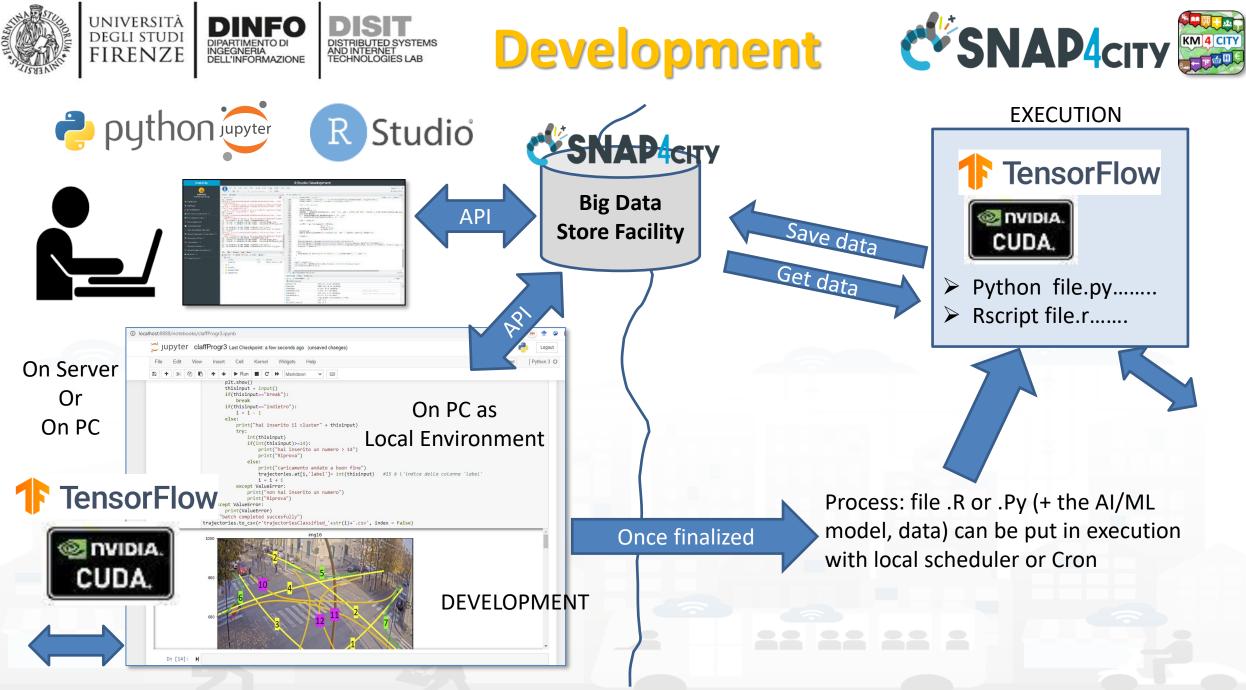

SNAP4city

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES










234

Development Life Cycle Smart Solutions

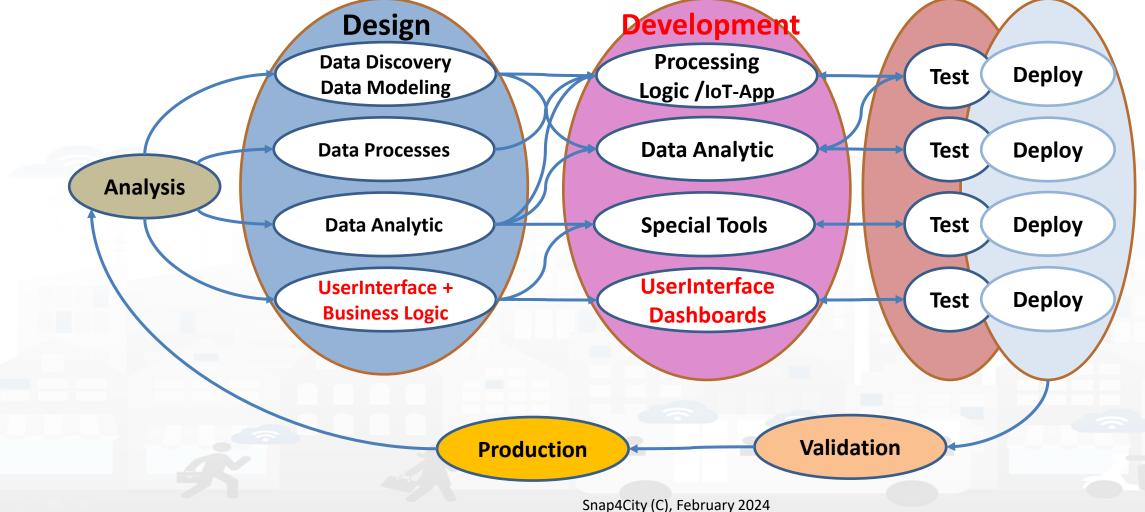

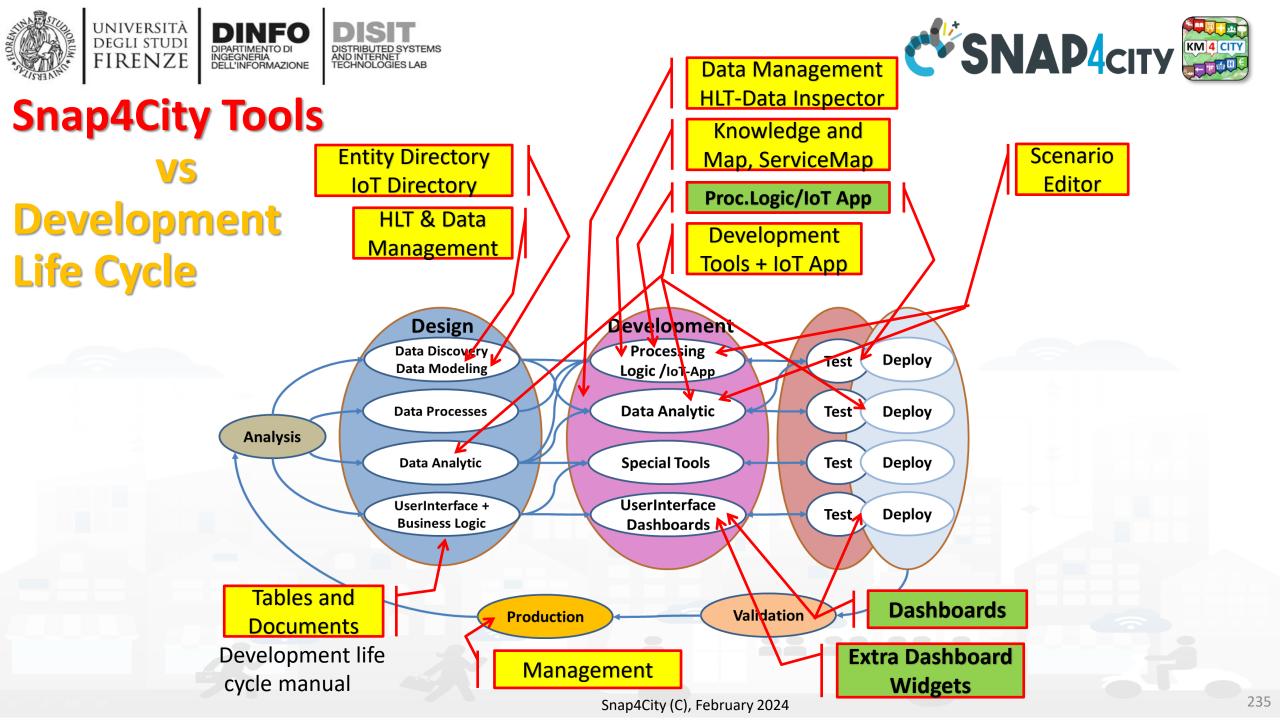

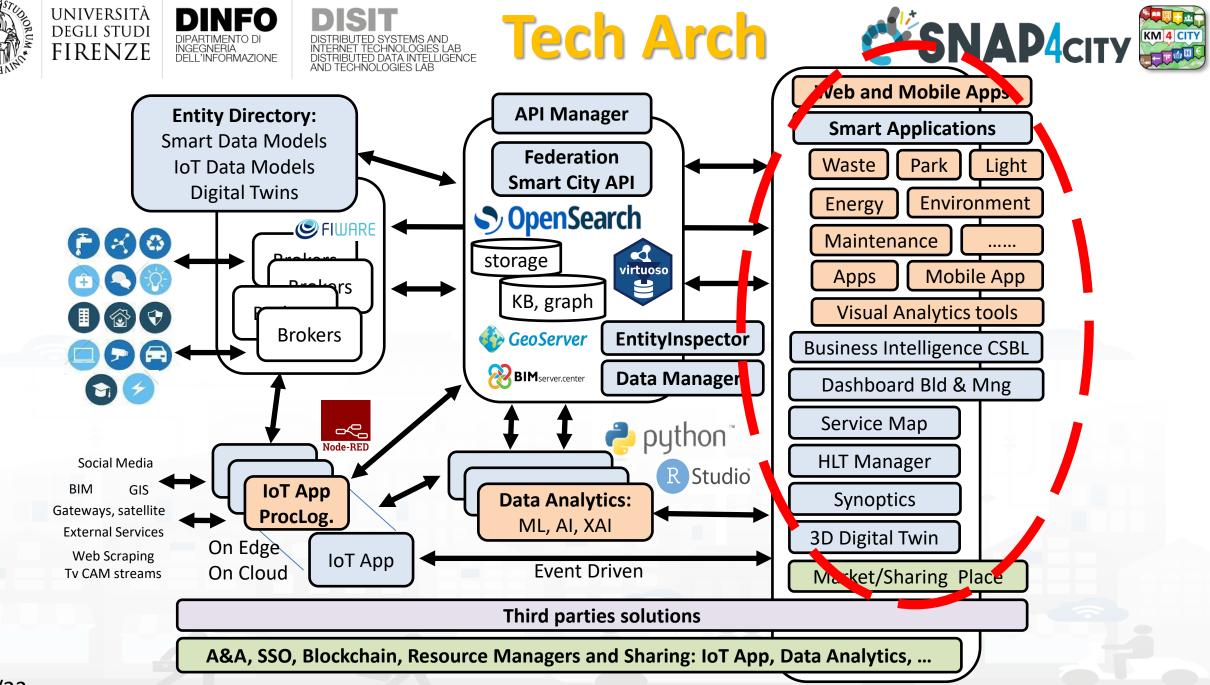

UNIVERSITÀ DEGLI STUDI FIRENZE Snap4City Dashboard Builder (2023) vs Kibana/Grafana

Features	Snap4City Dashboard Builder	Kibana, Grafana
Large Collection of Widgets, also from D3 library	YES	Nothing
Custom Widgets SVG of any kind, full defined process for customization	YES	Nothing
Real time event driven widgets and data	YES	Nothing
Server/Client Side Business Logic for data transformation with visual programming: Node-RED	YES: visual/coding	coding
Maps with custom PIN, bubbles, animated and moving, etc.	YES	Nothing
Maps with paths, shapes, traffic flow, scenarios, routing, heatmaps, what-if, Origin Destination Matrix,	YES	Nothing
Maps with Orthomaps from WFS, WMS, GIS connection, etc.	YES	Nothing
TV camera integration and selection	YES	Nothing
Widgets for business logic integration on real time: buttons, selector, switch, etc.	YES	Nothing
Kiviat, Spider net, Calendar (also any other D3 Widgets)	YES	Nothing
Typical Time Trends: day hours, month week, month days,	YES	Nothing
Time Trend Compare: day, week, month, year	YES	Nothing
Selectors/Menus: text, icons, etc., also in connection with IOT APP, Node-RED	YES	Nothing
Full control of graphic layout, font, colours, refresh per widget, etc.	YES	Nothing
Iframe integration of third party widgets and web pages, nesting dashboards, embedding Kibana	YES	Nothing
Connection among multiple Dashboards and Widgets	YES	Nothing
Synchronization with Video Wall, and Operators Views	YES	Nothing
Multiseries, bar lines, charts, pie, donut, simple selectors, trends, etc., also from business logic	YES	Limited
Single content, string, html, any data, etc.	YES	Limited
Special widgets: Weather forecast, civil protection, road plates, Twitter, SVG, etc	YES	Nothing
Digital Twin Local (BIM) and Global (3D city representation) with 3D traffic, Heatmaps, Devices,	YES	Nothing
Faceted search	YES: selectors, forms, buttons	YES

High Level Types

Snap4City (C), February 2024


- POI, IOT Devices, shapes,..
 - FIWARE Smart Data Models,
 - IoT Device Models
- GIS, maps, orthomaps, WFS/WMS, GeoTiff, calibrated heatmaps, ...
- Satellite data, ..
- traffic flow, typical trends, ..
- trajectories, events, Workflow, ..
- 3D Models, BIM, Digital Twins, ..
- OD Matrices of several kinds, ..
- Dynamic icons/pins, ..
- Synoptics, animations, ..
- KPI, personal KPI,..
- social media data, TV Stream,
- routing, multimodal, constraints, ...


IRENZE


• decision scenarios,

etc.

10/22

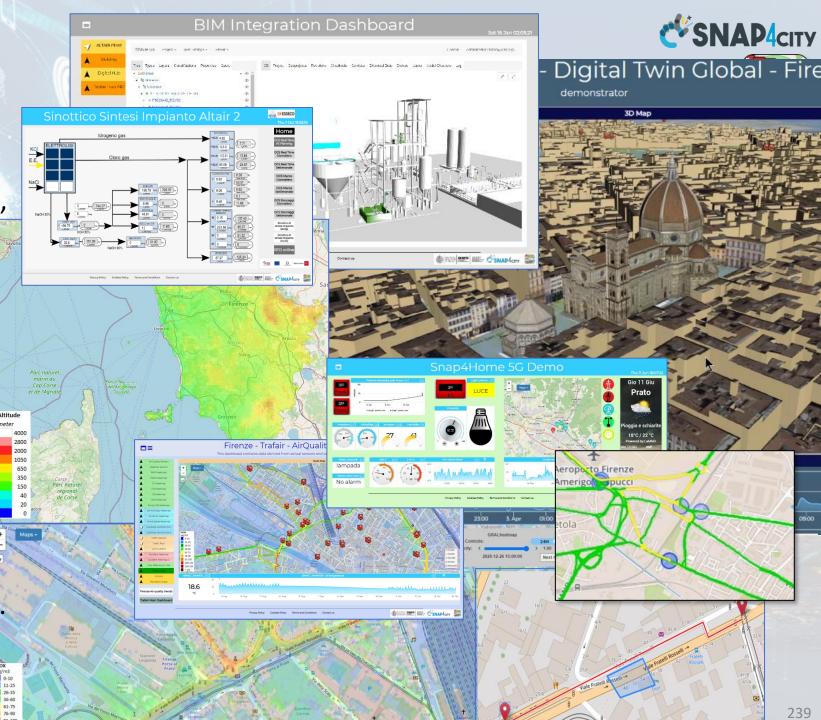


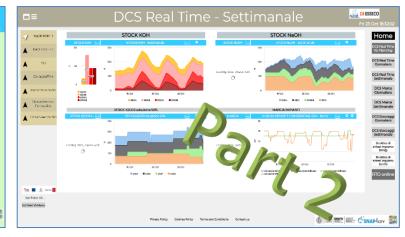


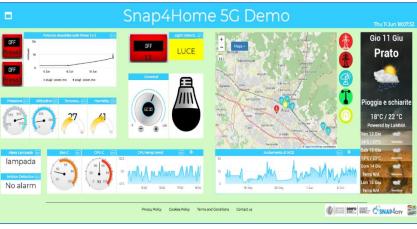


Firenze - Trafair - AirQuality Heatmaps



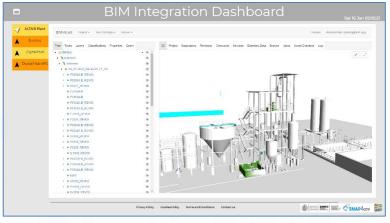

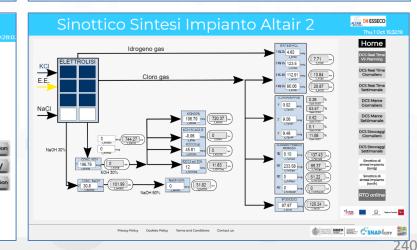

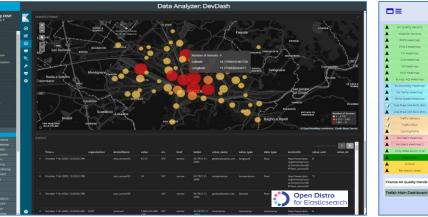



1 1 8 5 2 4 3

😑 1day 😑 2days 😑 3days

ow much time distri...

Snap4City (C), February 2024

1.7

minutes

26. Aug 2.Sep




3D Multi Data Map - Digital Twin Global - Firenze



Sun 25 Oct 18:52:00


AND IN COLUMN



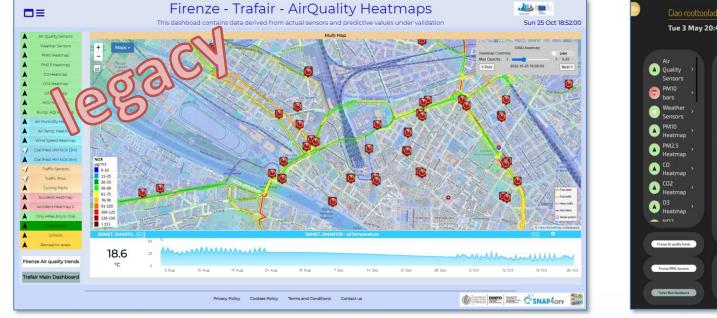





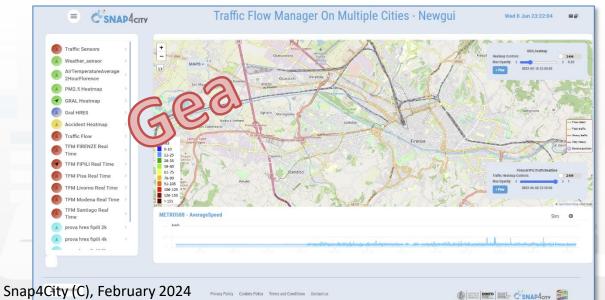



Cookies Policy


DINFO

DISIT

Privacy Policy

Dashboards (Public by (ORG))

9

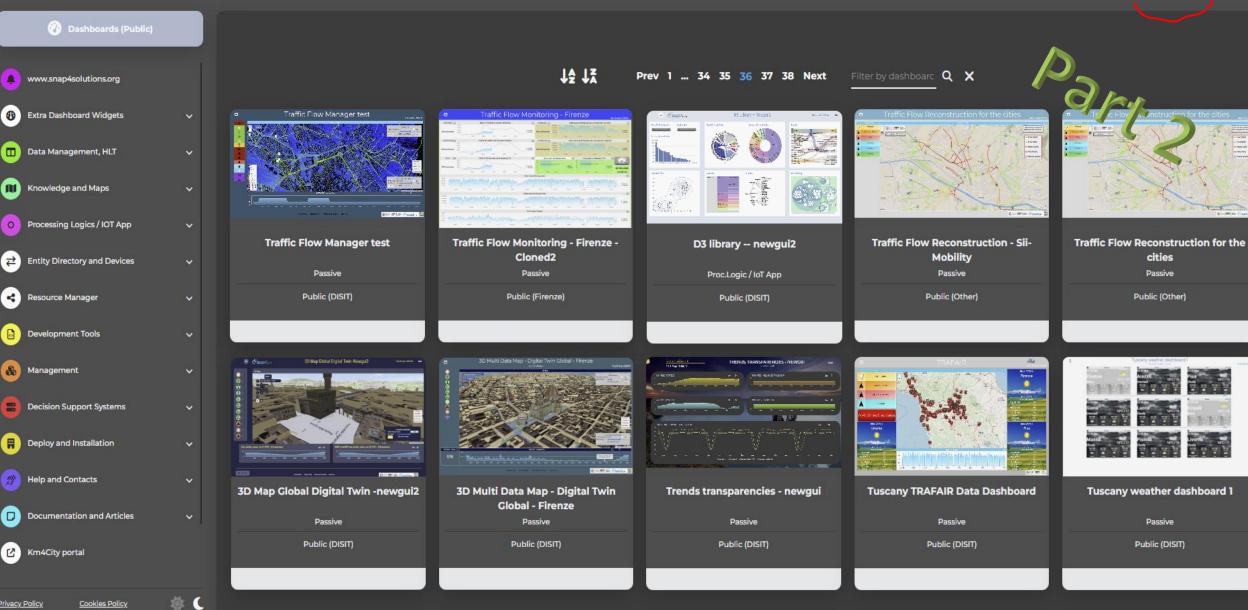






Dashboard List and Editor








How the Dashboards exchange data

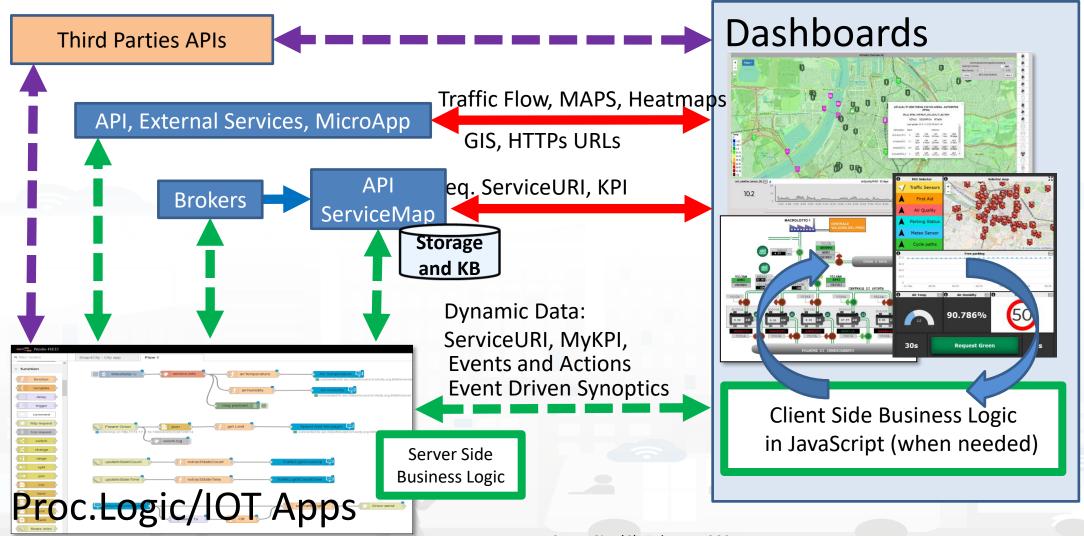





How the Dashboards exchange data

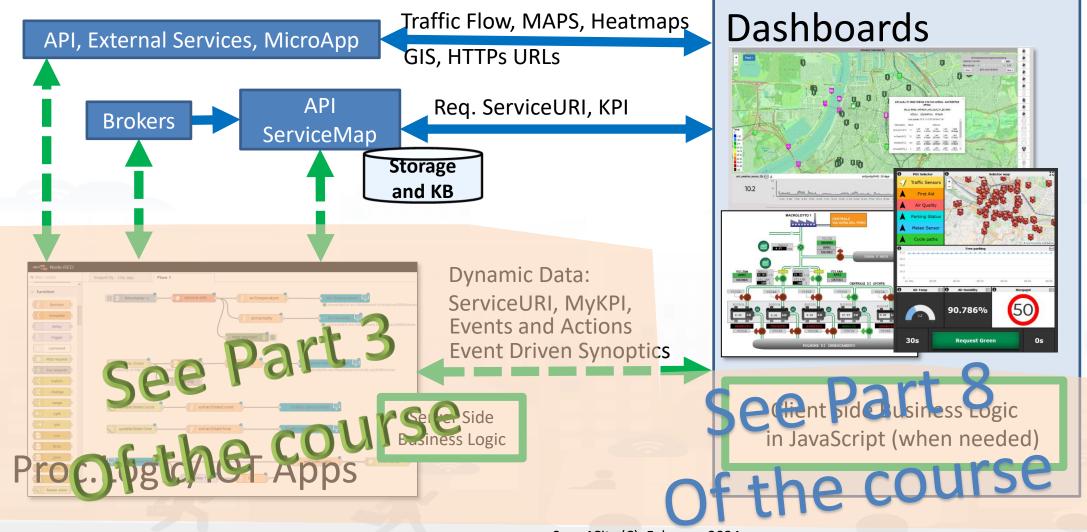



Dashboard List and Editor

UNIVERSITÀ Degli studi

FIRENZE

DINFO

DIPARTIMENTO DI INGEGNERIA DELL'INFORMAZIONE DISIT

DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB





The Selector for Multi Data Maps

	Wifi
	Train_station
	Toilet
	Theatre
	Social_centre
	Other_accommodation
	Museum
	Library
i	Selector - Click the icon
1 2000 2000 2000	Selector - Click the icon Fast recharging stations
€ ∠J ₽	
	Fast recharging stations
	Fast recharging stations Normal recharging stations
	Fast recharging stations Normal recharging stations ZTL gate
	Fast recharging stations Normal recharging stations ZTL gate Smart waste
	Fast recharging stations Normal recharging stations ZTL gate Smart waste Florence WiFi POI

UNIVERSITÀ

DEGLI STUDI FIRENZE

INGEGNERIA DELL'INFORMAZIONE AND INTERNET TECHNOLOGIES LAB

EAQI

Ŕ


J

"Å"

Ŵ

M

WHAT-IE

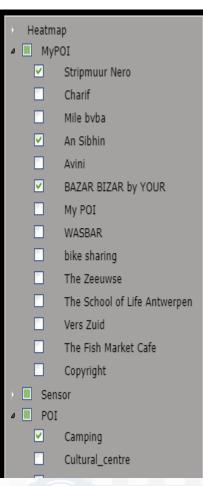



• Different styles

- Icon and Text menu
- Custom Menu Icon
- Icon Menu buttons
- Etc.
- Features
 - Removable header
 - Colours custom
 - Transparencies
 - Mixed modalities
- Note:
 - Manus can be realized also with a set of Buttons

The Selector is the Map Controller




Custom Dynamic Pins

UNIVERSITÀ Degli studi

FIRENZE


INGEGNERIA DELL'INFORMAZIONE DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB

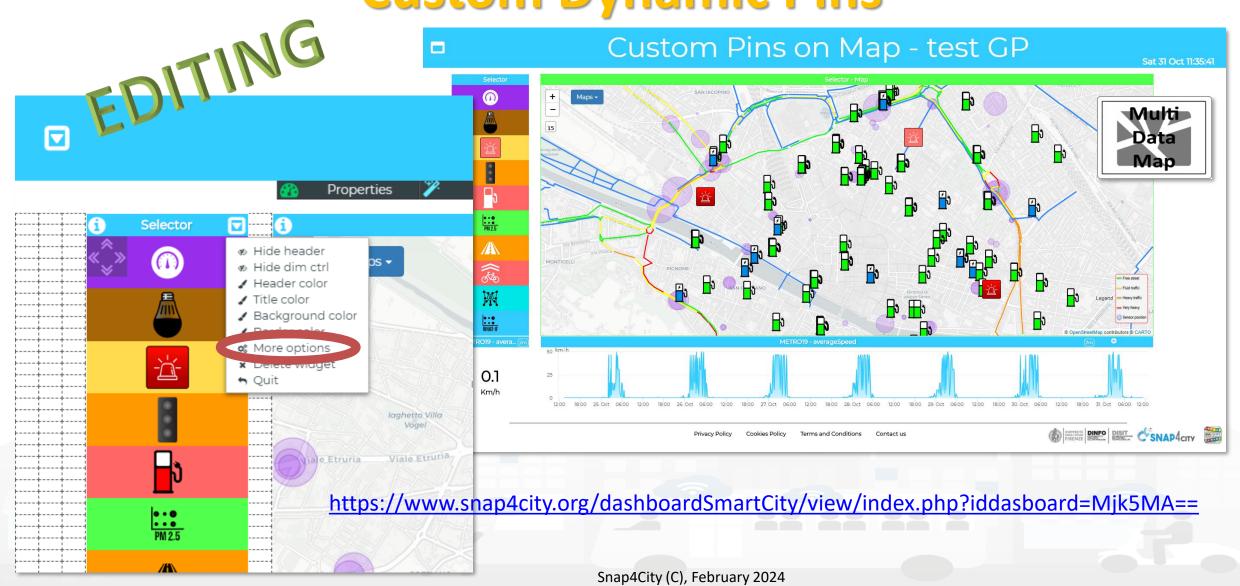



UNIVERSITÀ Degli studi


DINFO

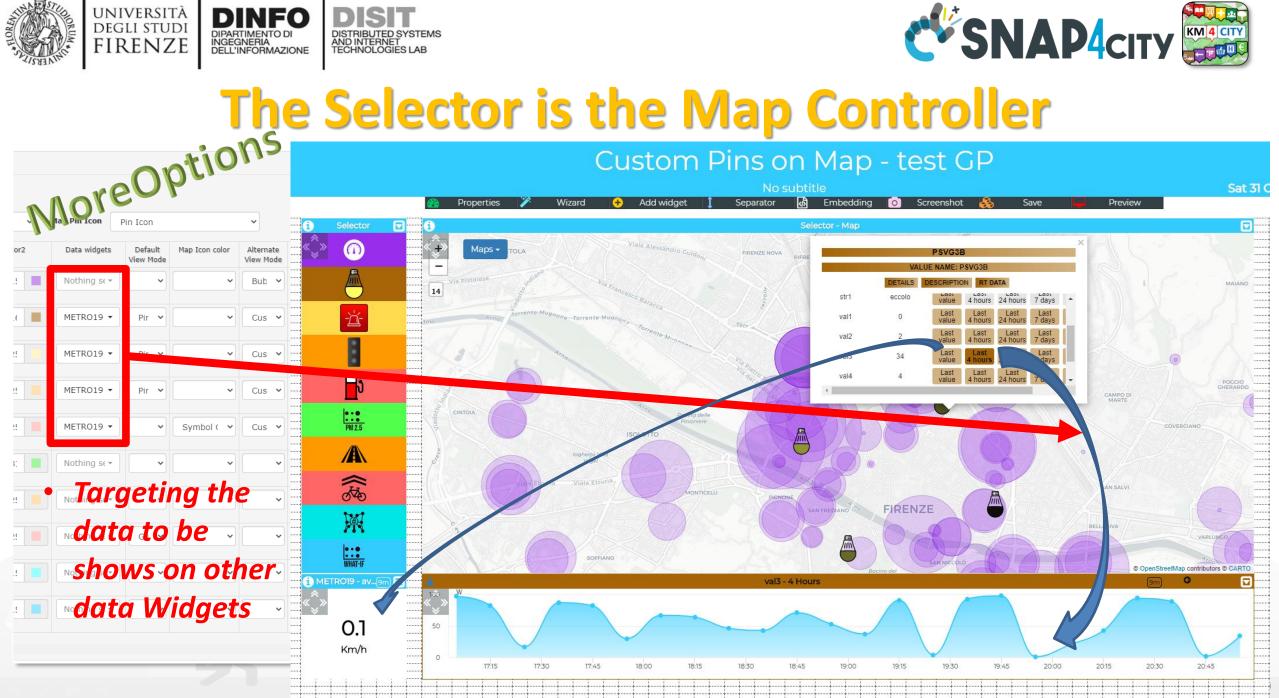






Develop Dashboard Main Concepts

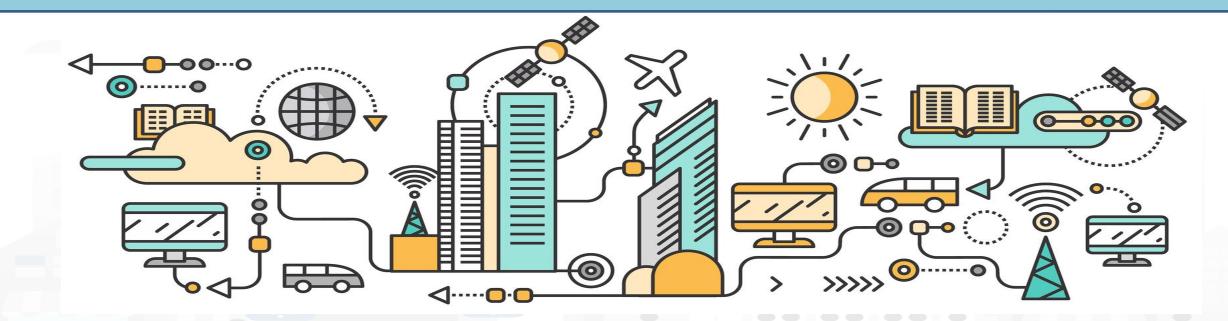

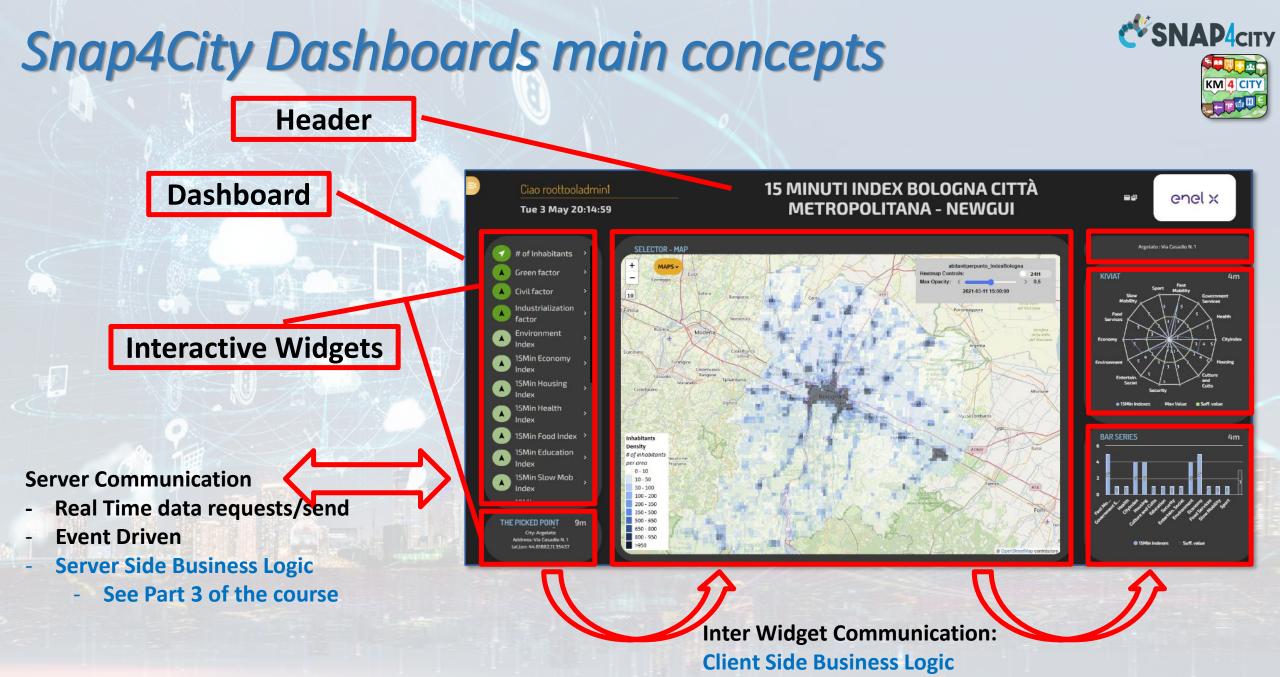

See part 8 of the Course







A Dashboard Design Schema is provided

UNIVERSITÀ DIGUISTUNI FIRENZE DINFO DISIT In the following section, the schema that should be adopted to design each single Dashboard/view of the solution IV.B.7. Example of Dashboard Schema + For each Dashboard or View we suggest to specify: Vehicle dashboard Name Vehicle Client Side Business Logic Producer: Plaggio | Model: Ape Cross | Plate: AB123CD | Company: Builder S.p Server Side Business Logio background element) distinction Country 2 Display vehicle information and measured values Aim Purpose Monitoring Status Draft Missing None Dark. etc. Preferred size PC. Style PΔ Chat enabled No Kind Active Data vs Widget Map Widge Description: map showing the vehicle position over time Kind: monitoring only Preferred Data representation: map Data: Vehicle, latitude, Vehicle, longitude. on IoT Apps, or both DataTable Widget Description: table reporting the vehicle events Kind: monitoring only Preferred Data representation: table Data: VehicleEvent eventID, VechicleEvent dateObserved, VehicleEvent status VehicleEvent kind SingleContent Widget · Descrition: single content showing the total km travelled by the vehicle Kind: IoT App Preferred Data representation: single number Data: Vehicle.kmTotal effects Synoptic Widget Description: battery shaped synoptic to represent the available energy percentage Kind: monitoring only

Preferred Data representation: animated synoptic Data: Vehicle.energyLevel Time series Widget Description: to plot the evolution of the velocity and acceleration values over time Kind: SC Business Logic Preferred Data representation: time series plot Data: Vehicle velocity, Vehicle acceleration To be developed in JavaScript into the Dashboard Widget Event driven: To be developed in IoT App with S4C Dashboard Nodes IoT Application → Event driven: IoT Application → Event driven: As can be seen in the example dashboard schema above, several information must be specified: Name: name or ID of the dashboard · Mockup: a graphical example showing the overall appearance of the dashboard. This can be realized using some graphic painting tool (a screenshot of an empty dashboard can be used as <u>Aim</u>: a description of the dashboard <u>Purpose</u>: it can be monitoring, simulation, what-if, data entry, etc. Multiple values are possible. <u>Status</u>: it can be draft, developed, finalized, accepted Missing: in this field list all missing element that should be included in future Preferred Size: specify the preferred viewing size of the dashboard, such as PC, HD, mobile, or an explicit resolution size (row x column) Style: the base style to be used for the dashboard. Available styles include Gea, Ballon, PA, Ballon <u>Chat enabled</u>: yes or no <u>Kind</u>: passive or active. A passive dashboard show data taken from storage only, without sending actions toward an IoT App; however, passive dashboards may have selectors, maps, etc., and a lot of interactive visualization that do not requires neither changes in the status on server, nor sending commands to the server side. Differently, active dashboards, are those that send or receive commands to/from the server side, via some client-side Business Logic, server side Business Logic · Data vs Widget: for each widget required in the dashboard, some information must be specified according to the following schema: Name: the name of the widget to be used Description: a brief description of the widget and its use o Kind: monitoring, IoT App, or Client-Side business logic (note that, the last two entries characterize an active dashboard) Data: the data the be used in the widget, typically retrieved from some IoT device. Multiple entries can be accepted. <u>Client Side business logic</u>: to be specified if present

- Description of the effects: a description of the implemented client-side business logic
- Server Side business logic: to be specified if present
 - IoT App: description of the involved IoT App
 - Event driven: indicate to which events the IoT App responds



32

31



• Passive Dashboards: showing data taken from

Storage only, no actions toward IoT App

 Passive dashboards may have Selectors, maps, etc., and a lot of visualization without changing the status on Server, no sending commands to the Server Side.

• Custom Business Logic

- Active Dashboards, which can be those sending or receiving commands to/from the logic coded somehow and in particular for
 - Server Side Business Logic → logic on IoT Apps with Snap4City Dashboard Nodes, which is easier to be programmed begin based on Node-RED visual programming.
 - Client Side Business Logic → logic on JavaScript on specific Dashboard Widgets only for skilled developers of Snap4City Platform. We suggest first prototype by using Server Side Business Logic, then pass to Client Side Business Logic in JavaScript.
 - Both kind of Business Logics may be active on the same Active Dashboard.













How the Dashboards exchange data

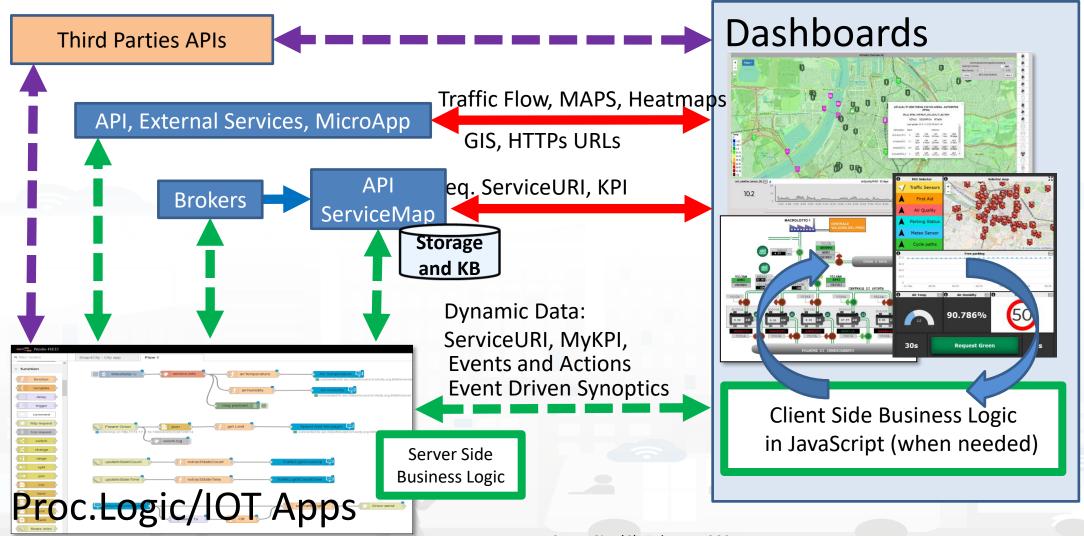

Snap4City (C), February 2024

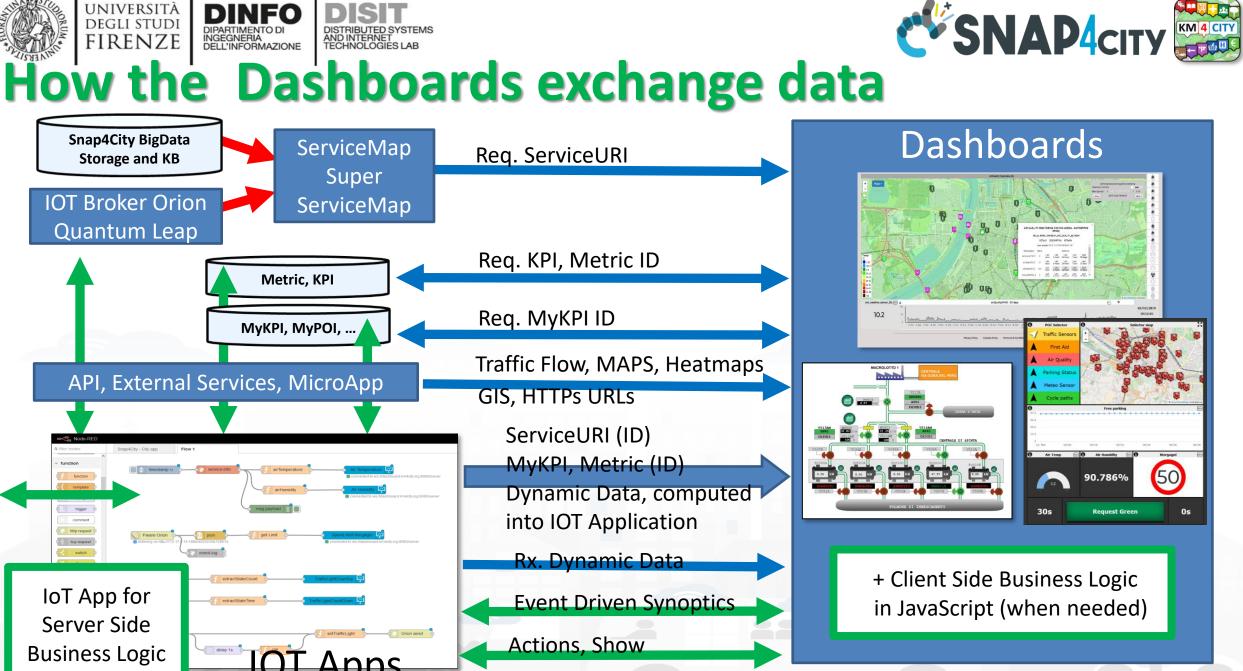

Snap4City (C), February 2024






Dashboard Widgets' Capabilities for Business Logics


Widget name / description	Event Driven	Some Local Interaction	Server-Side Business Logic Node-RED	Client-Side Business Logic (IN = JavaScript)
Single Content	Yes		OUT	OUT
Speedometer	Yes		OUT	OUT
Gauge	Yes		OUT	OUT
MultiSeries, Time Series, Curved Line, time compare	Yes	Yes	OUT	
Time Trend, Time Series	Yes	Yes	OUT	IN/OUT
Spidernet, Radar	Yes	Yes	OUT	IN/OUT
BarSeries	Yes	Yes	OUT	
Donut, Pie	Yes	Yes	OUT	
Device Table	Yes	Yes	IN/OUT	IN/OUT
Multi Data Map (dashboard Map)	Yes	Yes	IN/OUT	IN/OUT
Selector	Yes	Yes		column
Button, Impulse button	Yes	Yes	IN	CORTINI
Switch, on/off but.	Yes	Yes	IN/OUT	IN/OUT
Knob, Dimer	Yes	Yes	IN/OUT	
Keypad, Num Pad	Yes	Yes	IN	
External Content	Yes	Yes	IN/OUT	IN/OUT
Event Driven MyKPI	Yes		IN	
Synoptics (see External Content) (read, write, subscribe)	Yes	Yes	IN/OUT	
Dashboard Form	Yes	Yes	IN/OUT	Possible on Ext.Content
Speak Synthesis	Yes	-	OUT	Possible on Ext.Content
D3 charts	Yes	Yes	OUT	





Develop: via Dashboard Wizard

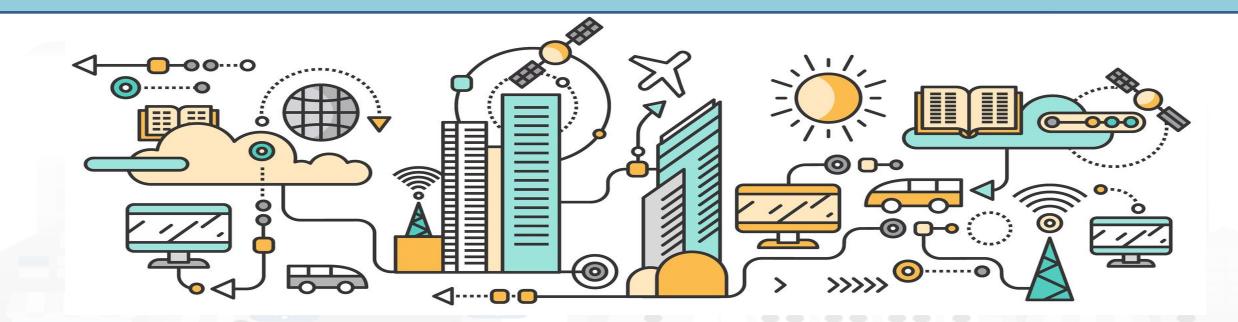

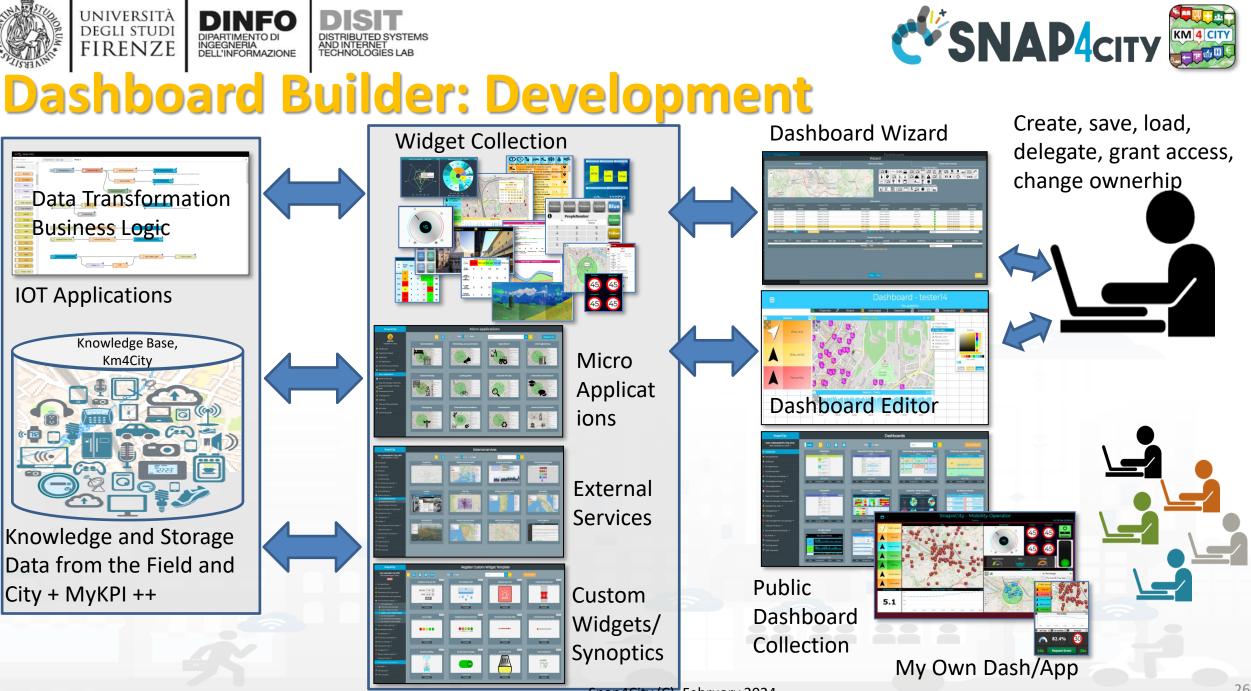












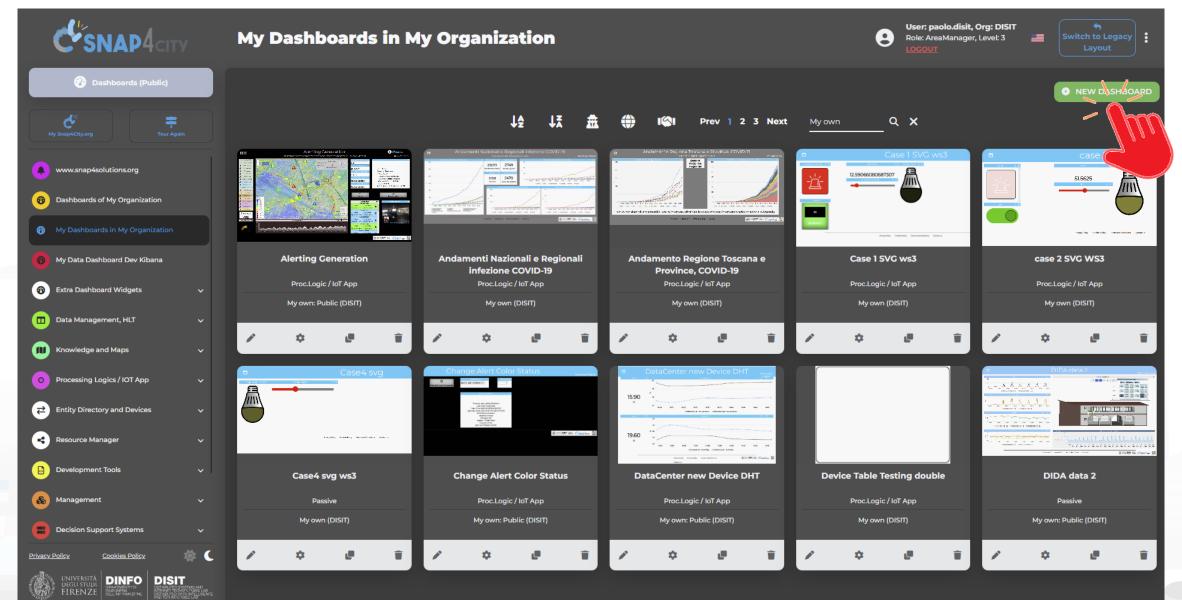


Snap4City (C), February 2024

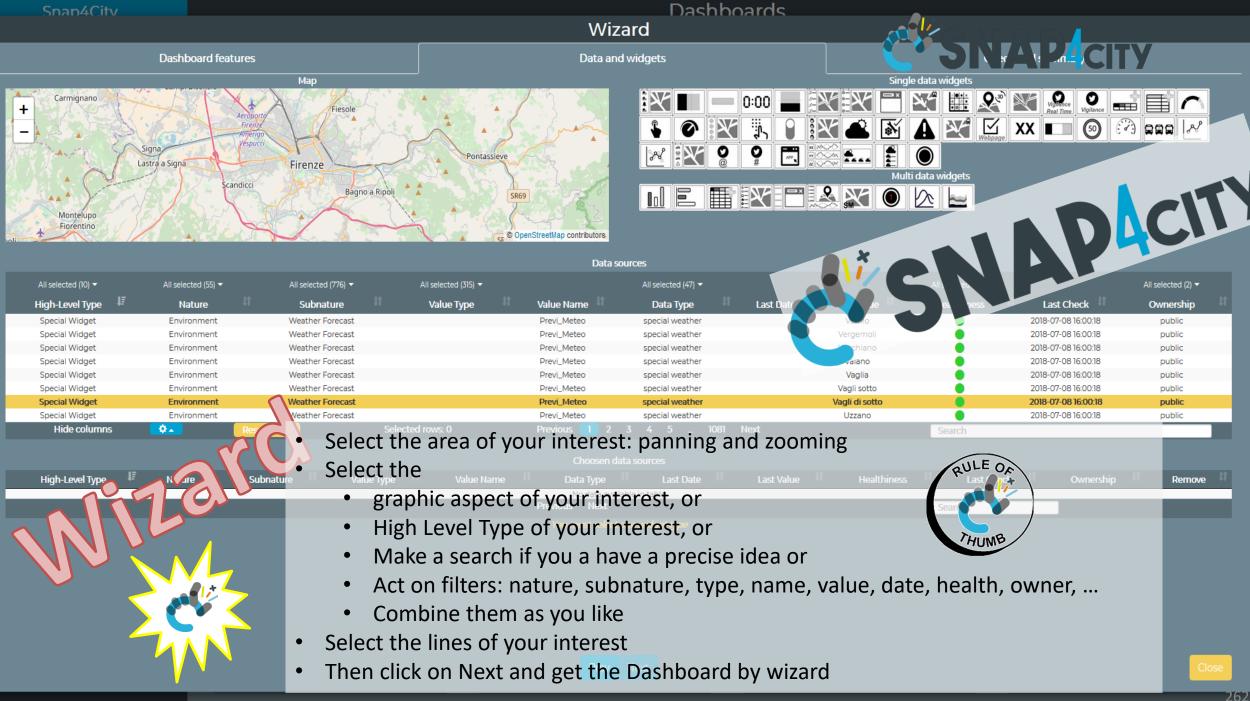

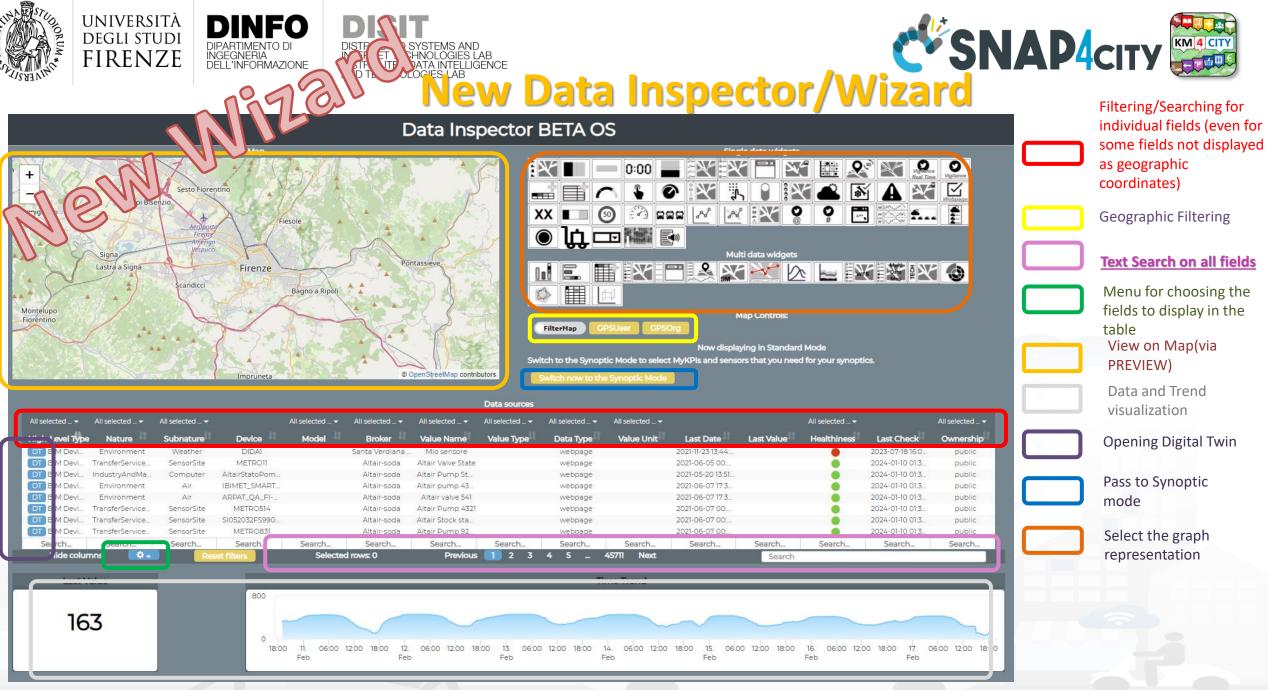


Snap4City (C), February 2024

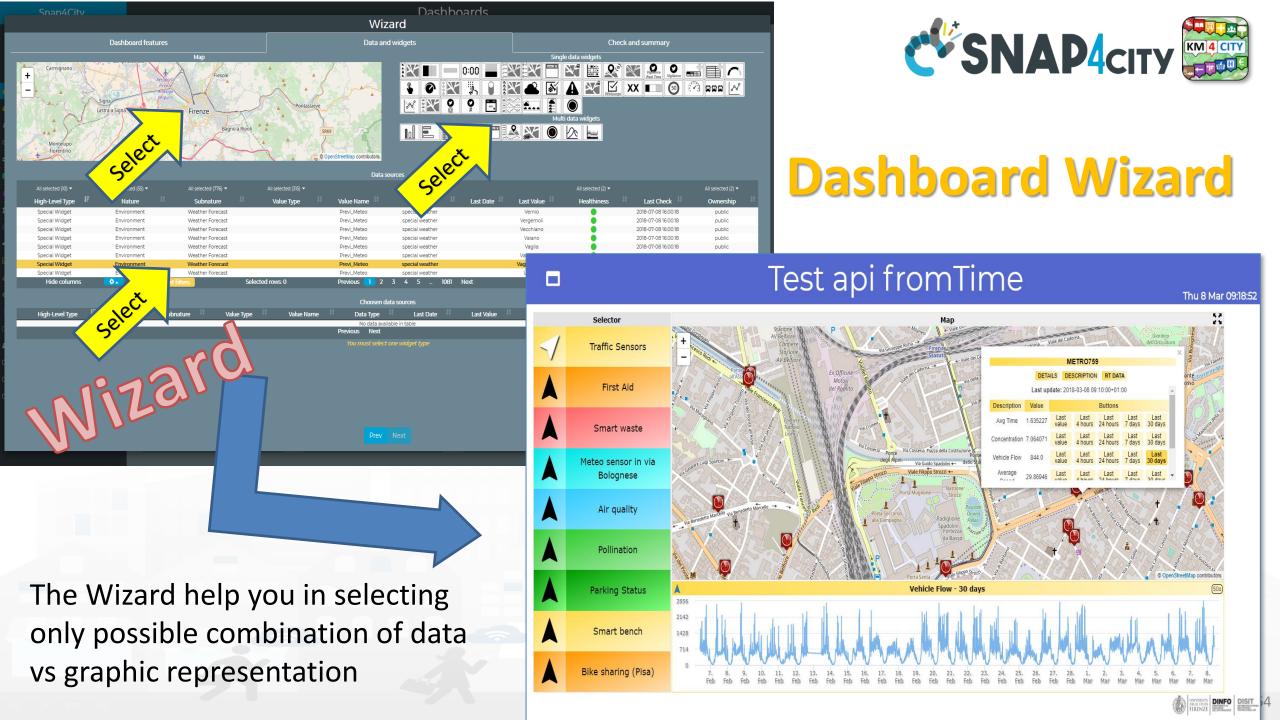







Develop: Dashboard Synoptics

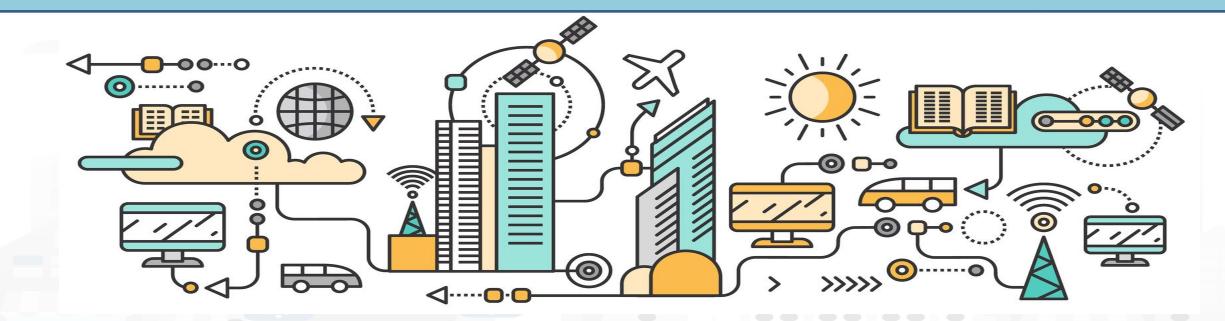

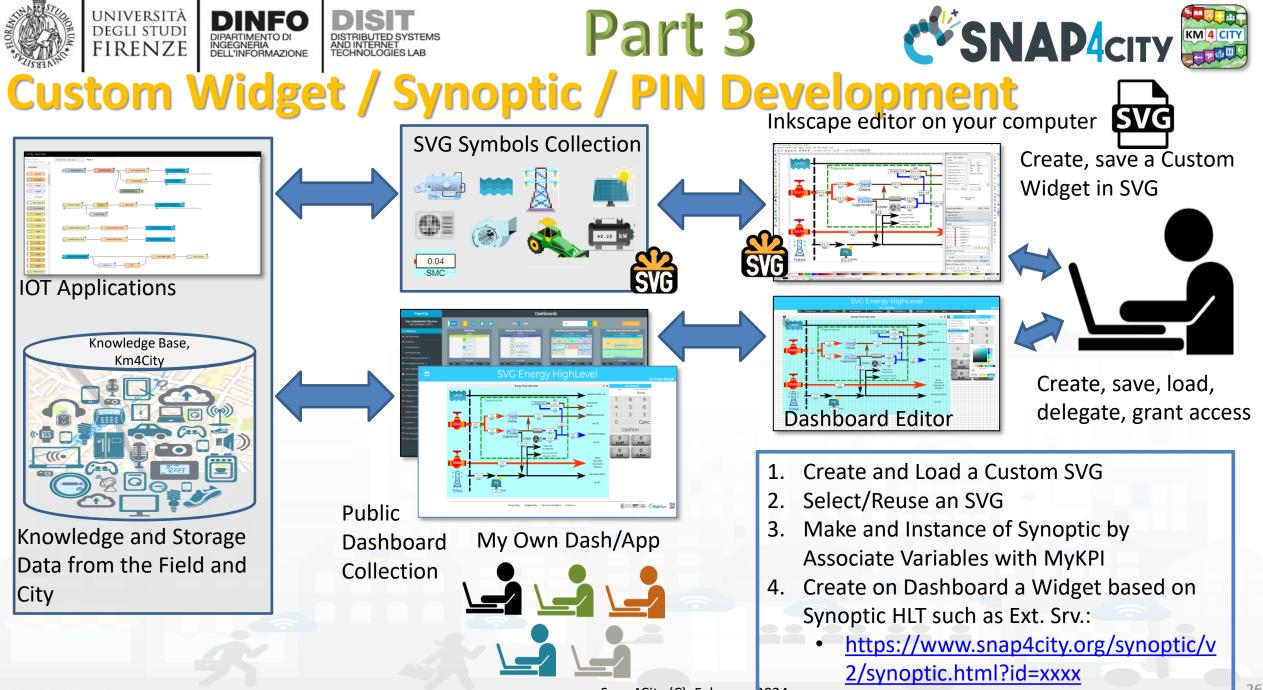


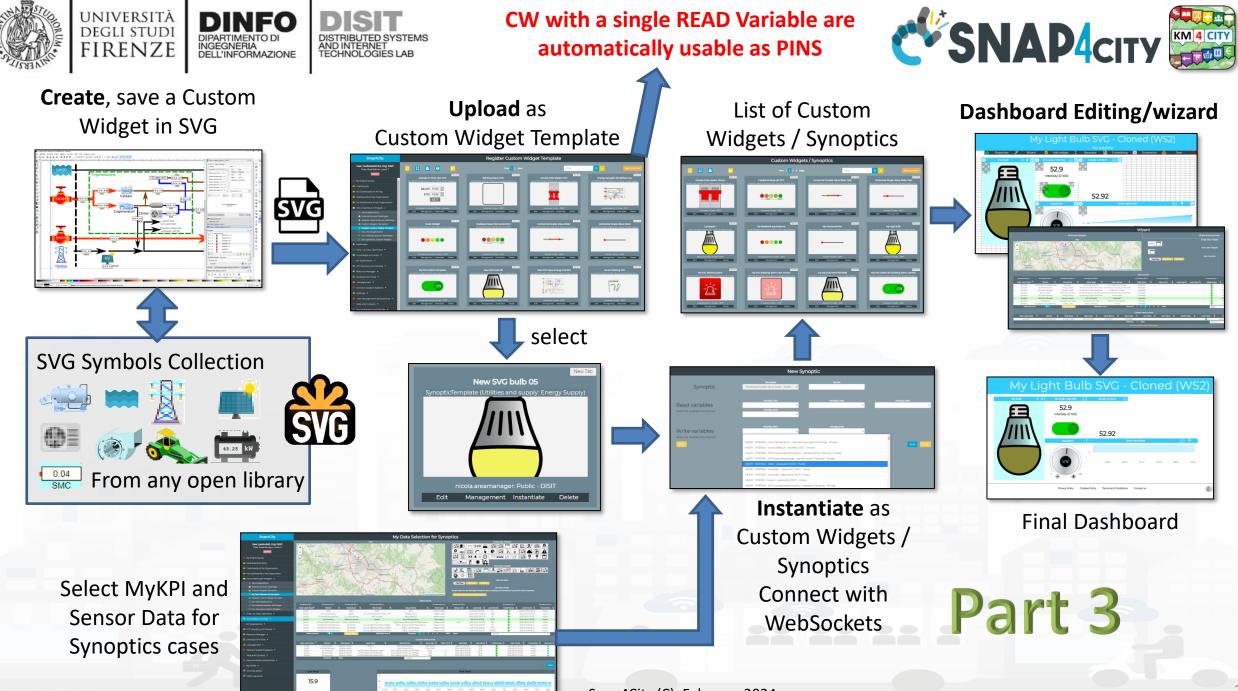

Snap4City (C), February 2024







INGEGNERIA DELL'INFORMAZIONE

- Smart Energy
- Smart Light
- Smart

Begin

Finish

- Energy View
- Custom Controls


-2

22

Total clicks


17:00

4:00

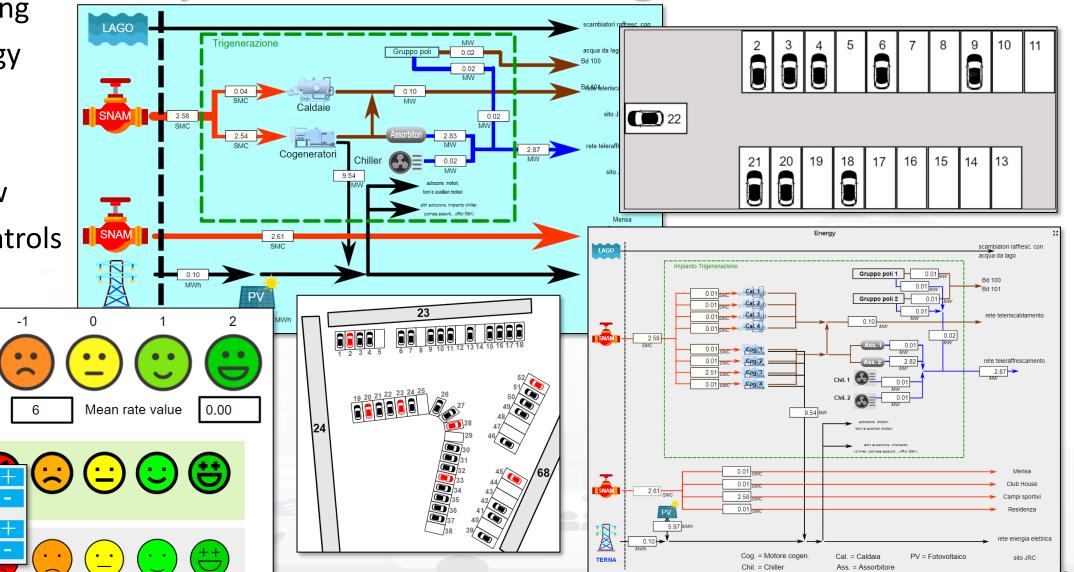




From-To Custom Widgets / Synoptics to Storage in WS

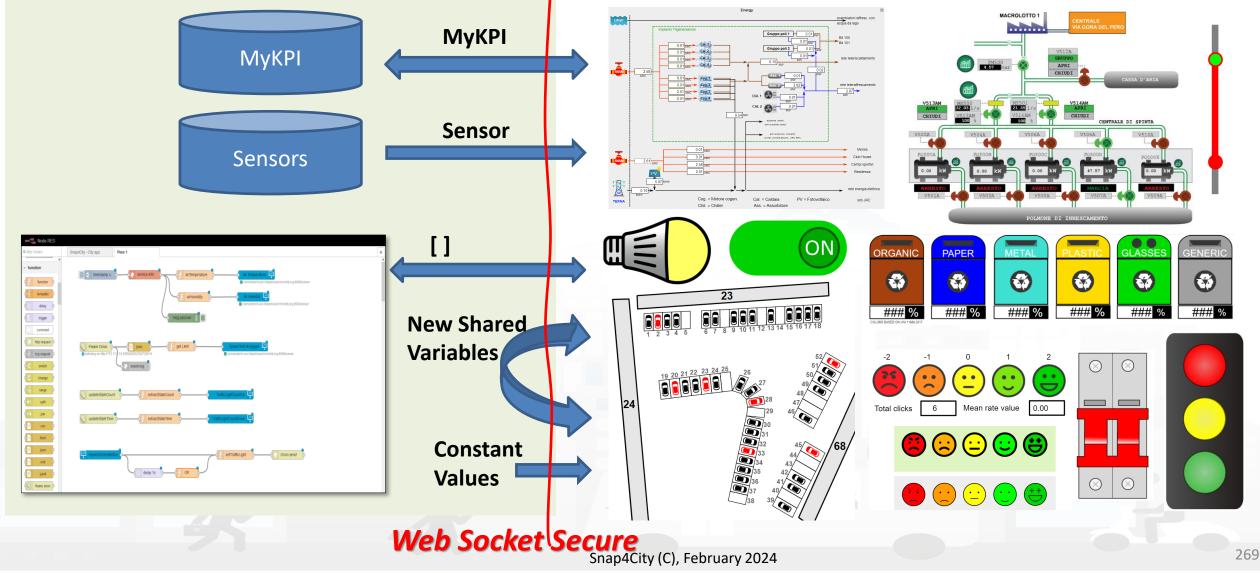




SVG Custom Widgets Examples

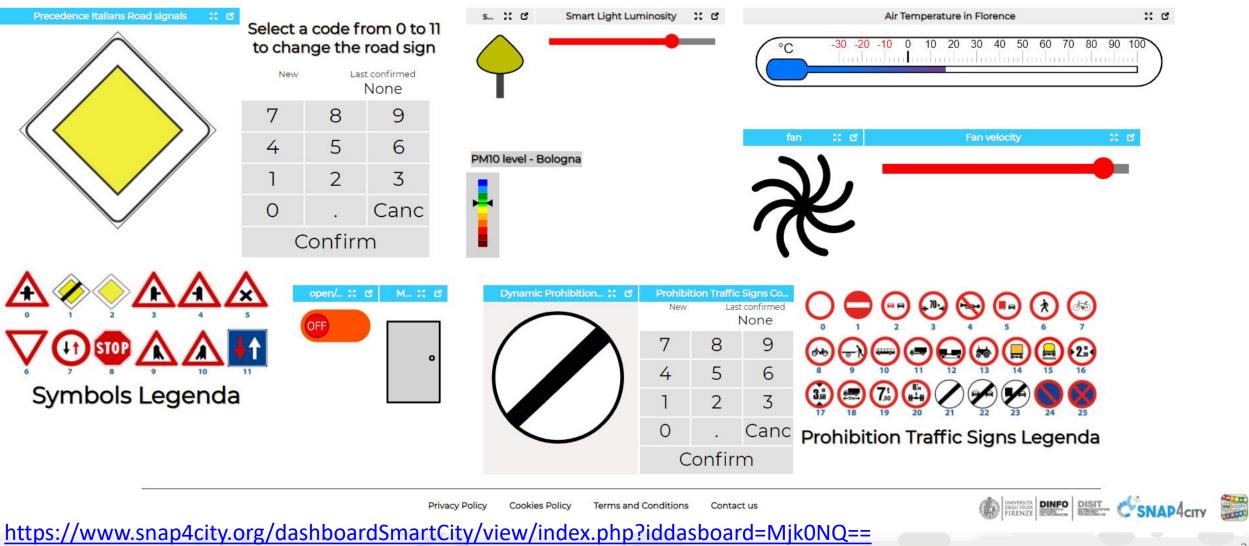

Snap4City (C), February 2024

Sat 16 Jan 01:07:39

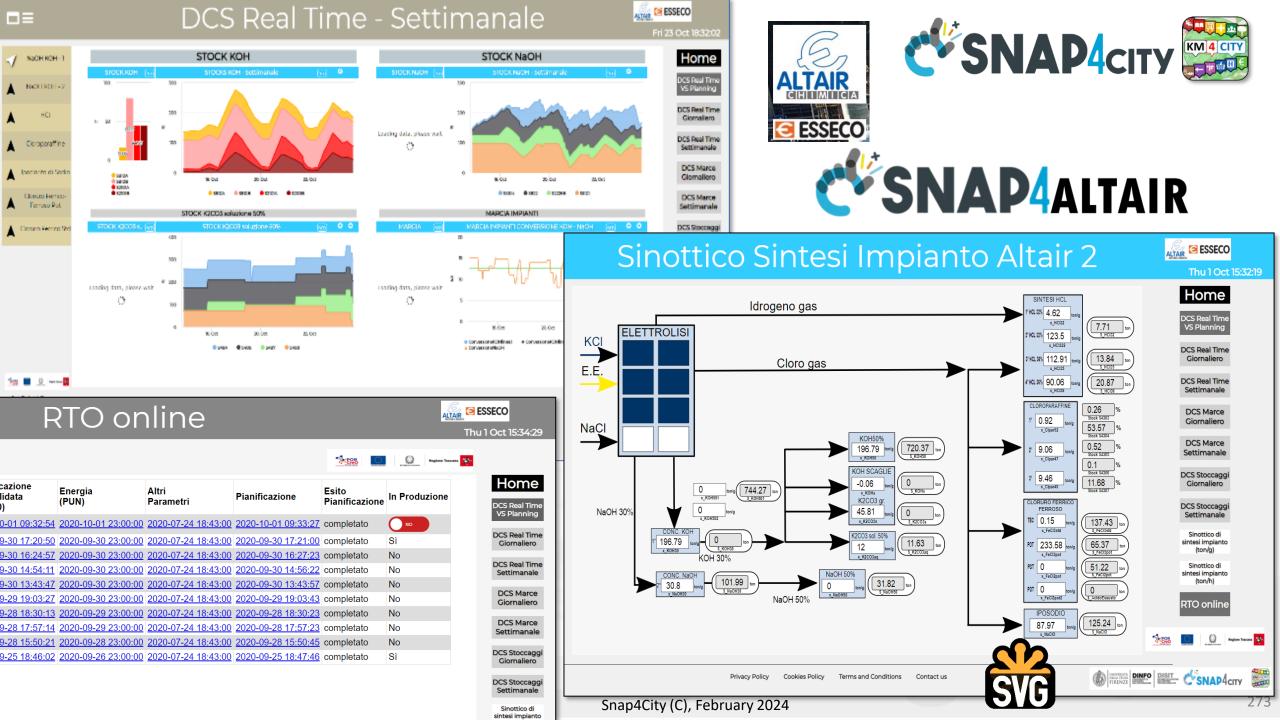





Develop: Dashboards with Server-Side Business Logic, Part 3








IoT App / Proc.Logic

- Storage → IoT App / Proc.Logic
- External Service $\leftarrow \rightarrow$ IoT App / Proc.Logic Part 3
- Dashboards ← → IoT App / Proc.Logic



- Data Analytics $\leftarrow \rightarrow$ IoT App / Proc.Logic Part 4
- Broker \rightarrow Storage
- IoT App / Proc.Logic → Broker
- Broker → IoT App / Proc.Logic
- IoT App / Proc.Logic → Storage

Part 5






Principles of Server Side Business Logic

- It is possible to have one Processing Logic (IoT App) referring to multiple Dashboards, and one Dashboard referring multiple Processing Logic (IoT Apps)
- Let see a 1:1 relationship from Proc.Logic and Dashboard
 - Any Action performed on Dashboard is provided to the Proc.Logic, which may produce reactions on Dashboard.
 - The context of Proc.Logic ← → Dashboard is a singleton, thus any user connected to the Dashboard will observe the evolutions performed. So that all the users will see the same story and view
 - This is good for control rooms, and single/few users prototypes






How the Dashboards exchange data

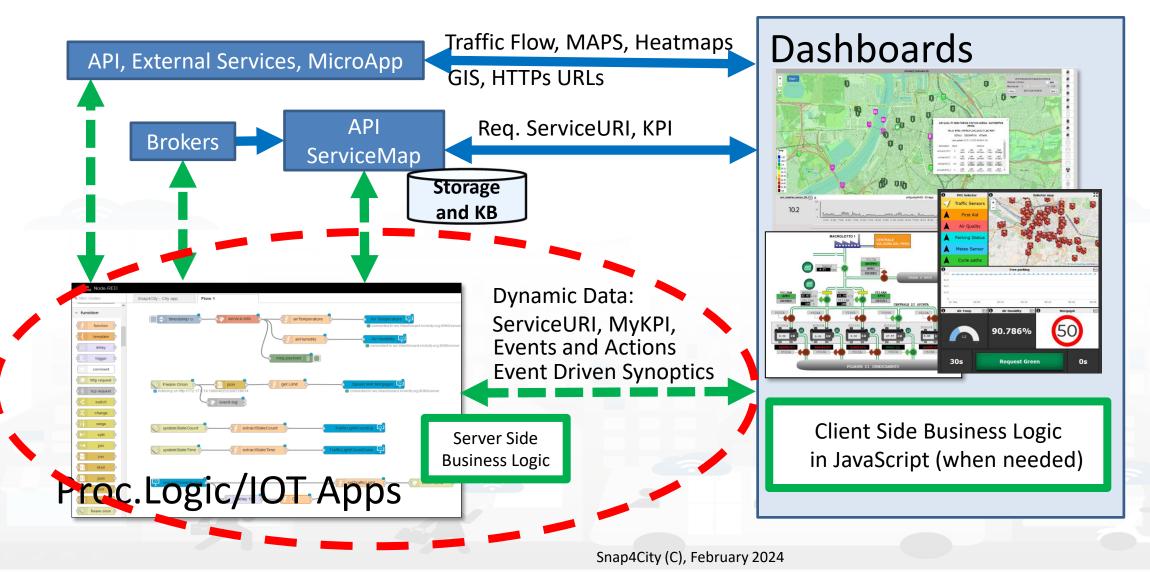




SNAP4city Node-RED Maps Server Side Business Logic vs IOT Apps

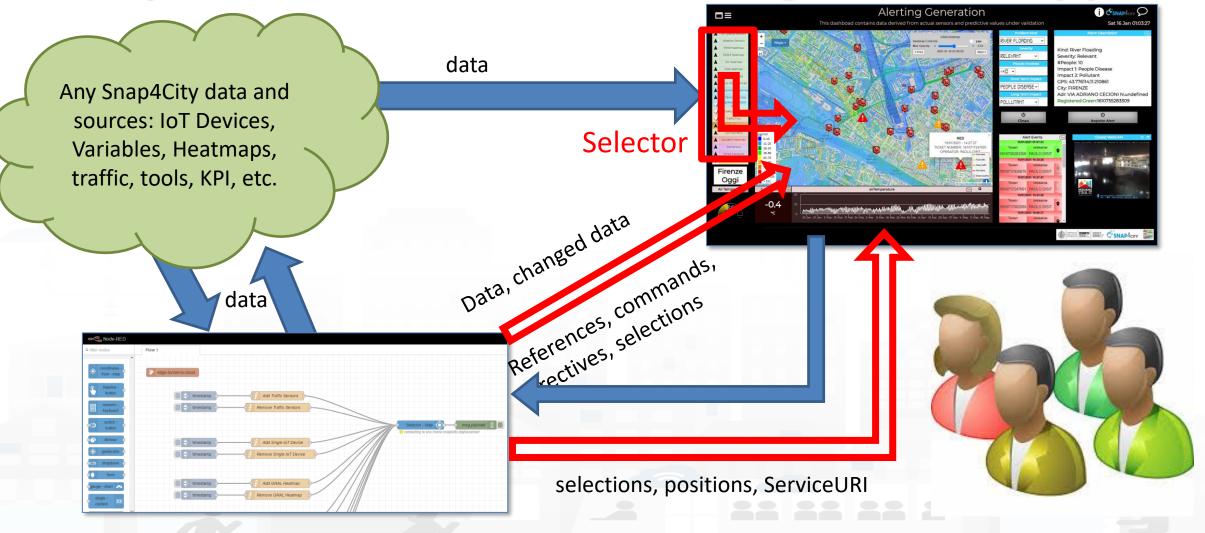





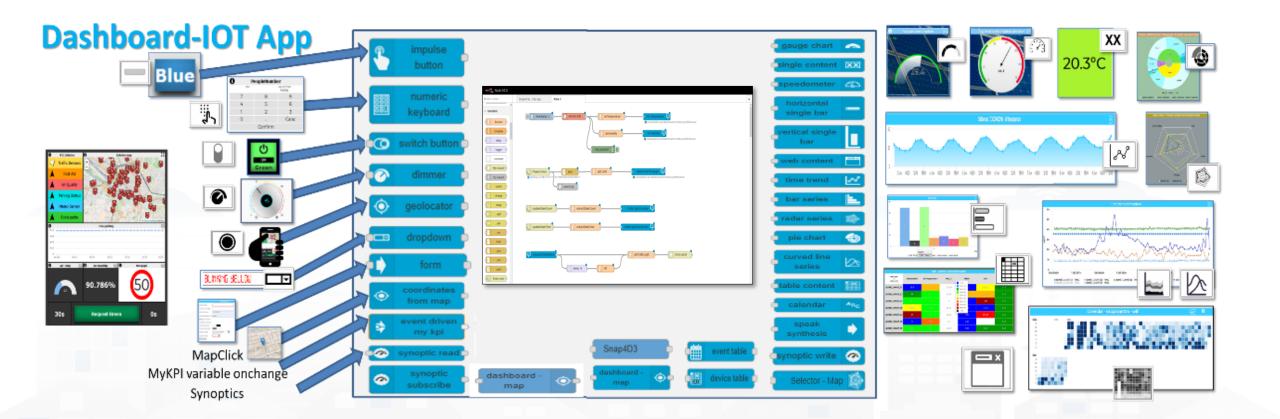

A DATA OF A DATA	universit degli stui FIRENZ	DI DIPARTIMENTO DI DISTRIBUTED SYSTEMS	Dyna	mi	C ((6	5/2	3) 🦿	SNA	P4	СІТУ	Node-RED
Widgets	ICONS	Widget Name, Description		IOT App	Dashboard App	I-IOT	KPI (metric)	MyPersonalD ata	MyDa ta	My KPI	Sensor
XX		Single Content	single content	X (cs)	X (ED)		Х	Х	Х	Х	Х
	50	Custom widgets in SVG are dat	a driven	X (cs)	X (ED)					Х	х
$(\overline{z}, \overline{z}, \overline{z})$		Speedometer, Gauge speedometer	🚯 🖕 gauge chart 🙈	X (cs)	X (ED)		Х	Х	Х	Х	х
		Device Table	event table 🝺	X (cs)	X (ED)	2				Х	х
		Single Bar, V/H	vertical single bar	х	X (ED)	/en	Х				
		Single and Multiple Bars, stacked or not, ordered	Bar series	X (cs)	X (ED)	Driv	Х	Х	Х	Х	Х
		MultiSeries, shaded, staked and non staked, TTT	curved line series	X (cs)	X (ED)	ent	Х	Х	Х	Х	х
8		Time Trend (single)	🧧 time trend 🛛 🛃	Х	X (ED)	Ve	Х	Х	Х	Х	Х
<u></u>		Time Trend Compare				<u>ш</u>	Х			Х	Х
		SpiderNet, radar, Kiviat	🗖 radar series 🛛 🎊	X (cs)	X (ED)	0	Х	Х	Х	Х	Х
		Pie, Donut, 2 layers Donut	o pie chart 🚯	X (cs)	X (ED)		Х	Х	Х	Х	Х
		Table	device table 🗅	X (cs)	X (ED)		Х	Х	Х	Х	Х
(N Malli	Calendar	calendar ABc	X (cs)	X (ED)					Х	х
	A CONTRACT OF THE OF TH	Speak Synthesis	Speek Synthesis	X (cs)	X (ED)					string	string
		Maps dashboard - map	Selector - Map 🔯	X (cs)	X (ED)		Many High	n Level Types		Х	X 33





Widgets and their counterpart Nodes

- Send information and commands to the Dashboard Widget, for example for an action produced by the users. (in widget/node)
- Receive information and commands from the Dashboard Widget, for example presenting a dashboard change to the users. (out widget/node).
- Send/receive information and commands to/from the Dashboard Widget, for example for collecting users' actions and presenting a change to the users on the same widget (in/out widget/node).

On Server-Side (into Proc.Logic) the developer can even create some HTML pages and provide them into a Dashboard Widget. And a mixt of Widgets in, out, in/out



Advanced IOT Applications

DISTRIBUTED SYSTEMS AND INTERNET TECHNOLOGIES LAB

- Synoptics can
 - do all 😊


UNIVERSITÀ Degli studi

FIRENZE

- Widgets can
 - send/receive dynamic data,

INGEGNERIA DELL'INFORMAZIONE

- change data sources, etc.
- Provide interactive maps
- HTML pages can
 - be dynamically generated
 - provide forms to produce data for IOT Applications
 - Collect files on web and system
 - produce files on web ad system
 - have CSS and AJAX control

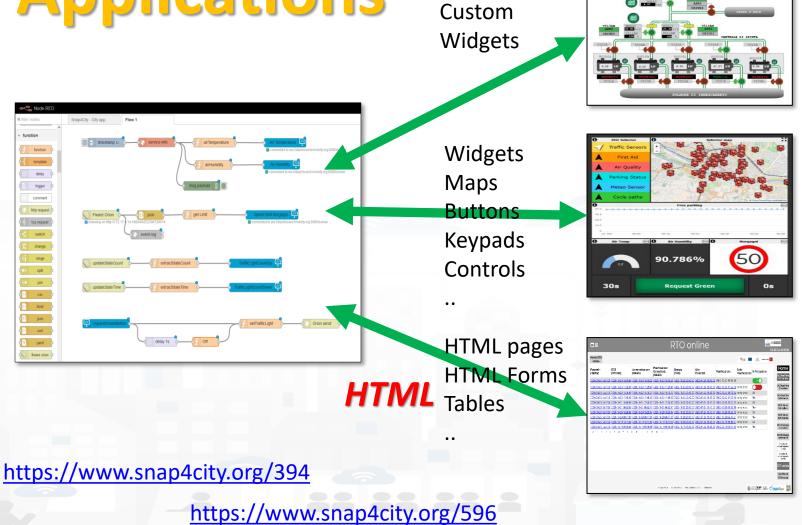

Synoptics

Business Logic



∎≡			I	RTO OI	nline				SFI 23 Oct 18:57:41		■= RTO online			ESSECO 1 1 Oct 15:33:23
Home RTO online								Entering Pagine Tocare	<u>54</u>	L	Home RTO online	<u>****</u>	Q Regione Tascana	
Parametri (TabPar)	DCS (OPC-UA)	Amministrazione (AS400)	Pianificazione Consolidata (AS400)	Energia (PUN)	Altri Parametri	Pianificazione	Esito Pianificazion	e In Produzione	Home DCS Real Time VS Planning		Visualizza ed Edita altri parametri Visualizza e produci Planificazione Consolidata da Planificazione Ipotetica del 01-10-2020 15.32.05 Non de una Planificazione Consolidata ativa			
	36 2020-10-23 18:49:03 36 2020-10-23 17:22:03								VS Planning DCS Real Time Giornaliero		Elenco esecuzioni pianificazione Elenco esecuzioni pianificazione in produzione Avvia Pianificazione			DCS Real Time VS Planning DCS Real Time
2020-09-25 18:47:	36 2020-10-22 18:36:03 36 2020-10-22 17:09:03	2 2020-10-22 17:08:5	59 2020-10-22 17:08:5	<u>9 2020-10-22 23:00:</u>	00 2020-07-24 18:43:	00 2020-10-22 17:09:1	3 completato	Si No	DCS Real Time Settimanale		Uluma data di aggiornamento parametri (TabPar): 25-09-2020 18:47:36 Uluma data di aggiornamento dati da DCS (OPC-UA): 01-0200 10:53:02 Uluma data di aggiornamento dati da maministrazione (ASMO): 22-09-2001 14:1:06			Giornaliero DCS Real Time Settimanale
2020-09-25 18:47:	36 2020-10-21 18:00:02 36 2020-10-21 06:52:02 36 2020-10-20 18:26:02	2 2020-10-21 06:52:4	41 2020-10-21 06:52:4	1 2020-10-21 23:00:0	00 2020-07-24 18:43:	00 2020-10-21 06:52:5	<u>9</u> completato	Si No Si	DCS Marce Giornaliero		Ultima data di aggiornamento dati da pianificazione vendite ipotetica (AS400): 01-10-2020 15:32:05 Ultima data di aggiornamento dati da pianificazione vendite consolidata (AS400): 01-10-2020 09:32:54 Ultima data di aggiornamento altri parametri: 24-07-2020 18:43:00 Ultima data di aggiornamento altri parametri: 24-07-2020 18:43:00			DCS Marce Giornaliero
2020-09-25 18:47:	36 2020-10-20 09:47:03 36 2020-10-19 18:13:03	2 2020-10-19 18:13:0	09 2020-10-19 18:13:0	9 2020-10-20 23:00:0	00 2020-07-24 18:43:	00 2020-10-19 18:13:2	completato	N¢ S	DCS Marce Settimanale DCS Stoccaggi		Salva Parametri			DCS Marce Settimanale
	36 2020-10-19 09:51:0 4 5 6 7 8	-1		18 <u>2020-10-19 23:00:</u>	00 2020-07-24 18:43:	<u>00 2020-10-19 09:51:5</u>	completato		Ciornaliero DCS Stoom gi Settim ale Intel impianto (ton(s) Sinetico di intel impianto (ton(h)		Elenco Parametri Iniziali Algoritmo RTO SODA4.0 (effettuare cambiamenti che saranno utilizzati dalla prossima esecuzione) 5 days (Nº di giorni su cui si vuole fare la pianificazione) [-] 1 alpha_eco (Peso che decide l'importanza relativa di Stock e PUN nella funzione obiettivo) [-]			DCS Stoccaggi Giornaliero DCS Stoccaggi Settimanale Sinottico di sintesi impianto (ton/g) Sinottico di
									RTO online Set Point VS Marce			- x	-	sintesi impianto (ton/h) RTO online
_			Privacy Policy	Cookies Policy Terms and	Conditions Contact o			FIRENZE DISTO	С ^У SNAР4ситу		Privacy Policy Cookies Policy Terms and Conditions Contact us	RENZ		ЧАР 4сіту 😹

HTML pages can


UNIVERSITÀ

DEGLI STUDI

- be dynamically generated from the Proc.Logic / IoT App
- provide forms to produce data to the Proc.Logic / IoT App, also including interactive elements
- collect file from users, and produce files to web and to the system
- have CSS and AJAX controls





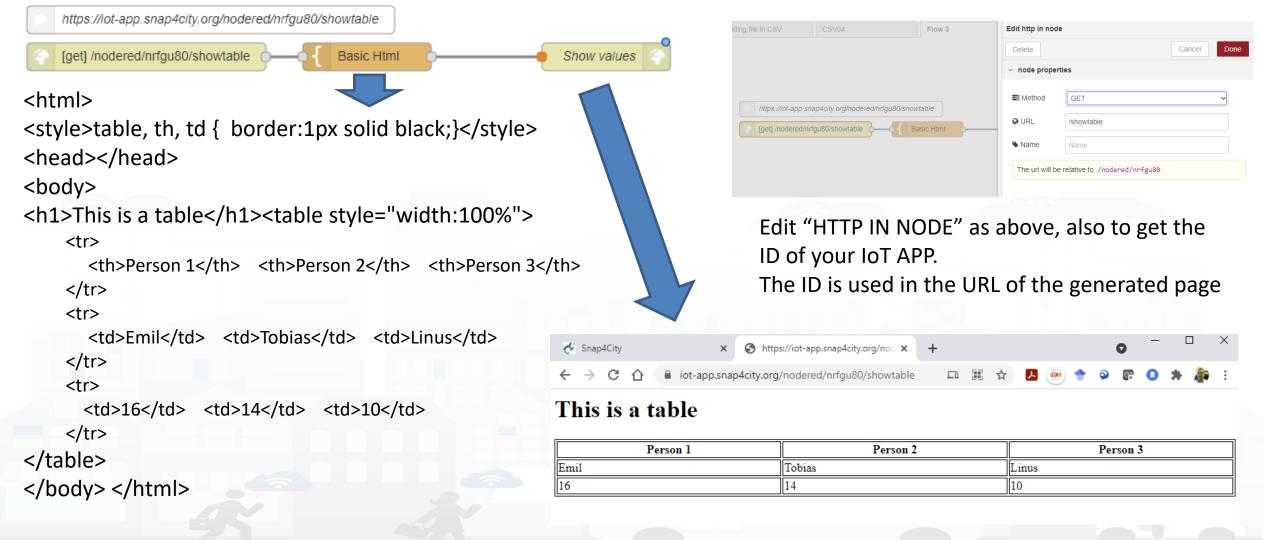





HTML & Tables on Dashboards

- HTML page can expose forms to collect data for the IoT App.
- The table can be
 - constructed with the style you prefer according to HTML, CSS, etc.
 - dynamically generated on the basis of the values you collect/generate, receive, recover from storage in the flow
 - updated by send a message on the node
 - show on Dashboard by using the link (URL) into an External Content Widget
- In alternative there is to the Widget Table with less flexibility





From IoT App to API Get

https://iot-app.snap4city.org/nodered/nrjvmyq/v1/CSS-result

[get] /nodered/nrjvmyq/v1/CSS-result

function http

Function receives:

{"prova":"1","test":"mio"}


It can interpretes the REST call to provide at the next Node the result

Call on Browser:

<u>https://iot-</u>

app.snap4city.org/nodered /<mark>nrjvmyg/v1/CSS-</mark> result/?prova=1&test=mio


The HTML page can be emebedded into External Content widget of a dashboard

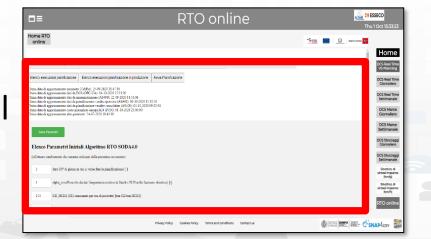



SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES



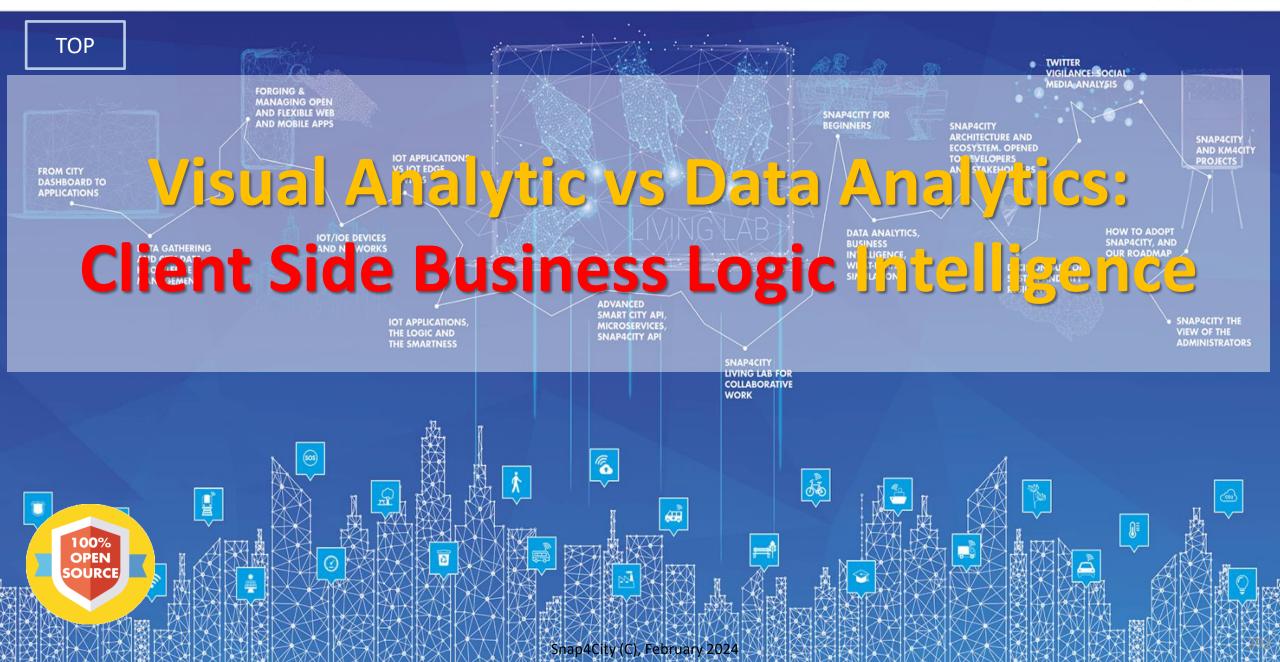







<u>Client</u> Side Business Logic

UNIVERSITÀ DIGLI STUDI FIRENZE DIMENSI DIST

🛠 SNAP4сіту 🧱





Client-Side Business Logic Widget Manual

From Snap4City:

- We suggest you read <u>https://www.snap4city.org/download/video/Snap4Tech-Development-Life-Cycle.pdf</u>
- We suggest you read the TECHNICAL OVERVIEW:
 bttps://www.apaptoity.org/doupload/uidao/S
 - https://www.snap4city.org/download/video/Snap4City-PlatformOverview.pdf
- slides go to https://www.snap4city.org/577
- https://www.snap4city.org
- <u>https://www.snap4solutions.org</u>
- <u>https://www.snap4industry.org</u>
- <u>https://twitter.com/snap4city</u>
- https://www.facebook.com/snap4city
- https://www.youtube.com/channel/UC3tAO09EbNba8f2-u4vandg

Coordinator: Paolo Nesi, <u>Paolo.nesi@unifi.it</u> DISIT Lab, <u>https://www.disit.org</u> DINFO dept of University of Florence, Via S. Marta 3, 50139, Firenze, Italy Phone: +39-335-5688674




https://www.snap4city.org/d ownload/video/ClientSideBus inessLogic-






How the Dashboards exchange data

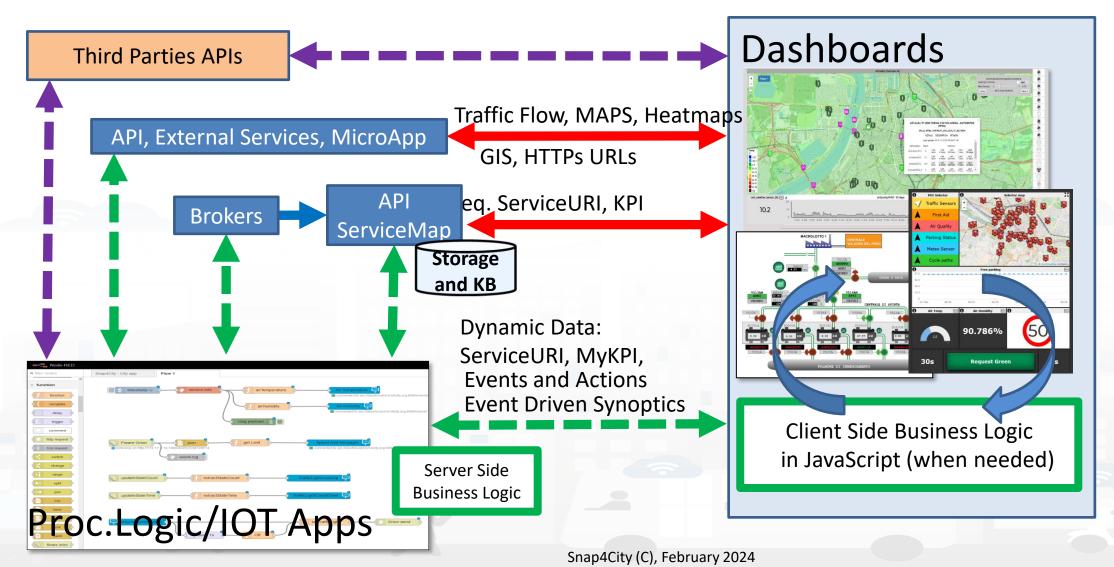





How the Dashboards exchange data

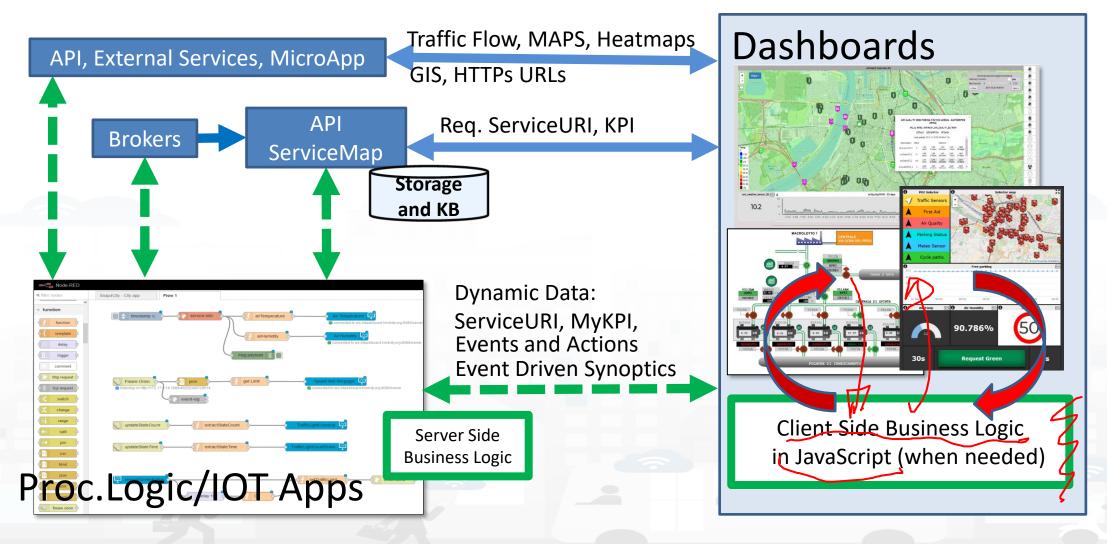






Client Side Business Logic, CSBL

- solution to close the loop from user actions and effects on widgets directly on the client side, on the browser
- Client-Side Business Logic, CSBL, and Server-Side Business Logics, SSBL, may be present at the same time behind a Dashboard and thus behind a Business Intelligence / Smart Application
- CSBL the logic code is formalized in JavaScript only, while in SSBL the logic is formalized in Proc.Logic which is Node-RED plus some JavaScript.
- Developers that would like to develop CSBL have to be authorized, please ask to <u>snap4city@disit.org</u>
- When working in SSBL, widgets can be created
 - and edited from Node-Red Processing Logic.
 - also through the Dashboard Wizard

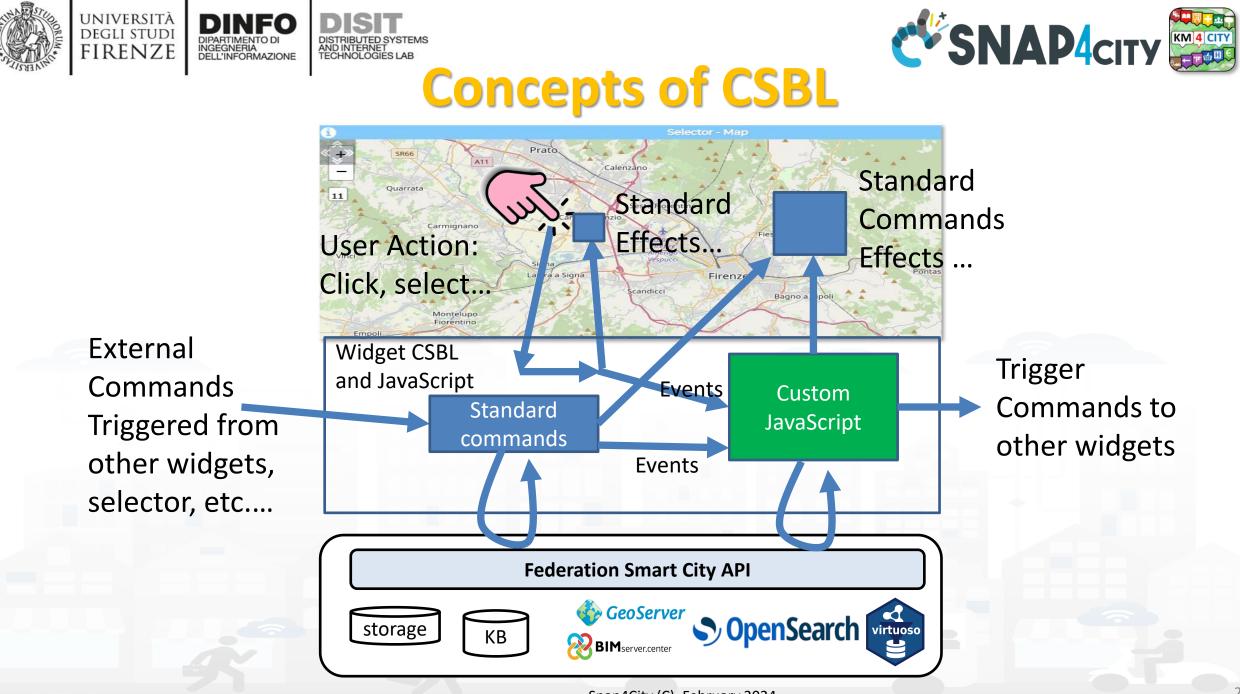


Snap4City (C), February 2024






Custom JavaScript on CK editor of Widget

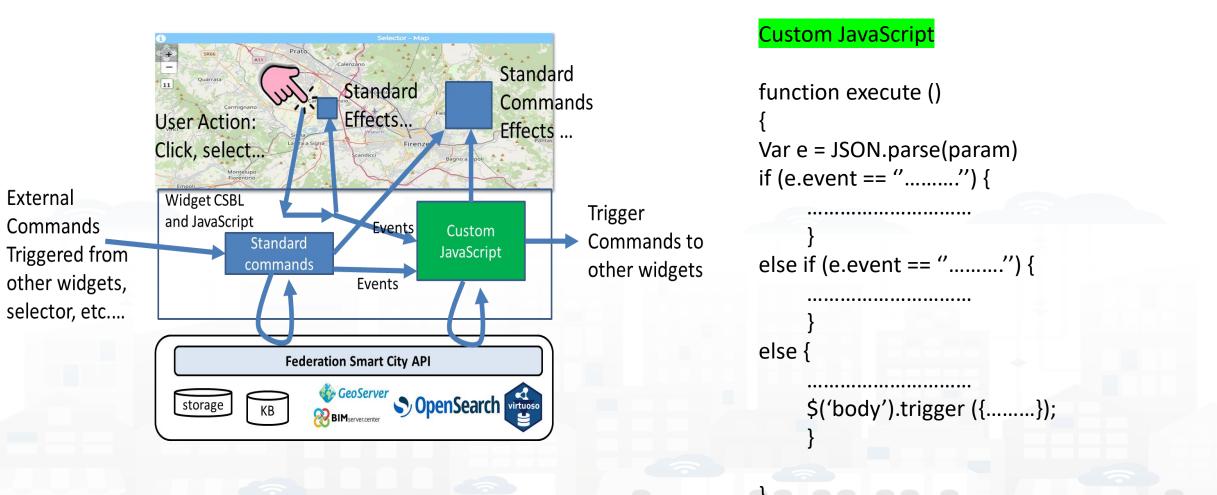






Composition

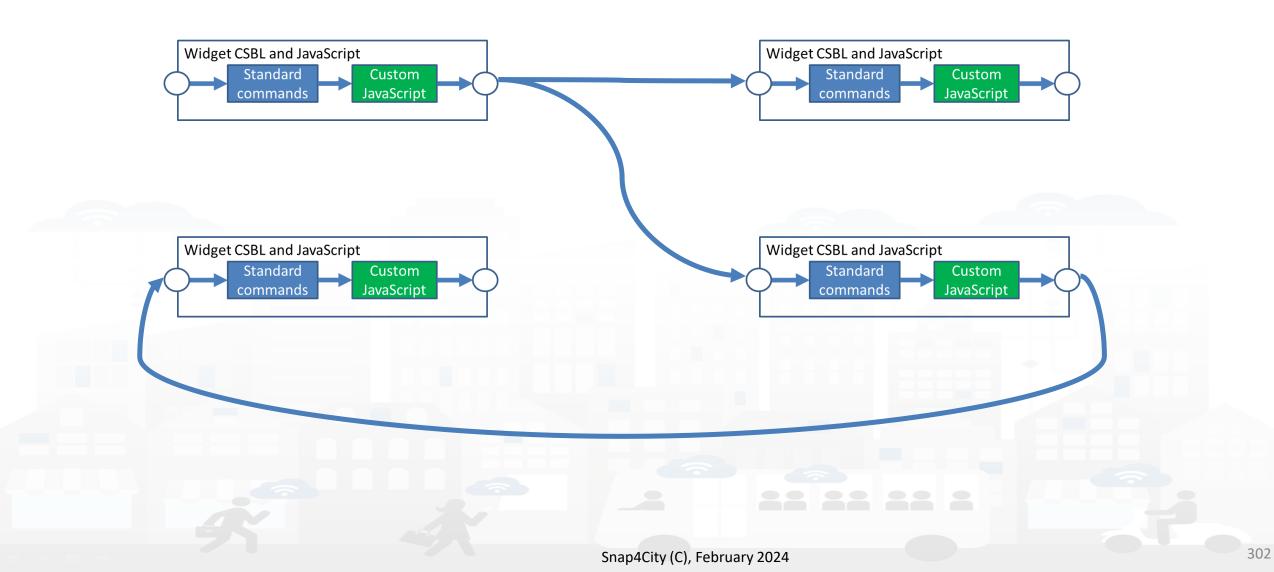





User Actions, Triggers on Risponder

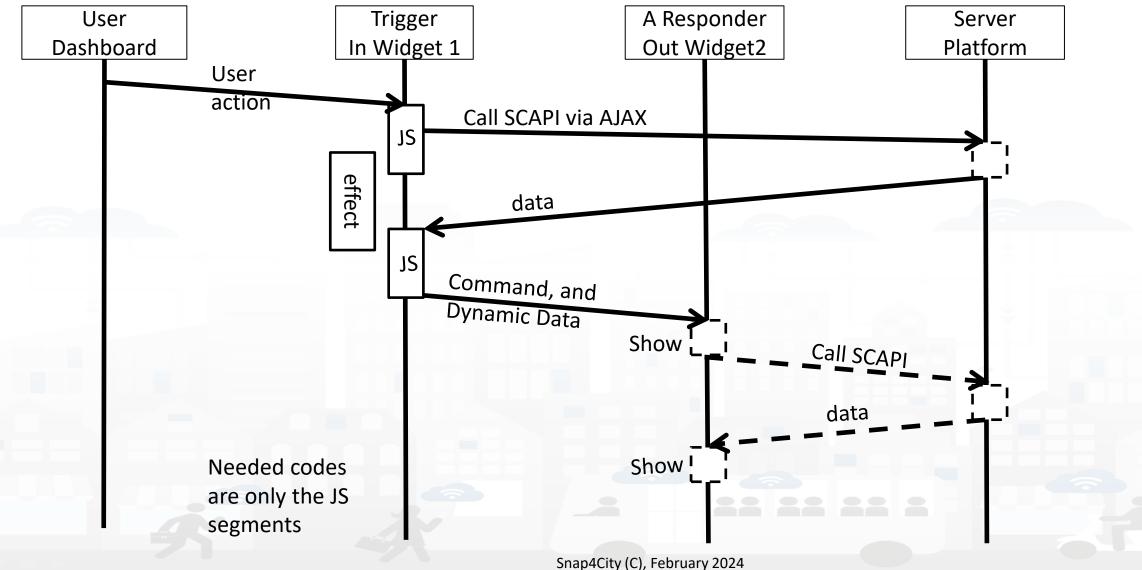







305

User Actions, Triggers on Risponder

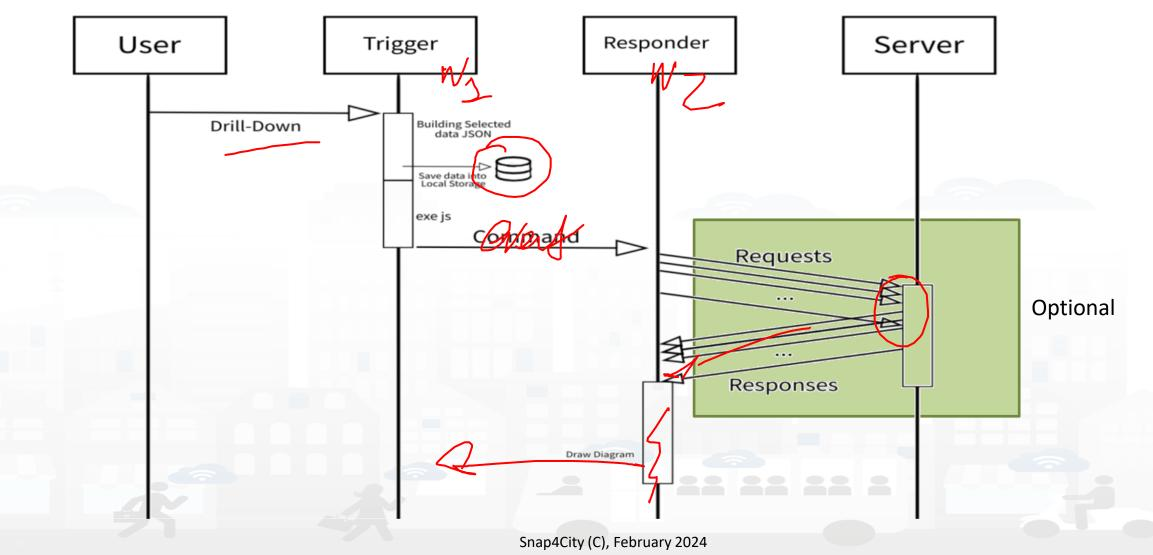





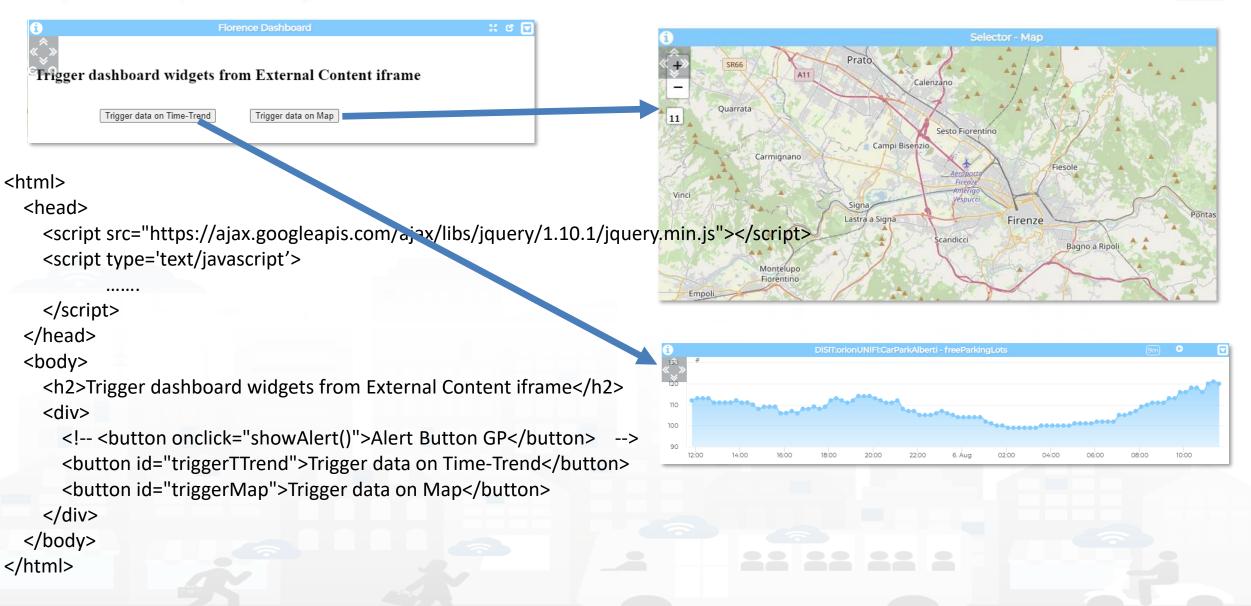







<script type='text/javascript'> var showAlert; var triggerTimeTrend; var triggerMap; \$(document).ready(function () { showAlert = function () { var myText = "Test alert"; alert (myText); \$('#triggerTTrend').click(function (event) { parent.\$('body').trigger({ }); \$('#triggerMap').click(function (event) { parent.\$('body').trigger({ }); }); </script>

Enforcing HTML and JavaScript on MoreOptions of the External Content Widget

Metric NR_a2874619_ebd078 Widget name W.NR_a2874619_ebd078 Widget type WidgetExte v max 1 metrics Context Image: Context vidgetExte vidgetExte vidgetExte vidget.rest color Widget link https://ttv/hd.snap4city.org/ Widget mode Web link vidgetExte vidget.rest color Specific widget properties Font type uuto Widget mode Yes vidget.rest color Specific widget properties Yes vidget.rest color Widget mode Yes vidget.rest color Widget mode Yes vidget.rest color Specific widget properties Yes vidget.rest color Widget mode Yes vidget.rest color Specific widget.rest color Yes vidget.rest color Widget mode Yes vidget.rest color Widget mode Yes vidget.rest color Specific widget.rest color Yes vidget.rest color Specific widget.rest color Yes vidget.rest color Soom a laways vidget.rest color 105 System in the widget.rest color Sidesument/secondalist.com/sjax/lbs/guery/1101/guery.min. System rest Sidesument/secondalist.com/sjax/lbs/guery/1101/guery.min. South rest Sidesument/secondalist.com/sjax/lbs/guery/1101/guery.min. System rest Sidesument/secondalist.com/sjax/lbs/guery/1101/guery.min.	Widget category	Data viewer		Title	Florence Da:	Backgound color	rgba(2
Widget name W_NR_a2874619_ebd078_2573 Widget type WidgetExte Widget type WidgetExte Netric description Period Header color rgba(2 Height 41 Widget ink https://ttv/hd.snap4city.org/ Metric description U/M U/M U/M position Specific widget properties Widget mode Web link Finable Yes Enable Yes Controls Controls Yes Controls Controls 105 Yes Controls Yes Insert HTML text to be shown in the widget. Please save your so by clicking on the save button on the bottom. Vidiget mode Web link U/M U/M U/M <td>Metric</td> <td>NR_a2874619_eb</td> <td colspan="2" rowspan="2"></td> <td></td> <td>Content font color</td> <td></td>	Metric	NR_a2874619_eb				Content font color	
Context Widget link https://rttvhd.snap4city.org/ Metric description U/M U/M U/M U/M U/M U/M U/M Show header Yes Enable Yes fullscreen in a popup controls Contorls yisbility Zoom Always 1 Zoom fullscreen in a popup controls Contorls yisbility Top left controls yosition Top left Som Top le	Widget name	w_NR_a2874619			rgba(5	Header text color	rgba(2
widget link https://rttvhd.snap4city.org/ Metric description //// Specific widget properties Font type (autosuggestion) Widget mode Web link * Fullscreen in new tab a popup Fullscreen in the widget. Please save your so by clicking on the save button on the bottom. Zoom Always * Zoom factor (%) rontots (%) 105 position Top left * Styles * Format * controls for left * Styles * Format * styles Format * Controls / (%) styles Format * Chinib styles Format * Controls / (%) styles Format * Controls / (%) styles * Format * Controls / (%) <td>Widget type</td> <td>widgetExte 🗸</td> <td>max 1 metrics</td> <td>Period</td> <td>~</td> <td>Refresh rate (s)</td> <td></td>	Widget type	widgetExte 🗸	max 1 metrics	Period	~	Refresh rate (s)	
widget link https://ittvhd.snap4city.org/ Metric description //// Specific widget properties Font type (autosuggestion) Widget mode Web link * Enable Yes * Enable Yes * fullscreen in a popup 105 controls Always * Zoom Top left * 105 position Styles * Format * script specific triggerMap; Styles * format * Solutions Styles * format * Controls (%) Styles * format * Styles * Solutions 105 Styles * Format * Styles * Styles * Styles * Format * Styles * Styles * Sty	Context		Θ	Height	41 ¥	Width	31 ¥
Metric description Specific widget properties Widget mode Web link ∨ Enable Yes ∨ fullscreen in fullscreen in fullscreen in fullscreen in controls controls zoom Always ∨ zoom fullscreen in response 105 y clicking on the save button on the bottom. Image: State of the save button of the save button on the bottom. Image: State of the save button of the save button on the bottom. Image: State of the save button of the save button of the save button on the bottom. Image: State of the save button of the sav	Widget link	https://rttvhd.sna	ap4city.org/	U/M		U/M position	
Widget mode Web lini ↓ Enable Yes ↓ fullscreen in a loopup zoom controls visibility zoom factor (%6) 105 Som Top left ↓ zoom controls position Top left ↓ Som Top left ↓ Scipt type=text/javascript> var triggerMap; \$(document).ready(function () (showlet = function () {	Metric description				Yes 🗸	Font type	Auto
position <pre> chead></pre>	Enable fullscreen in new tab Zoom Always	 Enable fullscreen in a popup Zoom factor 		Editor Here you car by clicking or	n insert HTML text to n the save button or n (n) (n) (n) (n)	n the bottom.	
var triggerMap; \$(document).readyfunction () { showAlert = function () {	Enable fullscreen in new tab Zoom Always visibility Zoom Top left	 Enable fullscreen in a popup Zoom factor (%) 		Editor Here you car by clicking or K C (B I	n insert HTML text to n the save button or ⓐ ि ि ⓐ < A ∐ ×, × ²] ;= :	n the bottom.	
	Enable fullscreen in new tab Zoom controls visibility Zoom controls	 Enable fullscreen in a popup Zoom factor (%) 		Editor Here you can by clicking of B I Styles <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html> <html< td=""><td>insert HTML text to the save button or the save button of the s</td><td>s.com/ajax/libs/jquery/</td><td>Ω</td></html<></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html></html>	insert HTML text to the save button or the save button of the s	s.com/ajax/libs/jquery/	Ω


});


});



Formalization of SSBL on In Widget More Options

CK EDITOR

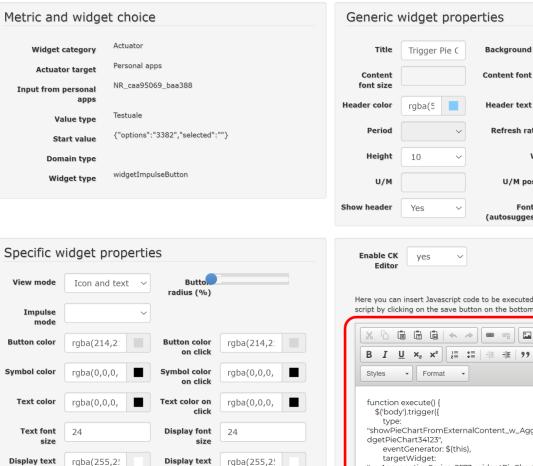

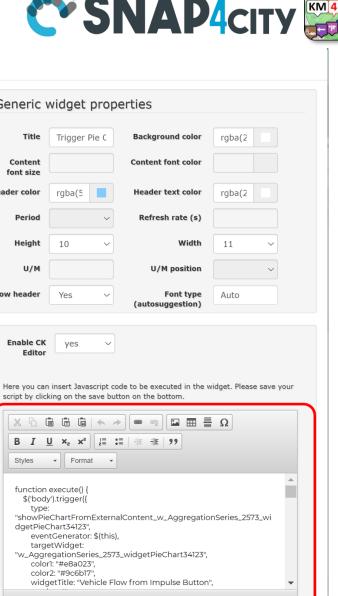

Snap4City (C), February 2024

color on click

Displa,

Display

radius (%)

height (%)

Modify widget

Widget category

Actuator target

apps

Value type

Start value

Domain type

Widget type

rgba(0,0,0,

rgba(0,0,0,

rgba(0,0,0,

24

View mode

Impulse mode

Button color

Symbol color

Text color

Text font

Display text

background

size

color

Display

color

Display

width (%)

Input from personal









```
$('#triggerMap').click(function (event) {
        let coordsAndType = {};
        coordsAndType.eventGenerator = $(this);
        coordsAndType.desc = "CarPark";
        coordsAndType.query =
"https://servicemap.disit.org/WebAppGrafo/api/v1/?selection=43.64471;11.005751;43.89471;11.505751&categories=Car park&maxResults=200&format=j
son&model=CarPark";
        coordsAndType.color1 = "#ebb113";
        coordsAndType.color2 = "#eb8a13";
        coordsAndType.targets = "w_DISIT_orionUNIFI_CarParkAlberti_2573_widgetTimeTrend33703"; // the Time Trend Widget ID once pop up open
        coordsAndType.display = "pins";
        coordsAndType.queryType = "Default";
        coordsAndType.iconTextMode = "text";
        coordsAndType.pinattr = "square";
        coordsAndType.pincolor = "#959595";
        coordsAndType.symbolcolor = "undefined";
        // coordsAndType.altViewMode = altViewMode;
        coordsAndType.bubbleSelectedMetric = "";
        parent.$('body').trigger({
         type: "addSelectorPin",
         target: "w_Map_2573_widgetMap33705", // the Time Trend Widget ID of the event performed on clik
          passedData: coordsAndType
       });
      });
```





Trigger Time trend

\$('#triggerTTrend').click(function (event) {
 parent.\$('body').trigger({

type:


"showTimeTrendFromExternalContentGis_w_DISIT_orionUNIFI_CarParkAlberti_2573_widgetTimeTrend33703",

```
eventGenerator: $(this),
    targetWidget: "w_DISIT_orionUNIFI_CarParkAlberti_2573_widgetTimeTrend33703",
    range: "7/DAY",
    color1: "#34eb6e",
    color2: "#114a23",
    widgetTitle: "Free Parking Lots data from External Content",
    field: "freeParkingLots",
    serviceUri: "http://www.disit.org/km4city/resource/iot/orionUNIFI/DISIT/CarParkPal.Giustizia",
    marker: "",
    mapRef: "",
    fake: false
  });
});
```





Synchronization Multiple Time Trends

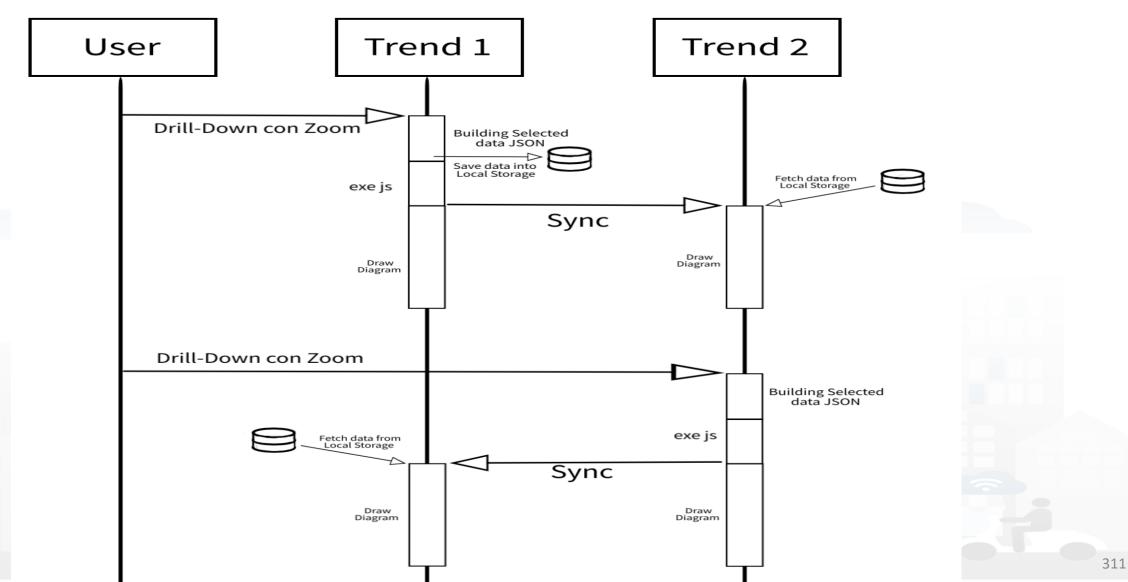





Client Side Business Logic, CSBL

- IN Widgets are those that are prepared to receive some actions/commands from the Users. For example, a click on a button, a click on the map, etc. These IN Widgets can be regarded as Virtual Sensors.
- **OUT Widgets** are those that are prepared to provide some changes to be shown into the Users' interface. For example, a view of a barseries on some other data, a rendering of a time series, a rendering of a set of Entities on the map, etc. These OUT Widgets can be regarded as Virtual Actuators.
- **IN/OUT Widgets** are those that provide capabilities of both IN and OUT Widgets. For example, a map can receive an IN command about a selected PIN, and can receive an OUT command to show a selection of services, devices, etc. These IN/OUT Widgets can be regarded as Virtual Sensors/Actuators.





Client Side Business Logic Example











First BI Example

Mon 10 Apr 12:00:40



https://www.snap4city.org/dashboardSmartCity/view/Gea.php?iddasboard=MzcyNA==



Example: From Map to Graphs (spatial drill down)


1) Select the area of interest on map

UNIVERSITÀ

degli studi FIRENZE

INGEGNERIA DELL'INFORMAZIONE AND INTERNET TECHNOLOGIES LAB

- 2) Select the sensors kind of interest
- 3) Drill down on map
- 4) The JavaScript CSBL on Map will send data to the programmed Widgets. In this case, arrowed in RED

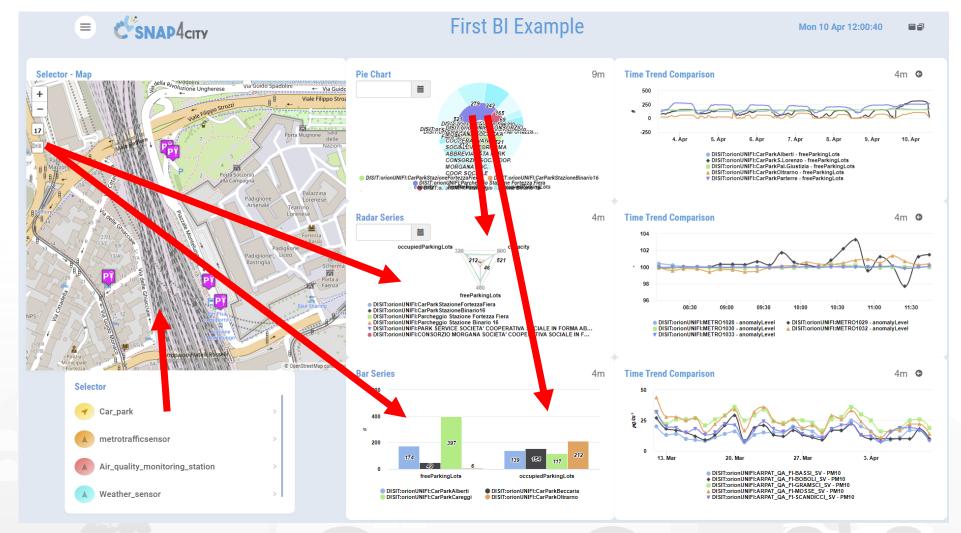






Example: From Data Graphs to Graphs (drill down)

- 1) Click on the Donut element
- 2) The JavaScript CSBL
 on the Donut Widget
 will send commands
 to the programmed
 Widgets to focus on
 selection, as
 highlighted by the
 red arrows

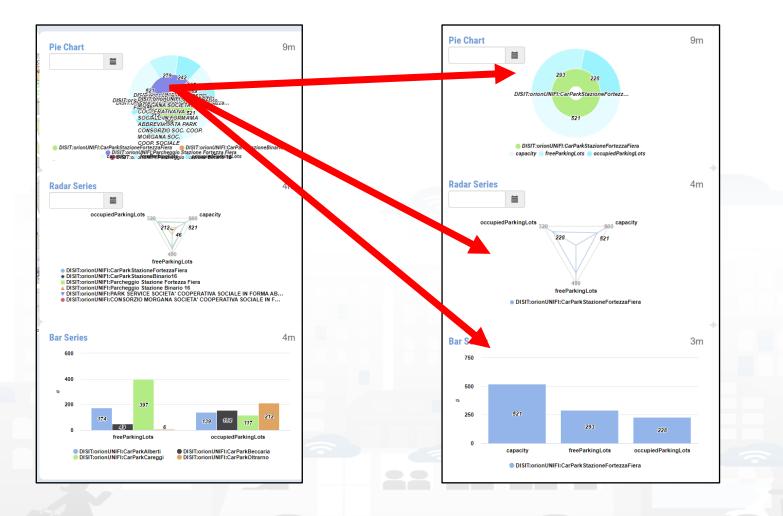






9m

4m

1m

- 1) Click on the Legenda of Bar Series
- 2) The JavaScript CSBL on the Bar Series will send commands to the programmed Widgets to remove the unselected devices, as highlighted by the red arrows

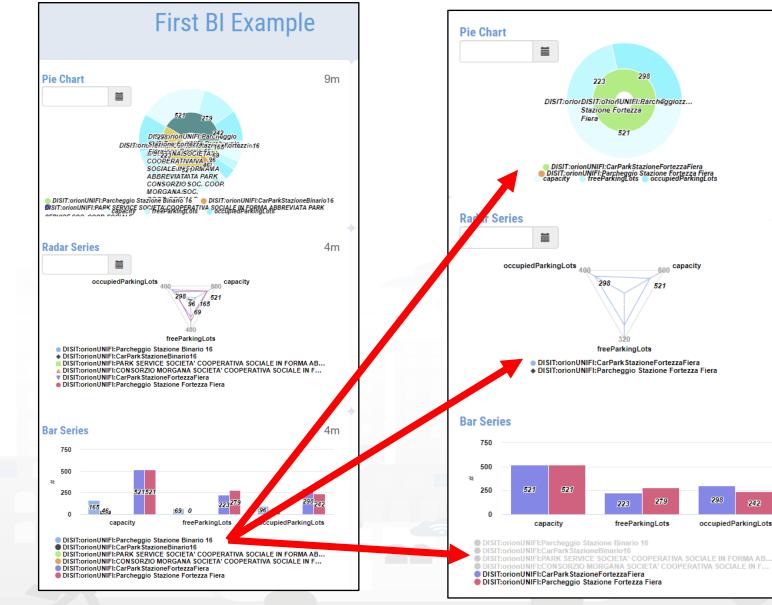


Snap4City (C), February 2024





Other Actions

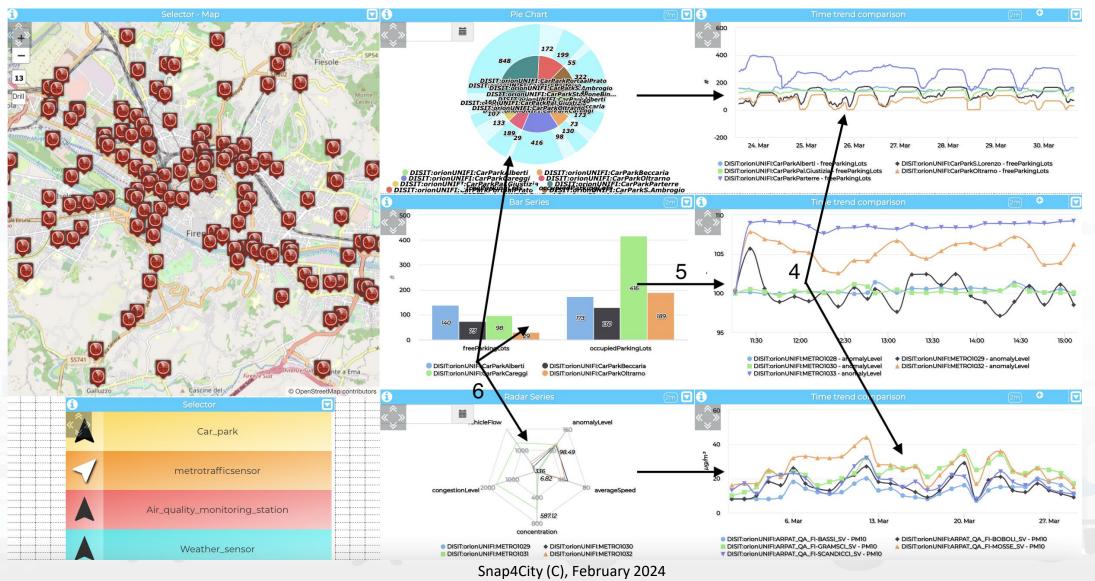





Example Triggers **CSNAP4**city



IN and IN/OUT Widgets	Users' Action Description and effects					
widgetTimeTrend	Drill-Down on time interval selection (zoom), providing, SURI, value name, start and end time stamp					
	Send Reset Drill-Down					
	Click on a single time instant, providing time stamp, SURI and value name					
	Click on a generic point on the map, providing coordinates (under development, currently it only works for SSBL)					
widget (App (multidataman)	Click on a PIN, providing coordinates and ServiceURI of the clicked PIN					
widgetMap (multidatamap)	Select the bounding box area shown on the map, and the zoom level in order to perform geographical Drill-Down on the entities (devices identified by SURIs, Points					
	of Interest etc.) which are currently shown on map					
	Click on a sector that identifies the name of a metric, providing: value, timestamp, entity name (from which the SURI can be reconstructed) value name, value type					
	and value unit					
widgetPieChart	click on a sector that identifies a device ID or MyKPI ID, providing: value, timestamp, entity name (from which the SURI can be reconstructed) value name, value					
	type and value unit					
	Click on legend, providing the status (e.g.: "checked" or "unchecked") of the metric/SURI which has been clicked (under development)					
widgetDerCories	Click on a bar, providing: value, timestamp, entity name (from which the SURI can be reconstructed) value name, value type and value unit					
widgetBarSeries	Click on legend, providing the visibility status of each metric/SURI					
	Click on a radar axis related to a specific metric of a specific device, providing: value, timestamp, entity name (from which the SURI can be reconstructed) value					
widgetRadarSeries	name, value type and value unit					
	Click on legend, providing the visibility status of each metric/SURI					
	Drill-Down on time interval selection (zoom), providing: start and end time stamp, and list of SURI. It is also possible to program the synchronization of multiple					
widgetCurvedLineSeries (multi	widgetCurvedLineSeries widgets.					
series)	Click on a single time instant, providing: time stamp and list of objects including SURIs and related entity names and value names					
series	Click on legend, providing the visibility status of each metric/SURI					
	Send Reset Drill-Down					
widgetDeviceTable	Click on the action buttons, providing the action type, the corresponding SURI and a list of attributes with their corresponding values					
widgetImpulseButton	Click on button as a trigger (no parameters are provided)					
widgetOnOffButton	Click on button, providing the new status					
widgetKnob	Drag on knob, providing the value selected on the knob					
Widgetthiob	Click on minus and plus action					
widgetNumericKeyboard	Click on the confirm button, providing the numeric value typed on the keyboard					
widgetEventTable	Click on the action buttons, providing the action type, the corresponding event SURI and the ordering criteria					
widgetExternalContent	It can support HTML pages and SVG Synoptics, in addition to JavaScript, so that it can perform a wide range of actions that can be defined in the HTML/SVG/JS code					
	by the users.					





Typical Triggered Events

- SURI, List of SURI
 - Variable: Value Name (or metric)
- DateTime: date and time instant
- DateTime Interval: fromdatetime, todatetime
- ResetCommand
- GPS Coordinates, Bounding Box: a couple of coordinates
- Action (status | value)
- Etc.







OUT and IN/OUT Widgets	Commands which are ready to be executed from Widgets according to JavaScript in some IN Widget					
widgetPieChart	Receive a JSON containing a list of SURI, metric names and/or values, and show their corresponding values on a Pie Chart graph.					
widgetRadarSeries	Receive a JSON containing a list of SURI, metric names and/or values, and show their corresponding values on a Radar/Kiviat graph.					
widgetBarSeries	Receive a JSON object containing a list of SURI, metric names and/or values, and show their corresponding values on a Bar graph.					
widgetSingleContent	 Receive a SURI and a metric name, or a value, or a text string, and show the corresponding value. Receive and show a HTML/JS page 					
widgetSpeedometer	Receive a SURI and a metric name, or a value, and show the corresponding value on a speedometer graph.					
widgetGaugeChart	Receive a SURI and a metric name, or a value, and show the corresponding value on a gauge graph.					
widgetTimeTrend	Receive a SURI and a metric name, or a value, and show the corresponding time-series on a line, spline, area or stacked area graph.					
	Receive reset zoom					
widgetTable	Receive a JSON containing a list SURI, metric names and/or values, and show the corresponding time-series on a HTML static table.					
	Receive start datetime, end datetime without change sources IDs					
	Receive a JSON containing a list of SURI, metric names and/or values, and show the corresponding time-series on a line, spline, area or stacked area					
widgetCurvedLineSeries	graph.					
Mugetculveulmesenes	Receive start datetime, end datetime without change sources IDs					
	Receive reset zoom					
widgetDeviceTable	Receive a JSON containing a list of SURI representing IoT devices, and show their related attributes and values on an interactive table which provides action buttons.					
widgetEvent	Receive a JSON containing a list of SURI representing events as virtual devices, and show their related attributes (e.g., start and end date) and values					
	on an interactive table which provides action buttons.					
widgetMap	Receive a JSON containing a list of SURI or entities (such as heatmaps, categories of Points of Interest etc.) and show them on an interactive map					
	clickable markers, dynamic SVG pins, traffic flows, heatmaps etc.					
widgetOnOffButton	Receive a JSON containing a list of SURI or entities (such as heatmaps, categories of Points of Interest etc.) and show them on an interactive map is clickable markers, dynamic SVG pins, traffic flows, heatmaps etc. Receive and show a value representing the status Receive and show a value					
widgetKnob	Receive and show a value					





Typical commands received

- SURI, List of SURI
 - Variable: Value Name (or metric)
- DateTime: date and time instant
- DateTime Interval: fromdatetime, todatetime
- ResetCommand
- MyKPI, List of MyKPI
- GPS Coordinates, Bounding Box: a couple of coordinates
- Action (status | value)
- Etc.





CSBL: Useful Functions

- functions on Actions JavaScript segments:
- Open a New Dashboard: openNewDashboard()
- Get parameters: getParams()


As a result, it is possible to activate in a new dashboard some actions on specific elements.





Develop: Client Side Business Logic Dashboards with Synoptics




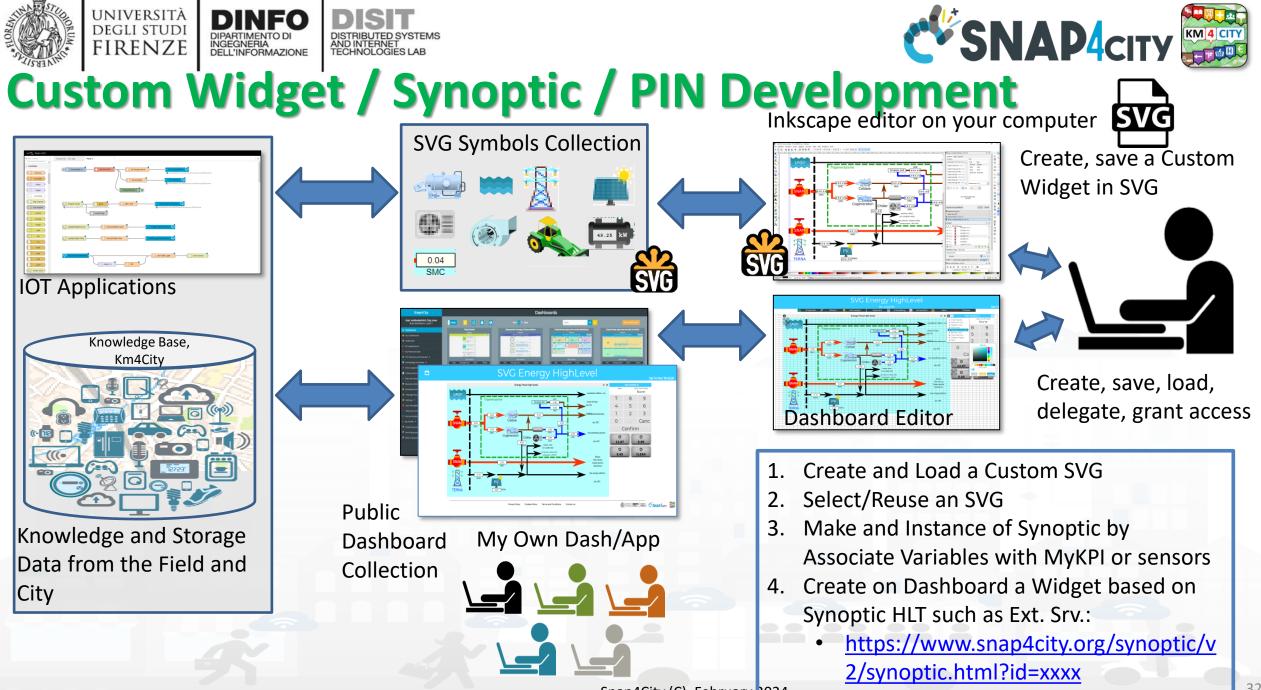





Synoptic for Client Side Business Logic

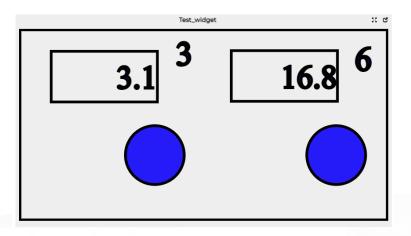

In the SVG puts some code:

-- at the button for example OnClick(),triggering an event-- at the text box to write the value in the box, for example:

TextBoxWrite3(.....) TextBoxWrite6(.....)


In the JavaScript of the External Content Widget hosting the SVG html code The programmer can: -- exploit the functions TextBoxWrite3(.....) TextBoxWrite4(.....) -- receive the Triggered event and write a JavaScript with a corresponding action The same SVG may have some elements working with respect to Server, IoT App, etc., and also with

Snap4City (C), February 2024

Client Side Business Logic






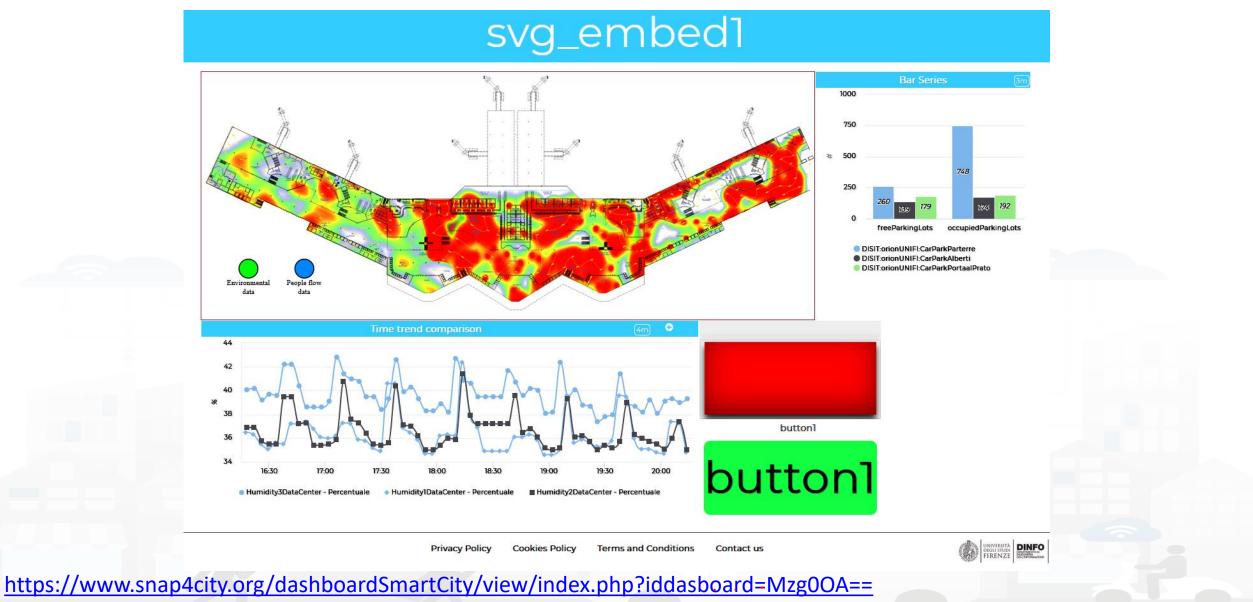

Snap4City (C), February 2024

SNAP4city

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES

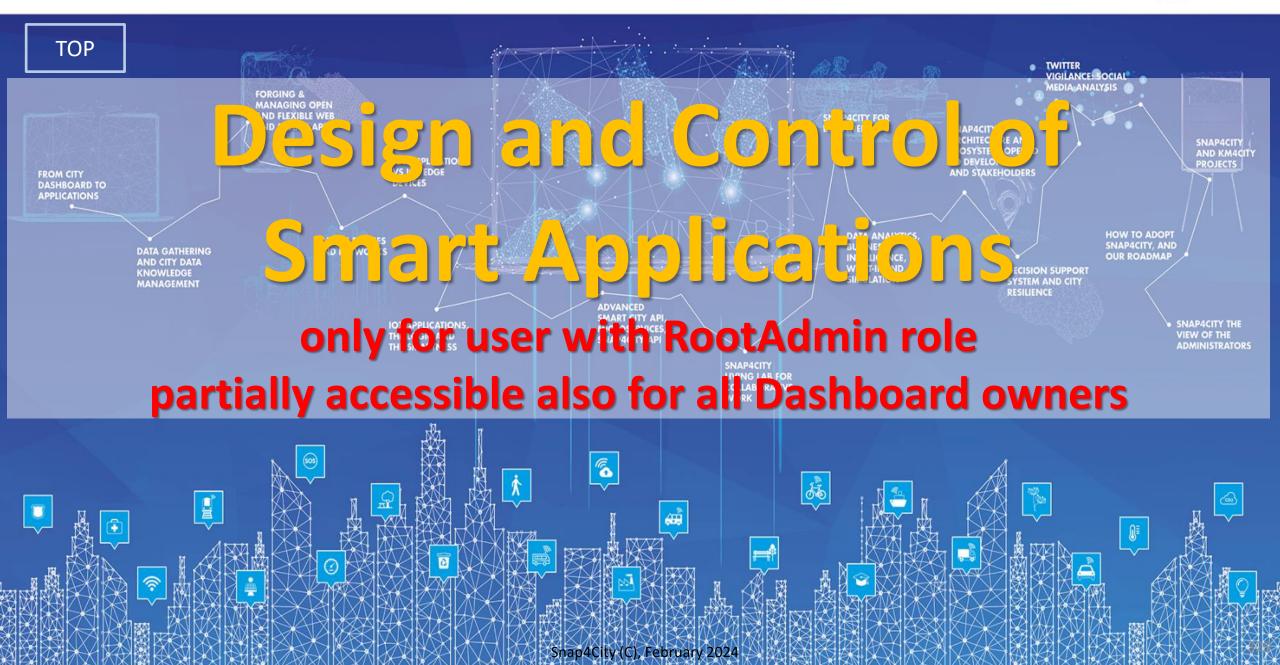






Semantic Reasoning on Smart Applications

Brokers

Dashboards have relationships with

- Org. at which they belong
- Widgets with
 - data they use, and each of which
 - is connected with the Knowledge Base
 - May be: device, kpi, etc.
- IoT Apps with
 - Data they use
 - Data Analytic
 - Widget they control
- Processes are (not in the simplified graph): use
 - Data, Broker, Data Analytic, IoT Directory, Device, IoT App, UserInterface
 - owned, and delegated in some manner from the owner to other users

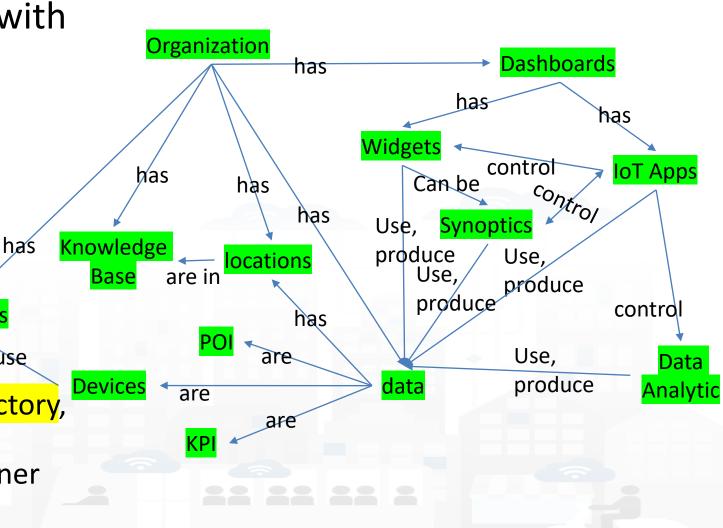





Snap4City		Dashboards (P	ublic by (ORG))				
User: roottooladmini, Org: DISIT Role: RootAdmin, Level: 7 Locour My Snap4City.org My Snap4City.org My Dashboards (Public) My Dashboards in All Org. My Dashboards in All Org. My Dashboards in My Organization My Dashboards in My Organization My Dashboard Dev Kibana My Data Dashboard Kibana	Cards Image:		Venaria	a × Managemer		JIII. I MA IL JA	
 B Extra Dashboard Widgets ▼ 		Ownership Visi	l bility Delegations	Group	Accesses	Strecture	Organization
				New owner us	ername	ownership	Confirm
		Sna	ap4City (C), February 202	4			





Dashboard Structure and Components


- 4 Widgets
- Button
 - It is the image
- Curved LineSeries
 - Set of data....
- Curved LineSeries
 -set of data...
- External Content
 - With synoptic

	Management						
Ownership	Visibility	Delegations	Group Delegations	Accesses Trends	Structure	Organization	Thumbna
Link to Graph							
Dashboard Hierard	:hy						
	oring Cross Road ' ectories legenda -	Venaria - (AXIS Camer - <i>(widgetButton)</i>	ra)				
 Use Data: sensor: Query: Link to Link to 	: CrossVenaria2Ve	es per hour - <i>(widget(</i> shicleFlowTrajectories [:] org/km4city/resource/	V2	CrossVen			
 Use Data: sensor: Query: Link to Link to 	VenariaConteggi	and totals per hour - (io org/km4city/resource/	-				
 Use Data: Query: 	https://www.snap Data Inspector (r	- per hour - <i>(widgetEx</i> p4city.org/synoptics/v/ root)	*	5648299			





For All Dashboard owners: Graph and Structure

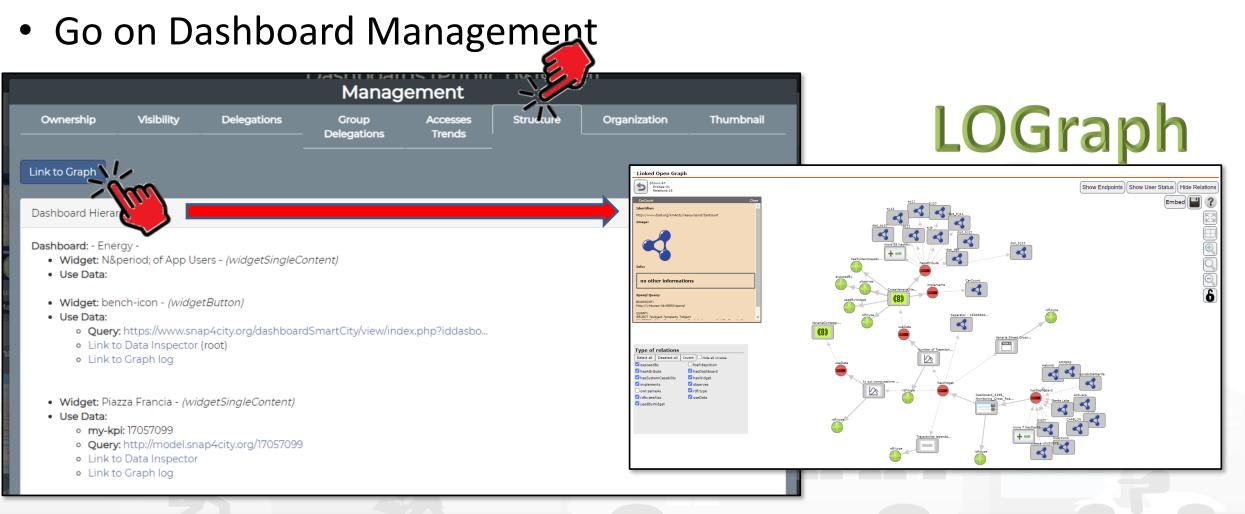



Snap4City (C), February 2024



Monitoring Cross Road Venaria - (AXIS Camera)

Wed 10 Nov 18:50:53

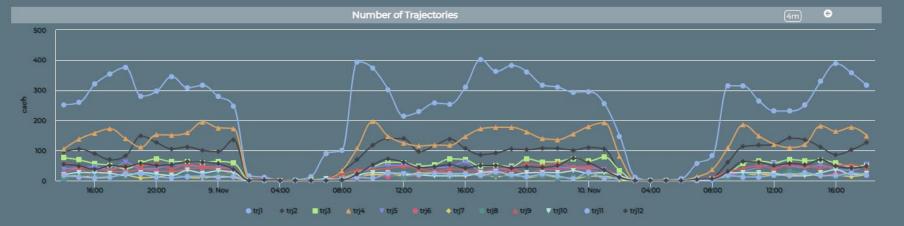




Venaria Street Cross - Synoptic 🗧 😤 🖸

9 127 40

27

47

149

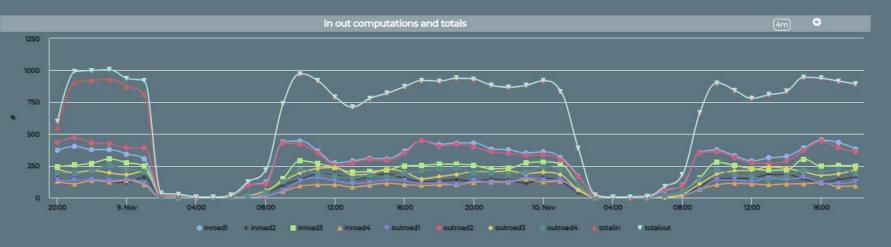

https://www.snap4city.org/dashboardSmartCity/view/index.ph

p?iddasboard=MzI5Ng==

Privacy Policy Cookies Policy Terms and Conditions Contact us









Hide Relations

Linked Open Graph



Type of relations					
Select all	Deselect all	Invert Hide all inverse			
exposed	By	foaf:depiction			
🗹 hasAttrib	oute	🗹 hasDashboard			
🗹 hasSyste	emCapability	🗹 hasWidget			
🗹 impleme	nts	observes			
owl:sameAs		df:type			
rdfs:see/	Also	🗹 useData			
🗹 usedByW	Vidget				

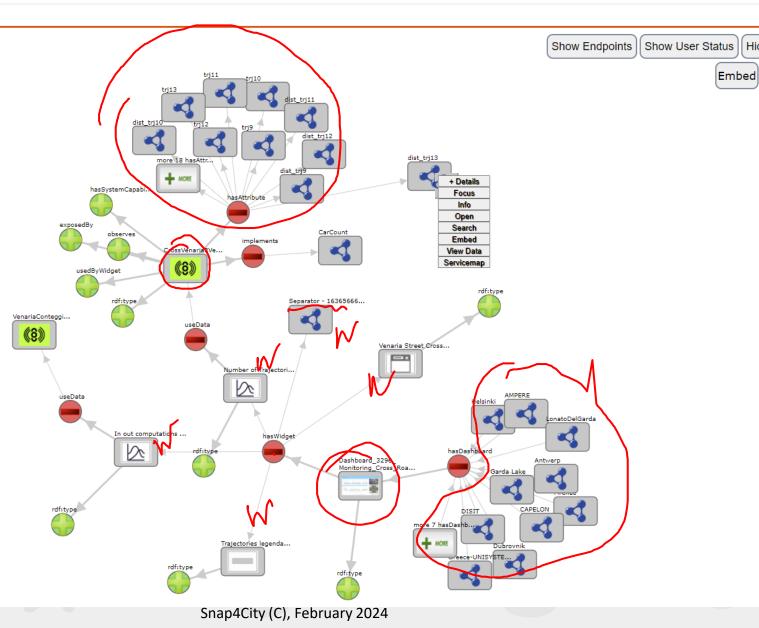

Karlstad Street Lights CAPELON





KM 4 CITY

Sun 28 Nov 20:02:16

(3m) 😌

28 Now

(3m) 🚱

28. Nov

3m)

14. Nov


ΘΘ

CAPELON

27 N/M

27. Nov

72FFFEBAADD2 - phase2ActivePi

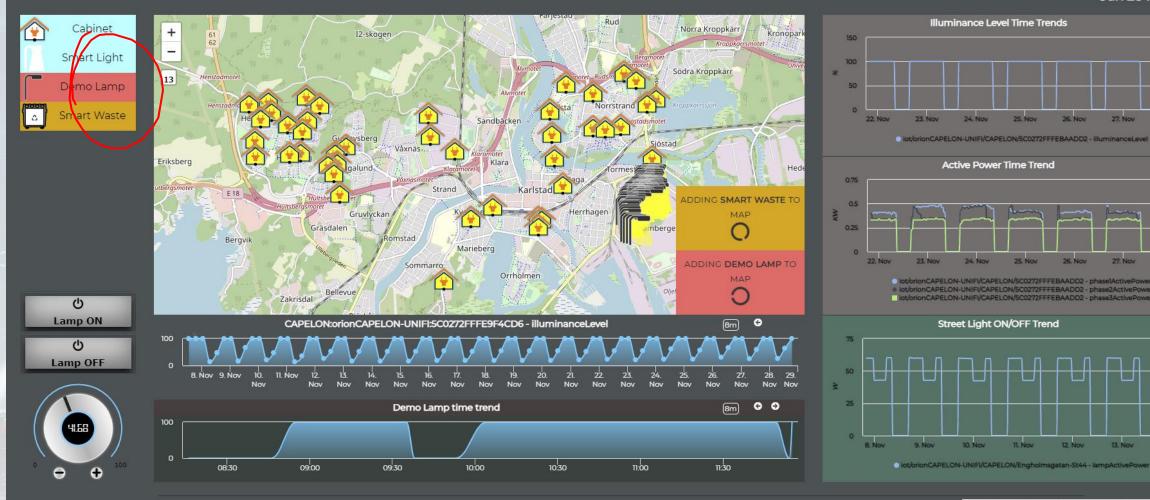

Terms and Conditions Contact us



12 Not

10 New

15 NOV


Snap4City (C), February 2024

https://www.snap4city.org/dashboardSmartCity/view/index.php?iddasboard=MzI5NQ==





Linked Open Graph

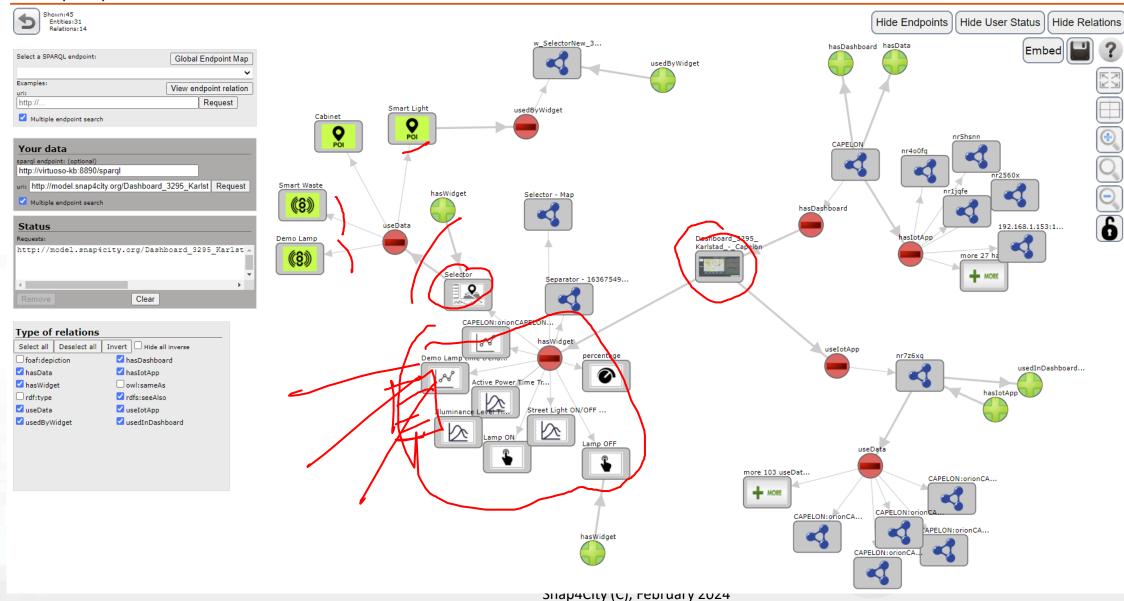







342

https://www.snap4city.org/dashboardSmartCity/view/index.php?iddasboard=MTk2Mw==

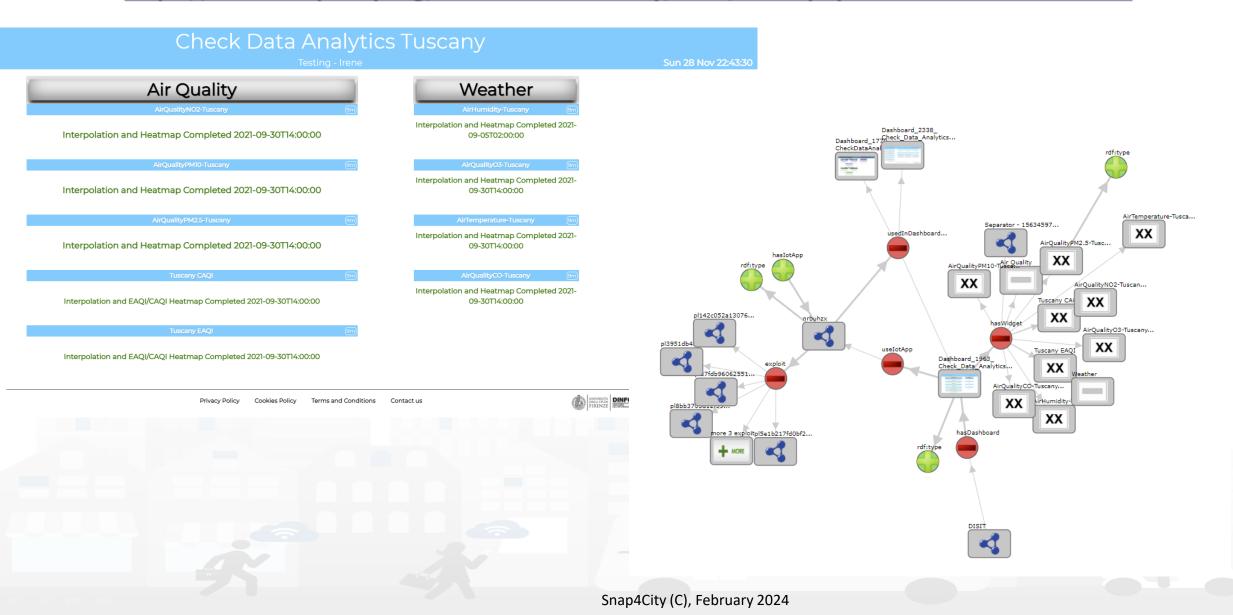

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CSNAP4INDUSTRY

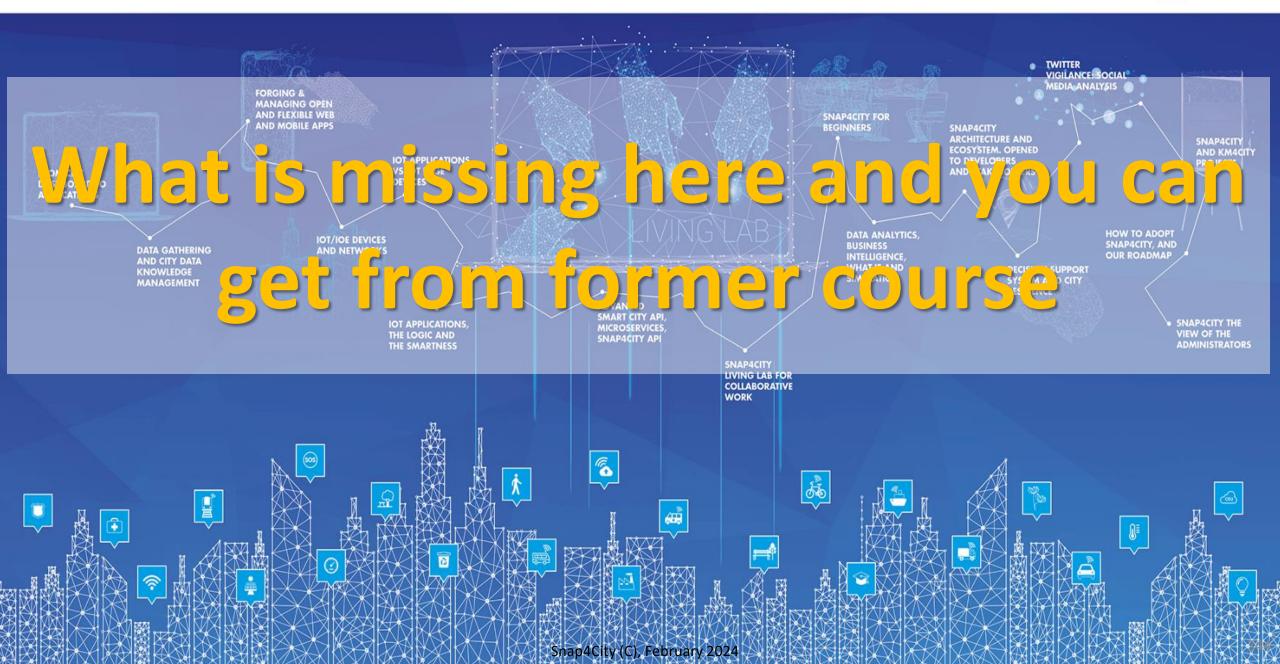





What is missing here and you can find in the former course <u>https://www.snap4city.org/577</u>

- Data Streams from partecipatori, Mobile App
- Data streams from Mobile vehicles and smart phones Devices
- Data Ingestion via Web Scraping
- Data stream from TV Cameras, TV Cam Manager
- From external API to Node-RED node/block automatically
- Social Media interoperability

- Another Complete Example
- BlockChain models and devices in Snap4City (new feature)
- Orion Broker:
 - Services/SrvPath and Multitenant
- External and Internal Brokers,
 - External Broker harvesting
- Managing Node-RED on edge from cloud
- More on: Security of Snap4City Stack from device to dashboards
- VM based installation of Snap4City
- ETL: Penthao Kettle interoperability


https://www.snap4city.org/944

On Line Training Material (free of charge)








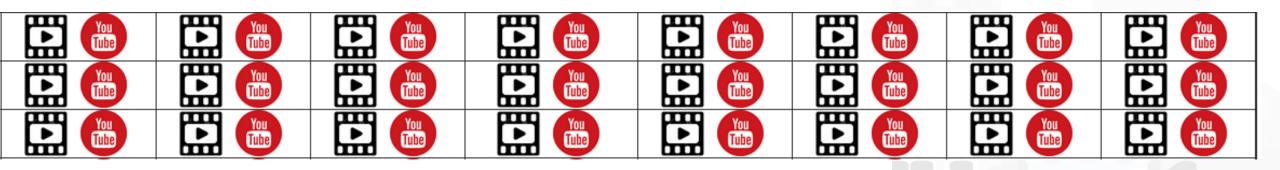

Snap4City (C), February 2024

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CSNAP4INDUSTRY

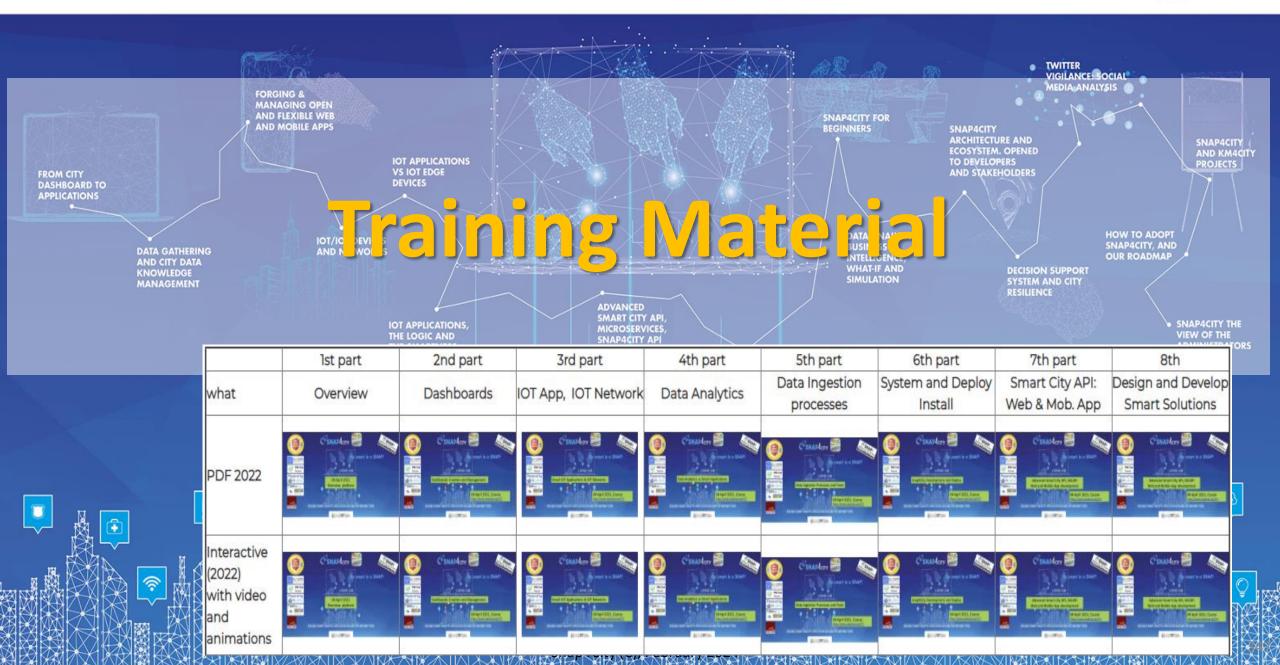





Note on Training Material

- Course 2023: <u>https://www.snap4city.org/944</u>
 - Introductionary course to Snap4City technology
- Course https://www.snap4city.org/577
 - Full training course with much more details on mechanisms and a wider set of cases/solutions of the Snap4City Technology
- Documentation includes a deeper round of details
 - Snap4City Platform Overview:
 - https://www.snap4city.org/drupal/sites/default/files/files/Snap4City-PlatformOverview.pdf
 - Development Life Cycle:
 - https://www.snap4city.org/download/video/Snap4Tech-Development-Life-Cycle.pdf
 - Client Side Business Logic:
 - https://www.snap4city.org/download/video/ClientSideBusinessLogic-WidgetManual.pdf
- On line cases and documentation:
 - <u>https://www.snap4city.org/108</u>
 - <u>https://www.snap4city.org/78</u>
 - <u>https://www.snap4city.org/426</u>

Snap4City

Switch To New Layout (Beta)

User: paolo.disit, Org: DISIT Role: AreaManager, Level: 3

LOGOUT

My Snap4City.org

- 🐥 Tour Again
- www.snap4solutions.org
- Oashboards (Public)
- Dashboards of My Organization
- My Dashboards in My Organization
- My Data Dashboard Dev Kibana
- Extra Dashboard Widgets
- 🔟 Data Management, HLT 🔻
- 📜 Knowledge and Maps 💌
- Processing Logics / IOT App
- Entity Directory and Devices
- Resource Manager
- Development Tools
- 🚳 Management 🔻
- Decision Support Systems
- Deploy and Installation
- Help and Contacts 💌
- Documentation and Articles
- 💧 My Profile 🔻
- Km4City portal
- DISIT Lab portal


Snap4City

Username: paolo.disit

Search

2023 new

roottooladmin1

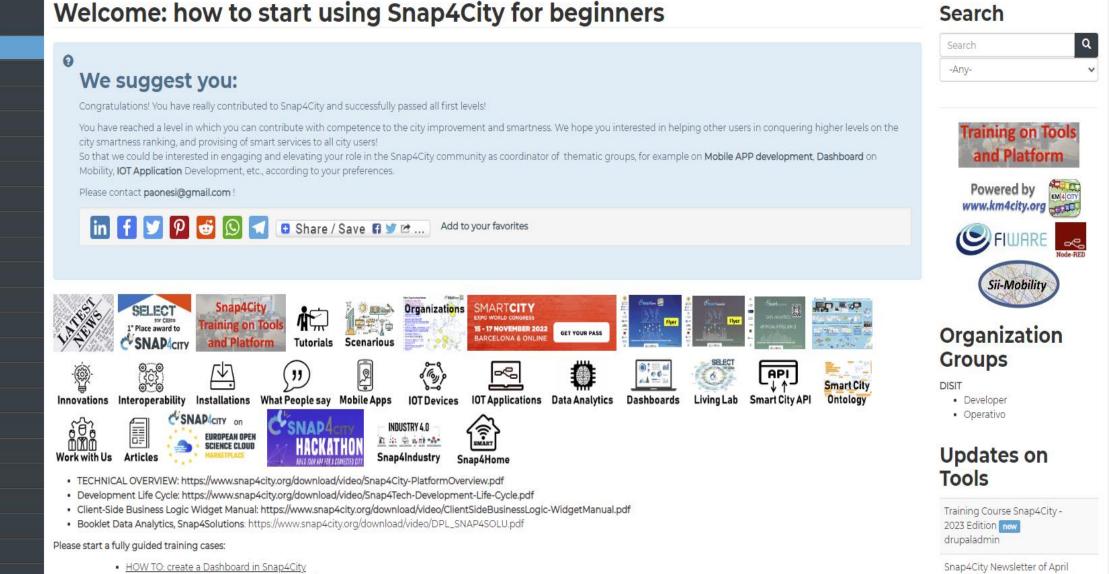

 HOW TO: add a device to the Snap4City Platform HOW TO: add data sources to the Snap4City Platform

Home / Tutorials and Videos / Welcome: how to start using Snap4City for beginners





Home How and Why To Use it - Tools - Tutorials and Videos -



v

HOW ARE YOU GOING TO BUILD THE FUTURE?

Snap4City: a framework for rapid implementation of Decision Support Systems and Smart Applications.







Q

×

Search

Search

-Any-

Snap4City: Smart aNalytic APp builder for sentient Cities and IOT

You can't delete this newsletter because it has not been sent to all its subscribers.

Entity Directory and Devices	~	WHAT IS SELECT Snap4City I' Place award to Training on Tools	Training on Tools
Resource Manager	~	Snap4City Snap4City Training on Tools and Platform Tutorials Scenarious	and Platform
Development Tools	~	SMARTCITY EXPO WORLD CONGRESS 15 - 17 NOVEMBER 2022 GET YOUR PASS	Powered by
Management	~	15 - 17 NOVEMBER 2022 BARCELONA & ONLINE GET YOUR PASS	FIWARE _
Decision Support Systems	~		Sii-Mobility
Deploy and Installation	×	What People say Mobile Apps IOT Devices IOT Applications Data Analytics Dashboards Living Lab Smart City API Ontology Work with Us	
Help and Contacts	~		Organization
Documentation and Articles	~	Articles	Groups DISIT
<u>Policy Cookies Policy</u>	⇔ €	 TECHNICAL OVERVIEW: https://www.snap4city.org/download/video/Snap4City-PlatformOverview.pdf Development Life Cycle: https://www.snap4city.org/download/video/Snap4Tech-Development-Life-Cycle.pdf 	 Developer Operativo
DEGLI STUDI	DISIT DISIT	Client-Side Business Logic Widget Manual: https://www.snap4city.org/download/video/ClientSideBusinessLogic-WidgetManual.pdf Booklet Data Applytics_Snap4Solutions: https://www.snap4city.org/download/video/DBL_SNAP4SOLU.pdf	Undates on

2023 booklets

• Smart City





https://www.snap4city.org /download/video/DPL_SN AP4CITY.pdf Snap4City (C), February 2024

https://www.snap4city.org/d ownload/video/DPL_SNAP4I NDUSTRY.pdf

Industry





• Artificial Intelligence





https://www.snap4city.o rg/download/video/DPL SNAP4SOLU.pdf







Search

Search

- Free Registration on Snap4City.org
 - Please select DISIT ORG to be sure to access at the examples
 - Most of the cities / tenant are private and they do not left much visible
- What you get is probably the 10% of what is on the platform \bigcirc
- Training: https://www.snap4city.org/577
- Scenarious: <u>https://www.snap4city.org/4</u>
- Publications: https://www.snap4city.org/426
- WEB pages: https://www.snap4city.org/78
- SEARCH on the right side

Q





/files/files/Snap4City-

PlatformOverview.pdf


Snap4City (C), February 2024

1







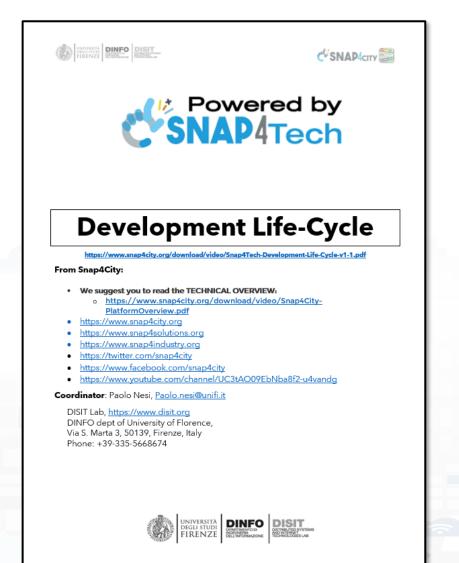

1

Development https://www.snap4city.org/d ownload/video/Snap4Tech-**Development-Life-Cycle.pdf**









<u>Client Side Business Logic</u>

UNIVERSITÀ DIGLI STUDI FIRENZE DIMONSON DISIT

🛠 SNAP4сіту 🧱





Client-Side Business Logic Widget Manual

From Snap4City:

- We suggest you read <u>https://www.snap4city.org/download/video/Snap4Tech-Development-Life-Cycle.pdf</u>
- We suggest you read the TECHNICAL OVERVIEW:
 bttps://www.apaptoity.org/doupload/uidao/S
 - https://www.snap4city.org/download/video/Snap4City-PlatformOverview.pdf
- slides go to https://www.snap4city.org/577
- https://www.snap4city.org
- <u>https://www.snap4solutions.org</u>
- <u>https://www.snap4industry.org</u>
- <u>https://twitter.com/snap4city</u>
- https://www.facebook.com/snap4city
- https://www.youtube.com/channel/UC3tAO09EbNba8f2-u4vandg

Coordinator: Paolo Nesi, <u>Paolo.nesi@unifi.it</u> DISIT Lab, <u>https://www.disit.org</u> DINFO dept of University of Florence, Via S. Marta 3, 50139, Firenze, Italy Phone: +39-335-5668674



https://www.snap4city.org/d ownload/video/ClientSideBus inessLogic-

Snap4City (C), February 2024







SMART CITIES AND SMART INDUSTRY

Snap4City: FIWARE powered smart app builder for sentient cities




Commercial Overview





- <u>https://fiware-</u>
 <u>foundation.medium.com/snap4</u>
 <u>city-fiware-powered-smart-app-</u>
 <u>builder-for-sentient-cities-</u>
 <u>acfe24df49d5</u>
- <u>https://www.snap4city.org/drup</u> <u>al/sites/default/files/files/FF_Im</u>
 <u>pactStories_Snap4City.pdf</u>

SCALABLE SMART ANALYTIC APPLICATION BUILDER FOR SENTIENT CITIES



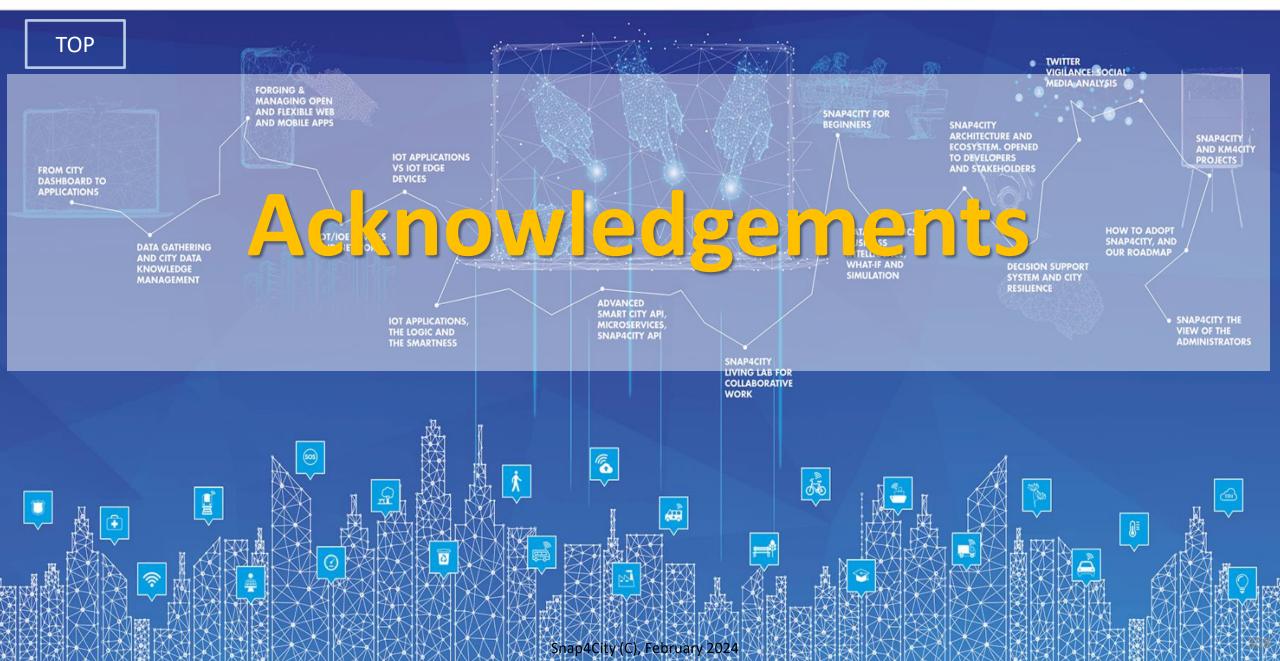

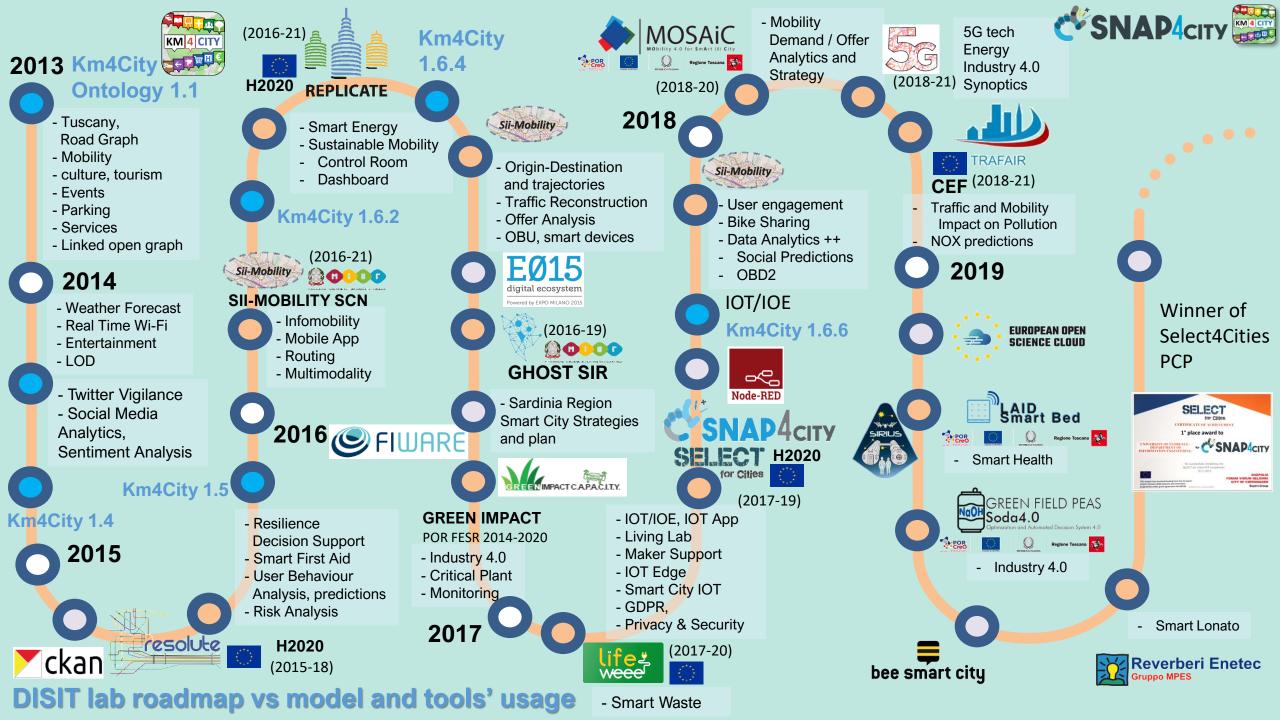

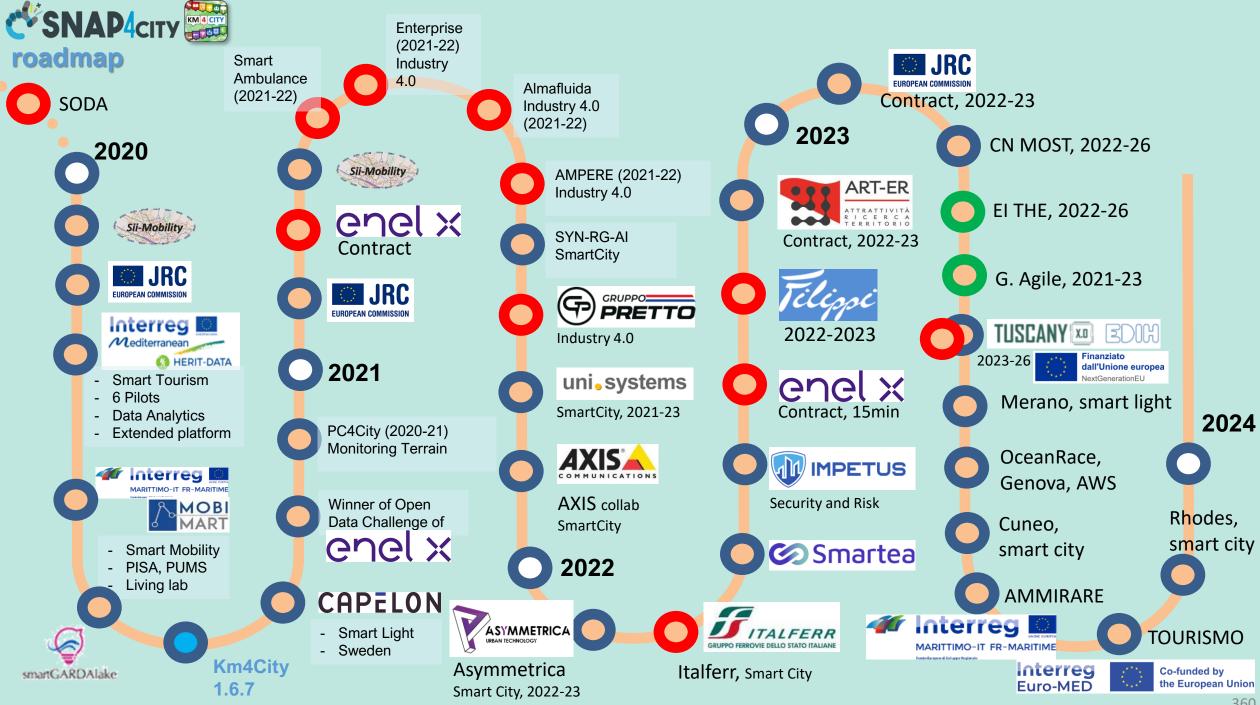







Be smart in a SNAP!



7-9 November 2023, Barcelona, Spain

SMARTCITY EXPO WORLD CONGRESS

Visit Snap4City in Hall 1



CONTACT

TOP

DISIT Lab, DINFO: Department of Information Engineering Università degli Studi di Firenze - School of Engineering

Via S. Marta, 3 - 50139 Firenze, ITALY https://www.disit.org

www.snap4city.org



Email: snap4city@disit.org

Office: +39-055-2758-515 / 517 Cell: +39-335-566-86-74 Fax.: +39-055-2758570